1894 Sanborn's Surveys of the Whiskey Warehouses of Kentucky and Tennessee

TRIPLICATE 15918

PUBLISHED FROM SURVEYS
MADE EXPRESSLY FOR THIS WORK
BY THE
Sanborn-Perris Map Co. LIMITED
115 BROADWAY, NEW YORK

TRIPLICATE

KEY

- FIRE PROOF BUILDING
- IRON BUILDING
- BRICK BUILDING WITH METAL CORNICE
- FRAME
- SIDE
- STONE FRONT
- BRICK SPECIAL
- WITH FRAME SIDE.
- FRAME BUILDING, NOT A SPECIAL
- SPECIAL
- WALL 1ST, NO OPENINGS THROUGH IT
- WITH OPENINGS
- FIRE WALL 6 INCHES ABOVE ROOF
- 12
- 18
- 24
- OPENING IN DIVISION WALL WITH IRON DOOR
- WINDOWS WITH IRON SHUTTERS
- WINDOW OPENING IN 1ST STORY
- 2ND
- WINDOWS
- 2D & 3D STORIES
- 2D & 4TH
- STABLE
- Brick. Iron CHIMNEYS
- Horizontal Vertical STEAM BOILERS
- HYDRANTS

Corrected to

Copyright, 1894, by the Sanborn-Perris Map Co, Limited.

[1894] KENTUCKY 2nd (1-10), 5th (14-33), 6th (40-49), 7th (52-64), 8th (68-80) DISTRICTS
TENNESSEE 5th (94-101) DISTRICT

Index of Kentucky and Tennessee Distilleries and Warehouses.

KENTUCKY.

A

Adams, F. W., Anderson Distillery, ... 20
" Taylor & Co. (J. G. Mattingly Co.),... 18
" " " " (A. Mayfield & Co.),..... 28
" " " " (E. L. Miles),..... 29
" " " " (New Hope Distilling Co.) 29
Allen-Bradley Co. Allen Bradley Distillery,..... 19
" " " Elk Run Distillery,..... 19
" " " Warehouses, ... 20
" " Distillery (Allen Bradley Co.),... 18
American Distilling Co. (E. M. Babbitt), ... 15
Anchor Distilling Co. (J. B. Wathen & Bros. Co.) 22
Anderson & Nelson Distilleries Co., ... 20
" " " " " " Anderson D'y 20
" " " " " " Nelson Dist'y 20
" " " " " G. C. Buchanan Distillery 20
" Distil'y (Anderson & Nelson Distil. Co.) 20
" County Distillery (John E. Day), ... 68
" " " (Edw. Murphy & Co.) 71
Applegate & Sons (J. B. Wathen & Bros. Co.)... 22
" " " C. L. & Co. Beechwood Distillery,.... 5
Arlington Distilling Co. (S. J. Greenbaum), ... 54
Arnold Spring Distillery (J. N. Blakemore),..... 58
Ashbrook, F. S., Old Van Hook Distillery,..... 45
Ashland Distillery (Wm. Tarr Co.), ... 62
Ashton Distilling Co.'s Distillery, ... 25
Astor Distillery (Moore & Sellinger), ... 18
Atherton Dist'y (J. M. Atherton & Co.s. Premises) 27
" J. M., & Co., Bonded W. H. No. 87. D. 28
" " " Premises, ... 27 & 28
" " " " Atherton Dist. 27
" " " Mayfield " 28
Atkerson, M. M., Distillery, ... 9
Atwood Distilling Co. (J. B. Wathen & Bros. Co.) 22

B

Babbitt, E. M. (American Distilling Co.),..... 15
" " (Rugby Distillery Co.), ... 17
Baer, Ben (Commonwealth Dist. Co.), ... 61
Bakrow, C., & Co. (American Distilling Co.), .. 15
Ballard & Lancaster (Rich. Cummings),..... 31
Barber & Ferreill, Distillery,..... 24
" J. T., & Co. (American Distilling Co.),.. 15
Barbead, J. T., & Co. (Rugby Distillery Co.),.... 17
Bartley, Johnson & Co. (J. B. Wathen & Bros. Co.) 22
Beam & Hart, Distillery, ... 27
" J. H. (Early Times Distillery Co.), ... 25
Beechwood Distillery (C. L. Applegate & Co.),... 5
Belle of Anderson Distillery (S. J. Greenbaum), 54
" " Nelson Distilling Co., ... 29
Belmont Distillery (Moore & Sellinger),..... 18
Bergenthal, W., Co. (Melwood Distillery Co.),.. 18
Berkele, W., Distillery,..... 70
Best & Son, Distillery,..... 10
Big Spring Distillery (Nelson County Dist. Co.) 26
Blair & Ballard, Distillery,..... 33
Blakemore, J. N., Arnold Spring Distillery,.... 58
Block House Dist'g'r Co. (J. B. Wathen & Bros.Co.) 22
Boiling Spring Distillery, ... 68
Bolstrick & Callaghan Co. Distillery,..... 23
" G. D. (Bolstrick & Callaghan Co.),..... 23
Bon Harbor Distilling Co.'s Bonded W. H. (Rock Spring Dist. Co.), ... 2
Bond & Lillard, Distillery,..... 71
" T. H., & Bro., Distillery,..... 70
Boone & Bro., Distillery, ... 25
" County Dist'g Co. (Freiburg & Workum), 43
" Knoll Distillery,..... 66
Bourbon Distilling Co,..... 56
Bowman, J. M., Distillery,..... 74
Boyers Distilling Co., ... 68
Boyle, S. A., Distillery,..... 74
Braun, J. J., ... 45
Breidenbach, C. F., Distillery,..... 70
Brightwood Distill'g Co. (Rosenfield Bros. & Co.) 21
Britton, S. F., Distillery, ... 74
Brooks, N. B., ... 74
Brookside Distilling Co. (Elk Run Distillery),.... 19
Brown, Forman & Co. (Melwood Distillery Co.), 18
Brown, J. T. S., & Sons (J. B. Wathen & Bros.Co.) 22
" " " Mayfield & Co.),..... 28
Brownfield, W. W. (A. Mayfield & Co.),..... 28
Bryan, J. C., Distillery, ... 9
Buchanan, G. C., Distillery (Anderson & Nelson Distilleries Co.), ... 20
Buffalo Spring Distillery (Mullins & Cringler),... 57
Burks, G. D., Distillery,..... 31
Burnam, Bennett & Co., Warwick Distillery,.... 73

C

California Vineyard Co. (Melwood Distillery Co.) 18
Callaghan, F. (Boldrick & Callaghan Co.),..... 23
Camp Nelson Distillery (E. J. Curley),..... 75
Carlisle Distillery (E. H. Taylor, Jr., Co.),..... 52
Carter, J. T. (Atherton Distillery),..... 27
Cave Spring Distillery (J. L. Reavis),..... 9
Cedar Brook Distill'y (W. H. McBrayer's Ex'ors) 79
" " " Warehouses, ... 79
" " Run Distillery (J. & J. M. Saffel),..... 58
Chapeze, B., Distillery,..... 24
Chicken Cock Distillery (G. G. White Co.),..... 56
Chipman & Riggle, Distillery, ... 45
Cleveland Distilling Co. (T. S. Moore),..... 32
Cliff Spring Distillery (Thomas B. Ripy),..... 72
Clover Distillery (Thomas B. Ripy),..... 78
Cochran, John, & Co. Spring Knoll Distillery,.... 57
Cold Spring Distilling Co. (Anderson Distillery), 20
" " " " (T. S. Moore),..... 32
" " Dist'y (Jackson Vanarsdell Dist. Co.) 69
Collins, W. M., & Co. (J. G. Mattingly Co.),.... 16
" " " " (Greenbrier Dist. Co.),.. 25
Columbia Distilling Co. (Latonia Dist. Co.),.... 46
Comet Distilling Co. (J. B. Wathen & Bros. Co.), 22
Commercial Dist'g Co. (J. B. Wathen & Bros. Co.), 22
Commonwealth Dist'g Co. (Stoll, Vanuatta & Co.) 61
Cowles, O. W., Distillery,..... 45
" O. B., & Co., Elk Run Distillery,..... 19
Coon Hollow Distillery (Nelson County Dist. Co.), 26
Cowles, O. W., Distillery,..... 45
Coy & Ross Distillery,..... 74
Craig, C. W., & Co. (Mellwood Distillery Co.),.. 18
" F. G., Distillery,..... 42
Cream of Anderson Distillery (Commonwealth Dist'y Co.),..... 61
Cream of Kentucky Dist'g Co. (Atherton Dist'y), 27
" " Nelson Dist'g Co. (American Dist. Co.), 15
Crystal Spring Distilling Co. (C. Stege),..... 15
Cumberland Distillery (C. Kobert & Co.),..... 33
Cummins, Richard, Distillery,..... 31
" R., & Co. (Richard Cummins),..... 31
Cunningham, J. A. (J. G. Mattingly Co.),..... 16
Curley, E. J., & Co., Boone Knoll Distillery,.... 76
" " Camp Nelson Distillery,..... 75

D

Dant, J. B., Distillery,..... 26
" W., ... 31
Darling Distilling Co., Old Darling Distillery,.. 31
Davenport & Morris (Elk Run Distillery),..... 19
Daviess County Distilling Co.,..... 6
Davis, J. M. (Latonia Distilling Co.),..... 46
Day & Huff, Bonded Warehouse (John E. Day), 68
" John E., Anderson County Distillery,.... 68
Dedman, C. M., Distillery,..... 69
Double Spring Distillery (Jos. Schneider),..... 4
Dowling Bros., Old D. L. Moore Distillery,..... 69
" John & Edw. (Waterfill & Frazier),.... 77
Ducker, J., & Son, Distillery,..... 45
" Perry, Distillery,..... 45
Dulaney, G. W., Distillery,..... 1
Dundee Distilling Co. (Melwood Distillery Co.), 18
Durham Distillery (Commonwealth Dist. Co.),.. 61

E

Eagle Distillery Co.,..... 8
Early Times Distillery Co.,..... 25
Edgecliff Distillery (Commonwealth Dist. Co.), 61
Edgewater Distillery (T. J. Megibben Co.),.... 48
Edgewood Distillery (Commonwealth Dist. Co.), 61
" Distilling Co. (Elk Run Distillery),.. 19
" " " (W. H. Traylor),..... 80
Elk Run Distillery (Allen-Bradley Co.),..... 19
Elm Hill Distilling Co. (Elk Run Distillery),.... 19
Elmwood Distilling Co. (J. G. Mattingly Co.),.. 16
" " " (J. B. Wathen & Bros. Co.), 22

F

Fechheimer Bros. (Commonwealth Dist. Co.),.. 61
Fern Cliff Distillery Co.,..... 21
Fible & Crabb Distilling Co.,..... 14
Field, J. W. M., Distillery,..... 2
Fileman, M., & Co. (J. B. Wathen & Bros. Co.), 22
Fitzgerald, J. E., Distilling Co. (Old Taylor Dist'y), 63
Ford Bros., Distillery,..... 26
Fountain Spring Distilling Co. (J. B. Wathen & Bros. Co.),..... 22
Frazier, W. J., Distillery,..... 63
Freiburg & Workum, Distillery (Boone County Dist. Co.),..... 43
Friedman, Kuhn & Co. (Early Times Dist. Co.), 25

G

Gaines, W. A., & Co., Hermitage Distillery,..... 60
" " " Old Crow Distillery,..... 58
Garland Distillery,..... 15
Garrett, S. A., Distillery,..... 74
Gehner, H., Dist'y Co.'s Bonded Wareho. (Sour Mash Dist'y Co.),..... 5
Gerdes, G. & B., Distillery (Head & Beam),..... 28
Glen Spring Distillery Co. (C. Stege),..... 54
Glenarme Distillery (S. J. Greenbaum),..... 54
Glenmore " (R. Monarch & Co.),..... 10
Grabfelder & Tachau (A. Mayfield & Co.),..... 28
" " " (S. J. Greenbaum),..... 54
Graf, A., & Co. (Atherton Distillery),..... 27
Grand Marshall Distill'y Co. (Elk Run Distill'y), 19
Graves, C. H., & Son (Elk Run Distillery),..... 19
Greenbaum, S. J., Belle of Anderson Distillery, 54
" " Glenarme Distillery,..... 54
Green Brier Distillery Co. (W. M. Collins & Co.), 25
Grimes, J. A., Distillery,..... 66
Gwyn Spring Distillery (McGee & Beam),..... 30

H

Hackley, S. O. (Hoffman & Hackley),..... 68
Hagner, J. D.,..... 74
Hanning, John, Distilling Co.,..... 3
Harbers, G. H., & Co. (Early Times Distill'g Co.), 25
Harding, F. V. (Marion County Distillery Co.), 17
Harper & Alexander, Distillery,..... 77
Harris, W. S., Distillery,..... 17
Harrison, J. T., Distillery,..... 10
Hartman & Robinson (Early Times Distill'g Co.), 25
Hawkins & Son. Distillery,..... 10
" B. D., & Bro., Distillery,..... 70
Hayden, R. B. (Greenbrier Distilling Co.),..... 25
" " & Co. (Barber & Ferreill),..... 24
Head & Beam, Distillery,..... 28
Headley & Peck Co., Wayland Distillery,..... 59
Hellar, E., & Co. (Latonia Distilling Co.),..... 46
Hermitage Distillery (W. A. Gaines & Co.),.... 60
Hillary & Knott (A. Mayfield & Co.),..... 28
Hinds, J. D. (A. Mayfield & Co.),..... 28
Hoffheimer & Co. (Latonia Distilling Co.),..... 46
" E. (Marion County Distillery Co.),.. 17
Hoffman & Hackley, Distillery,..... 68
Hollinbach, P. (Stitzel Bros.),..... 22
Howard & Co. (A. Mayfield & Co.),..... 28
Hume, W. S., & Co., Silver Creek Distillery,.... 73

I

Indian River Distilling Co. (Atherton Distillery), 27

J

Jackson Vanarsdell Dist. Co. (Cold Spr'g Dist'y), 69
James, J. W., & Co., Distillery,..... 80
Jett Bros., Distillery,..... 44
Johnson, H. Clay (Rugby Distillery Co.),..... 17
" W. W., & Co. (Commonwealth Dist. Co.), 61
Jones, S., Distilling Co. (Gwyn Spring Distill'y), 30

K

Keller, A., Co.'s Distillery,..... 41
Kentucky Criterion Co. (J. B. Wathen & Bros. Co.) 22
" Distilling Co. (J. G. Mattingly Co.),... 16
Kenwood Distilling Co. (A. Mayfield & Co.),.... 28
King & Smith, Distillery,..... 9
" M. J., & Co. (Stitzel Bros.),..... 22
Kinsinger, Fred. (Latonia Distilling Co.),..... 46
Klein Bros. & Hyman (Elk Run Distillery),..... 19
" " " (Marion Comn'y Dist'g Co.), 17
Knob Creek Distilling Co. (Atherton Distillery), 27
Kobert, C., & Co., Cumberland Distillery,..... 33
Kuhlman, B., & Co. (American Distilling Co.), 15

L

Labrot & Graham, Old Oscar Pepper Distillery, 57
Lacey, Bucker, Gerald & Miller, Mill Creek Dist'y 42
Lancaster Distilling Co.,..... 30
" R. B., Distillery,..... 33
Latonia Distilling Co. (T. Kissinger),..... 46
" Club Distilling Co. (Latonia Dist'y Co.), 46
Lavel, J. & F., Distillery,..... 59
Lee, J. L., Distillery,..... 23
Lehigh Distilling Co. (J. B. Wathen & Bros. Co.) 22
Lenox Club Distilling Co. (Elk Run Distillery), 19
Levy, Harry M. (Richwood Distilling Co.),..... 49
Lickskillet Distillery (W. H. Myer),..... 9
Limestone Distillery (Lida C. Rogers),..... 64
Live Oak Distilling Co. (Mellwood Dist. Co.),.. 18
Loewe Bros. (Latonia Distilling Co.),..... 46
Log Cabin Distilling Co.,..... 64
Lyn Wood Distillery (Commonwealth Dist. Co.), 61

M

McBrayer, J. H. Distilling Co.,..... 64
" W. H., Executors' Cedar Brook Dist. 79
McClaskey, R., & Son (Ashton Distilling Co.),.. 25
McCullogh, J. W., Distillery,..... 8
McGee & Beam, Gwyn Spring Distillery,..... 30
" L. (T. S. Moore),..... 32
McKenna, H., Distillery,..... 39
Maddux Distilling Co.,..... 47
" Hobart & Co. (Latonia Distilling Co.),.. 46
Marion County Distillery Co.,..... 17
Master, J. W., Warehouses,..... 74
Mattingly, B. F., Distillery,..... 23
" J. G., Co.'s Distillery,..... 16
" J. G., & Son, Distillery,..... 15
" M. P., Old W. S. Stone Distillery,.... 6
" & Moore-Simms & Edelen Distillery, 32
May Queen Distilling Co. (Atherton Distillery). 27
Mayer, Kuhn & Friedburg (Early Times Dis. Co.), 25
Mayfield, A., & Co., Free W. H. No. 1 (J. M. Atherton & Co. Premises),..... 27
Mayflower Distilling Co. (American Dist.Co.),.. 15
Medcalf & Bray, Distillery,..... 8
" G. W., & Co. Bonded W. H. (Medcalf & Bray),..... 8
Megibben Excelsior Co. Distillery,..... 48
" T. J., Co.'s Edgewater Distillery,..... 48
Mellwood Distillery Co.,..... 18
Merritt Bros. Distillery,..... 64
Meylers, R. J., Spring Water Distillery,..... 4
Miles, E. L., Distillery,..... 29
" " (New Hope Distillery),..... 29
Mill Creek Distillery (Lacey, Bucker, Gerald & Miller),..... 42
Miller, J. W., & Co. Distillery,..... 80
Miller, W., & Co. (Atherton Distillery),..... 27
Million, E. & E., Distillery,..... 74
" E. C., Distillery,..... 74
Mock, W. R., Old Mock Distillery,..... 74
Monarch, R., Bonded W. H. No. 2 B (Daviess County Dist'y Co.),..... 6
Monarch, R., & Co., Glenmore Distillery,..... 10
" T. J. (S. J. Greenbaum),..... 54
Moore & Sellinger, Astor Distillery,..... 18
" " " Belmont " 18
" D. L., Cedar Brook Distillery,..... 79
" R. L., & Co. (Rugby Distillery Co.),..... 17
" T. S. & D. D. Beam (Gwyn Spring Dist'y) 30
" " Distillery,..... 32
" Tom (T. S. Moore),..... 32
Morris Powers & Co. (Early Times Dist. Co.),.. 25
Mountain Lily Distilling Co. (Head & Beam),... 28
Mullins & Crigler Buffalo Spring Distillery,.... 57
" " " (J. B. Wathen & Bro. Co.),.... 22
Murphy & Barber Distillery,..... 24
" Edw., & Co., Anderson County Distill'y 71
Mutual Distilling Co.,..... 7
Myer, W. H., Lickskillet D.stillery,..... 9

N

Nall, A. G. (Early Times Distilling Co.),..... 25
National Distilling Co. (Marion County Dist. Co.) 17
Nelson County, Ky., Dist'g Co.,..... 26
" " " " Big Spring Dist. 26
" " " " W. Coon Hollow " 26
" Distillery (Anderson & Nelson Dist. Co.) 20
New England Distilling Co.,..... 47
" Hope Distillery (E. L. Miles),..... 29
Newton Bros. Distillery,..... 80
Normandy Distilling Co. (Mellwood Distillery Co.) 18

O

O. F. C. Distillery (E. H. Taylor, Jr., Co.),..... 52
Oak Glen Distillery Co. (J. B. Wathen & Bro. Co.) 22
Oakdale Distilling Co. (Elk Run Distillery),.... 19
Oakview " " " " " " 19
Oakwood Distillery (Commonwealth Dist. Co.),.. 61
" Distilling Co. (Poyntz Bros. Co.),..... 64
O'Bryan, S., & Co. (Mayfield & Co.),..... 28
O'Keefe, T. E., & Co. (Atherton Distillery),..... 27
" " " (Mayfield & Co.),..... 28
Old Club House Distill'g Co. (Mellwood Dist. Co.) 18
" Crow Distillery (W. A. Gaines & Co.),..... 58
" Darling Distillery (Darling Dist. Co.),..... 31
" D. L. Moore Distillery (Dowling Bros.),..... 69
" Fort Spring Distillery (J. B. Thompson),.... 69
" Judge Distilling Co.'s Old Judge Distillery, 59
" Lexington Club Dist. Co.'s Union Mill Dist'y 75
" Mock Distillery (W. R. Mock),..... 74
" Oscar Pepper Distillery (Labrot & Graham) 57
" Taylor Distillery (E. H. Taylor, Jr., & Sons) 63
" " Nelson Distilling Co. (H'y Sutherland) 30
" Turk Distillery Co. (Early Times Dist. Co.), 25
" Van Hook Distillery (F. S. Ashbrook),..... 45
" W. S. Stone Distillery (M. P. Mattingly), .. 6
Owl Club Distilling Co. (Commonwealth Dist Co.) 61

P

Paris Distilling Co. (N. J. Walsh),..... 53
Parkhill, D. (Marion County Distilling Co.),.... 17
Peacock Distillery Co.,..... 55
Pearl of Kentucky Distilling Co. (Elk Run Dist'y) 19
" " Nelson Distilling Co. (H'y Sutherland) 30
Pepper Distillery (Jas. E. Pepper & Co.),..... 61
" Jas. E., Pepper Distillery,..... 61
" " " & Co., Pepper Distillery,..... 61
" " " Dist. (formerly Nat. Harris) 59
" R. P., Distill'g Co. (Allen-Bradley Dist'y) 19
Pleasant Valley Distilling Co. (Latonia Dist. Co.) 46
Pleasure Ridge Distillery,..... 74
Pogue, H. E. (John N. Thomas),..... 64
Portland Distilling Co. (Marion Co. Distill'g Co.) 17
Poyntz Bros. Co., Distillery,..... 64
Purdy & Co., Distillery,..... 31

Q

Quick, G. E., Distillery,..... 47

R

Reavis, J. L., Cave Spring Distillery,..... 9
Redmon Distilling Co.,..... 41
Reismeyer, Bernheim, Boxinger & Co. (Stitzel Bros.),..... 22
Reynolds, J. M., Distillery,..... 9
Rich Grain Dist'g Co. (J. B. Wathen & Bro. Co.) 22
Richwood Distillery Co. (H. M. Levy),..... 49
Ripy, J. P., Distillery,..... 77
" Thos. B., Cliff Spring Distillery,..... 72
" " Clover Bottom Distillery,..... 78
Roach, J. R., Distillery,..... 21
Roberts, T. T., " 74
Robertson, P. E., & Co., Distillery,..... 1
Robison, George W., Jr., Co., Distillery,..... 47
Rock Spring Distilling Co.,..... 2
Rogers, J. H., Limestone Distillery,..... 64
" Lida C., " 64
Rolling Fork Distillery (Wathen, Mueller & Co.) 33
Rose, R. L., & Co. (J. G. Mattingly Co.),..... 16
Rosenfield Bros. & Co., Distillery,..... 21
Rugby Distillery Co.,..... 17
Runnymede Distilling Co.,..... 18

S

S. S. S. Distilling Co. (Mellwood Dist. Co.),..... 18
Sachs, D., & Son (J. B. Wathen & Bros. Co.),.. 22
Saffel, J. & J. M., Cedar Run Distillery,..... 58
" W. R., Distillery,..... 77
St. Bernard Distilling Co. (Elk Run Distillery), 19
St. Bernard Dist'g Co. (Allen-Bradley Distill'y) 19
Sale, S. R., & Co. (J. G. Mattingly Co.),..... 16
Samuels Distilling Co.,..... 32
" T. W., Distillery,..... 24
Sawyers Distilling Co. (J. B. Wathen & Bro. Co.) 22
Schneider, Jos., Double Spring Distillery,..... 4
Schwabacher & Co. (J. B. Wathen Bros. Co.),.. 22
Schwartz, J. B. (J. B. Wathen Bros. Co.),..... 22
" J., Marion County Distilling Co.,.... 17
Searcy, J. S., & Co., Boiling Spring Distillery,.. 68
" " (J. W. Stevens & Co.),..... 68
Sellers, Z. T. (Sellers & Howard),..... 63
Sharpe, G. R., Co., Distillery,..... 42
Silver Creek Distillery (W. S. Hume & Co.),.... 73
Simon, L., & Co. (American Distilling Co.),.... 15
Small Grain Distill'g Co. (Com'wealth Dist. Co.), 61
Smith & Henry, Distillery,..... 74
" Smith, " 31
" H. W., & Co. (Elk Run Distillery),..... 19
" " " (Latonia Distilling Co.),.... 46
Sour Mash Distilling Co.,..... 5
Spring Hill Distillery (John Cochran & Co.),.... 57
" Water Distillery (R. J. Meylers),..... 4
Stagg, Geo. T., Co. (E. H. Taylor, Jr., Co.),.... 52
Standard Distill'g Co. (Marion County Dist. Co.), 17
Star Distilling Co. (Elk Run Distillery),..... 19
" " " (Latonia Distilling Co.),.... 46
Stege, C., Crystal Spring Distillery,..... 15
" " Garland Distillery,..... 15
" " (Glen Spring Distilling Co.),..... 54
Steig Reisling (S. J. Greenbaum),..... 54
Stein Bros. (Elk Run Distillery),..... 19
Stern, Emil (S. J. Greenbaum),..... 54
Stevens, J. W., & Co., Distillery,..... 68
Stitzel Bros., Distillery,..... 22
Stoll, A. P. (Commonwealth Dist. Co.),..... 61
" Vannatta & Co. (Commonwealth Dist. Co.), 61
Strader, R. S., & Son (Ashland Distillery),..... 62
Sugar Corn Distill'y Co. (J. G. Mattingly Co.),.. 16
" " " " (J. B. Wathen & Bros. Co.) 22
Sun Beam Distilling Co. (Rosenfield Bros. & Co.), 21
Sunny Brook Distill'g Co. (J. G. Mattingly Co.), 16
" " " " (Rosenfield Bros. & Co.) 21
Sutherland, H., Distillery,..... 30
Sweetwood Distill'g Co. (J. B. Wathen & Bros. Co.), 22
Sycamore Distilling Co. (Elk Run Distillery),.... 19

T

Targer, C. H. (Stitzel Bros.),..... 22
Tarr, Wm., Co., Ashland Distillery),..... 62
Taylor & Williams, (J. B. Dant),..... 26
" " " (Rugby Distillery Co.),..... 17
" E. H., Jr. (Old Taylor Distillery),..... 63
" " " & Sons (Old Taylor Distillery), 63
" " " Co., Carlisle Distillery,..... 52
" " " " O. F. C. Distillery,..... 52
" G. W., Co. (Mill Creek Distillery),.... 42
Taylor–Whitehead (Atherton Distillery),..... 27
Thomas, John N., Distillery,..... 64
Thompson, J., & Co. (Stitzel Bros.),..... 22
" J. B. (Old Fort Spring Distillery,.... 69
" Wilson & Co. (Rugby Distillery Co.), 17
Tilford, H. J. (J. G. Mattingly Co.),..... 16
Tousig L., & Co. (Elk Run Distillery),..... 19
Traylor, W. H. (Edgewood Distilling Co.),..... 80
Turner Looker Co. (J. B. Wathen & Bros. Co.),.. 22
Twing Spring Distilling Co. (E. L. Miles),..... 29
Tyron Distilling Co. (Elk Run Distillery),..... 19

U

Union Distilling Co. (Elk Run Distillery),..... 19
" Mill Distillery (Old Lexingt. Club Dist. Co.) 75
" Mills Distilling Co. (Latonia Distill'g Co.) 46
Uri, W. M., & Co. (A. Mayfield & Co.),..... 28

V

Victor Distilling Co. (Elk Run Distillery),..... 19

W

Walker, Felix G., Distillery,..... 32
" J. L., Distillery,..... 70
Walsh, James & Co., Distillery,..... 47
" N. J. (Paris Distilling Co.),..... 53
Warwick Distillery (Burnam, Bennett & Co.),.. 73
Waterfill & Frazier (J. & E. Dowling),..... 77
" J. M., & Co., Distillery,..... 77
Wathen, J. B. (J. B. Wathen & Bros. Co.),..... 22
" " & Bros. Co. Distillery,..... 22
" Mueller & Co., Rolling Fork Distillery, 33
Watson, J. W., & Co. (Poyntz Bros. Co.),..... 64
Weis, L., & Co. (J. B. Wathen & Bros. Co.,..... 22
West End Distilling Co. (J. G. Mattingly Co.),.. 16
Westheimer, F., & Son, Bonded W. H. (Sour Mash Dist. Co.),..... 5
Wheatley & Co., Distillery,..... 14
White, G. C., Co. Chicken Cock Distillery,..... 56
" Mills Distilling Co. (Latonia Dist. Co.), 46
Wiglesworth Bros. Co. Distillery,..... 42
Wiley Searcy Distillery,..... 70
Willow Creek Distill'g Co. (Rosenfield Bros. & Co.), 21
" Spring Distilling Co.,..... 26
Winstead Distilling Co.,..... 1
Wise, D., Distilling Co. (A. Mayfield & Co.),.. 28
Woodford Distilling Co. (J. S. Greenbaum),.... 54
Woodland Distillery (Headley & Peck Co.),.... 59
Worsham Distilling Co.,..... 1
Wright & Taylor (Early Times Dist. Co.),..... 25

Z

Zapp, L., & Co. (American Distilling Co.),..... 15

SECOND DISTRICT.

Reg. Dist. No.		Page
2		6
3		6
4		6
6		6
7		6
8		6
11		6
13		6
17		6
18		6
19		6
24		6
27		6
40		6
50		6
52		6
64		6
93		6
98		6
99		6
124		6
129		6
133		6
136		6
144		6
164		6
175		6
183		6

FIFTH DISTRICT.

Reg. Dist. No.		Page
2		16
3		16
4		16
5		16
7		16
8		16
10		16
12		16
14		16
20		16
34		16
78		16
87		16
97		16
101		16
105		16
107		16
111		16
145		16
146		16
165		16
169		16
174		16
229		16
230		16
239		16
240		16
241		16
263		16
266		16
276		16
271		16

Reg. Dist. No.		Page
272		32
276		25
294		26
297		21
299		33
353		32
354		15
355		32
357		31
360		17
363		22
364		18
368		19
369		19
370		23
371		30
372		17
375		33
376		31
379		26
401		24
405		26
409		31
410		32
413		14
414		17
415		30
420		24
422		25
429		31
442		25
450		26
453		34
461		26

Reg. Dist. No.		Page
135		97
210		101
211		101
225		100
388		101
392		95
393		99
397		96

Reg. Dist. No.		Page
498		96
503		99
505		98
514		96
515		99
517		95
521		97

SIXTH DISTRICT.

Reg. Dist. No.		Page
1		48
2		46
3		47
4		44
5		44
6		41
8		43
9		41
10		42
11		47
12		45
13		42
14		45
15		41
16		48
17		42
19		42
22		45
23		47
30		45
31		45
34		47
35		45
38		48
63		40

SEVENTH DISTRICT.

Reg. Dist. No.		Page
1		62
2		52
3		64
4		60
5		61
6		64

Reg. Dist. No.		Page
9		54
10		54
11		59
13		61
14		56
16		64
17		64
22		64
24		64
32		59
37		57
46		59
49		63
50		63
52		57
53		63
54		59
57		54
77		53
79		56
91		58
96		58
102		56
105		57
106		58
113		52

EIGHTH DISTRICT.

Reg. Dist. No.		Page
1		73
3		71
3		76
4		70
5		77
6		74
7		70

Reg. Dist. No.		Page
15		75
16		69
18		74
21		78
41		77
44		79
45		70
65		69
66		74
76		80
81		80
86		75
111		74
113		72
120		68
123		77
134		68
148		69
158		74
236		70
274		71
389		74
397		47
400		74
406		68
418		78
434		70
541		73
554		80
802		74
1335		74
1347		74
1363		74
1370		74

TENNESSEE.

B

Barnes, J. C., Double Spring Distillery,..... 95
Berry, Wm., Distillery,..... 101
Big Spring Distillery (F. J. Davis),..... 93
Bridges, John R., & Son, Pebbly Spring Dist'y, 98
Brinkley & Hornaday, Distillery,..... 99
Brown, Josephine, Wartrace Distillery,..... 98
Buvinger, C. H., & Co., Stonesboro Distillery, 101

C

Cascade Distilling Co.,..... 95
Cashion, John H., Hawthorne Distillery,..... 99
" & Martin, Wood, W. H. (Hawthe Dist.), 99
Cave Spring Distillery (Pitt Bros.),..... 97
Colsher Bros., Distillery,..... 94

D

Daniels, Jack, Distillery,..... 96
" W. R., & Co., Distillery,..... 96
Davis, F. J., Big Spring Distillery,..... 93
" G. W., Distillery,..... 100
Double Spring Distillery (J. C. Barnes),..... 95

E

Eastwood, J. R., Distillery,..... 94
Eaton, John, & Co., Distillery,..... 96

F

Fish Spring Distillery (E. Gouge),..... 100
Fry Bros., Distillery,..... 100

G

Gouge, Ezekiel, Fish Spring Distillery,..... 100
Green Brier Distillery (Louisa Nelson),..... 98

H

Hawthorne Distillery (J. H. Cashion),..... 99

J

Jones, W. S., Distillery,..... 94

K

Kinney & Co., Spring Creek Distillery,..... 97

L

Lewis, W. J., Distillery,..... 93

M

Miller, J. W., Distillery,..... 100
Mitchell, J. W. C., Distillery,..... 99
Mountain Spring Distill'y (Wakeman & Hodges), 94

N

Nelson, Chas., Greenbrier Distillery,..... 98
" Louisa, " 98

P

Patterson, B., Distillery,..... 99
Pebbly Spring Distillery (J. R. Bridges & Son), 98
Pitt Bros., Cave Spring Distillery,..... 97

R

Ragsdale & Peck, Wartrace Distillery,..... 98
Rogers, G. E., Distillery,..... 98

S

Snow Spring Distilling Co.,..... 97
Spring Creek Distillery (Kinney & Co.),..... 97
Stonesboro Distillery (C. H. Buvinger & Co.), 101
Swor, G. W., Distillery,..... 97

T

Thomas, J. J., & Co., Distillery,..... 94

Thomas, J. J., & Co., Bonded W. H. (Stonesboro Distillery,..... 101
Tolley & Eaton, Distillery,..... 101
" Ben, Distillery,..... 96
" John D. Distillery,..... 101

V

Vanzant, I., Distillery,..... 94

W

Wakeman & Hodges, Mountain Spring Distill'y, 94
Wartrace Distillery (Josephine Brown),..... 98
Woodard, J. H., Distillery,..... 97
Wooten, T. F., " 99

SECOND DISTRICT.

Reg. Dist. No.		Page
505		100

FIFTH DISTRICT.

Reg. Dist. No.		Page
2/22		97
5		98
11		94

Reg. Dist. No.		Page
14		100
20		96
32		94
65		100
67		99
64		99
83		98
110		97

Reg. Dist. No.		Page
524		98
525		94
527		95
528		94
531		94
535		95
535		101

Reg. Dist. No.		Page
538		100
540		94
546		95
547		99
549		101
553		97
785		101

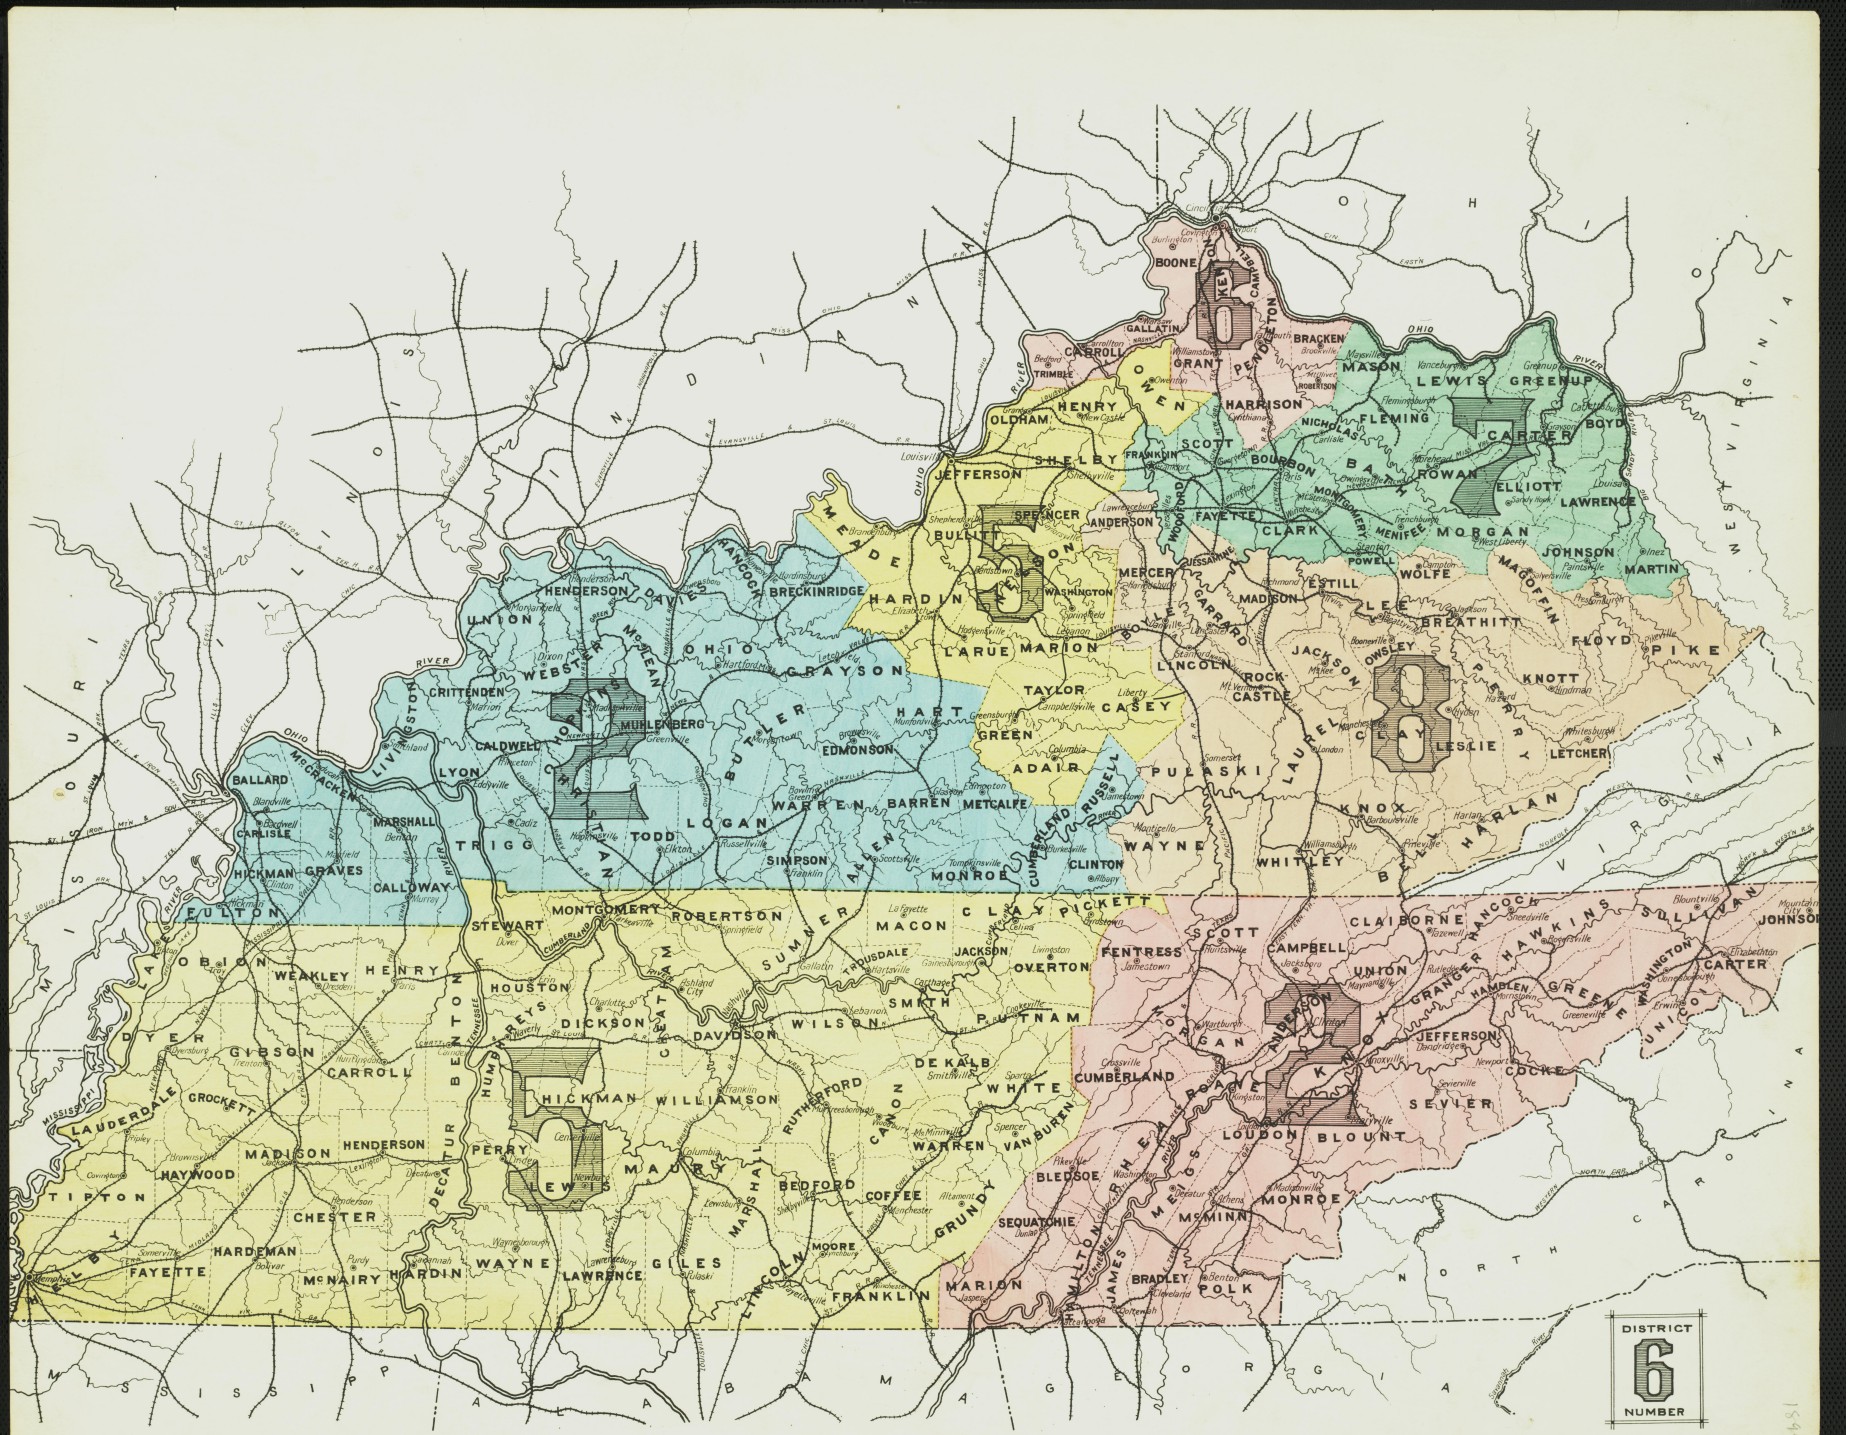
DISTRICT
6
NUMBER

1

KENTUCKY, 2ND DISTRICT

WINSTEAD

ROAD

WINSTEAD DISTILLING CO.,
Registered Distillery №19. 2nd District.
Henderson Co., Ky.

Situated 1 Mile E. of Henderson Court Ho.

CORN CRIB

MASH FLOOR

BARREL SHED

CATTLE SHED

BONDED W. HO. №19.
40' X 120'
CAPACITY 1500 BBLS.
USED FOR STORAGE ONLY.

BONDED W. HO. №19.
40' X 120'
CAPACITY 3300 BBLS.
USED FOR STORAGE ONLY
PAT. RACKS & TIERS

HAY & STRAW HO.

WINSTEAD DISTILLING CO. DISTILLERY.
HAND MADE SOUR MASH WHISKEY. CAPACITY 203 BUSHELS PER DAY.
PRODUCT ABOUT 100 BUS. DAILY. RUN FIVE DAYS PER WEEK.
NO WATCHMAN. MAN LIVES ON PREMISES. NO HEAT. STOVE IN OFFICE.
FUEL COAL & COBS. LIGHTS KEROS. LAMPS. CITY WATER. 100' "T" HOSE
DISTILL. CONSTRUCTED OF BRICK & FRAME, METAL RF. STEAM DOUBLER.
WINSTEAD DISTILLING CO. BONDED W. HO. №19.
CAPACITY 1500 BBLS. NO RACKS.
BONDED W. HO. №19. CAPACITY 3600 BBLS. PATENT RACKS. SIX TIERS.
FREE WARE HO. CAPACITY 400 BBLS. NO HEAT.
BUILDINGS ARE OCCUPIED FOR STORAGE ONLY. FRAME WITH METAL ROOF
NO WATCHMAN NO HEAT. LIGHTS. CANDLES.

L. & N. R. R.

OHIO VALLEY R. R.

VACANT FIELDS

WORSHAM DISTILLING CO.,
Registered Distillery №50. 2nd Dist.- Henderson Co. Ky.

Situated 1½ Miles E. of Henderson Court Ho.

E. W. WORSHAM & CO. BONDED W. HO.

WORSHAM DISTILLING CO.

BONDED W. HO. №50

CAPACITY 3300 BBLS. USED FOR STORAGE ONLY

CISTERN ROOM

CORN CRIB

MASH FLOOR

CATTLE SHED

WORSHAM DISTILLING CO.'S DISTILLERY.
HAND MADE SOUR MASH WHISKEY. CAPACITY 101 BUSHELS PER 24 HOURS.
RUN FULL CAP. ABOUT FIVE MONTHS PER YEAR.
NO WATCHMAN. MAN LIVES ON PREMISES. NO HEAT. STOVE IN OFFICE.
FUEL COAL. CLOSED KEROS. OIL LIGHTS. CITY WATER. 100 OF 1¼" HOSE.
DISTILLERY FRAME CONSTRUCTION, METAL RF. DOUBLER RUN BY STEAM.
WORSHAM DISTILLING CO. BONDED W. HO. №50.
CAPACITY 3300 BBLS. NO RICKING. NO BOTTLING. USED FOR STORAGE ONLY
NO WATCHMAN. NO HEAT. CLOSED KEROS. LIGHTS.
BUILDING FRAME CONSTRUCTION WITH METAL & SHINGLE ROOF.

CANOE CREEK

AT CLEAR SPRINGS
10 Miles N. E. of Mayfield

PADUCAH & BREWER'S MILLS ROAD

HARPER & ALEXANDER BONDED W. HO. №27.

HARPER & ALEXANDER FREE W. HO. №27.
(STORAGE ONLY)

HARPER AND ALEXANDER
Registered Distillery №27. 2nd Dist.- Graves Co. Ky.

HARPER & RILEY BONDED W. HO. №27.

HARPER & ALEXANDER, DISTILLERY.
HAND MADE SOUR MASH WHISKEY. CAPACITY 9194 BUSHELS PER DAY.
RUN ABOUT FOUR MONTHS IN A YEAR.
NO WATCHMAN. FUEL WOOD. NO HEAT. NO LIGHTS. NO FIRE APPARATUS.
BUILDINGS FRAME CONSTRUCTION SHINGLE RF. FIRE UNDER DOUBLER.
FORMERLY RUN BY HARPER & CLARK, HARPER & RILEY AND HARPER & DULANEY.

HARPER & ALEXANDER BONDED W. HO. №27 CAPCY. 320 BBLS.
HARPER & CLARK " " " " " 290 "
HARPER & RILEY " " " " " 290 "
HARPER & ALEXANDER FREE " " " " " 320 "
FRAME BLDGS. SHINGLE RFS. NO LIGHT. NO HEAT
BUILDINGS USED FOR STORAGE ONLY. NO RICKING.

NO EXPOSURE

AT MAYFIELD
2 Miles S. E. of Court Ho.

BONDED WHO. №121.

GRASS CREEK

G. H. W. DULANEY
Registered Distillery №121.
2nd Dist.- Graves Co. Ky.
(FORMERLY DULANEY & MAYS.)

HAND MADE SOUR MASH WHISKEY. CAP. 692 BUS. PER DAY.
RUN ABOUT FIVE MONTHS PER YEAR.
NO WATCHMAN. FUEL WOOD. NO HEAT. NO LIGHTS.
NO FIRE APPS. FIRE UNDER DOUBLER.
FRAME BLDGS. SHINGLE ROOFS.
G. H. W. DULANEY'S BONDED W. HO. №121.
CAPACITY 150 BARRELS. NO HEAT.
NO RICKING. FR. BLG. SHINGLE RF.

CISTERN TANK

DOUBLER ROOM

1 MASHING

1 METAL RF.

Scale of Feet.

50 40 30 20 10 0 50 100 150

VACANT FIELDS

BIGHAM STREET

AT MARION
½ Mile S. of Court Ho.

DYCUSBURGH ROAD

MARION & PRINCETON ROAD

F. E. ROBERTSON 1ST & CO.
Registered Distillery №49 2nd Dist.
Crittenden Co. Ky.

HAND MADE SOUR MASH WHISKEY. CAP. 24.194
BUSHELS PER DAY. RUN 4 MOS. PER YEAR.
NO WATCHMAN. NO HEAT. FUEL COAL & WOOD.
KEROS. LIGHTS. FIRE UNDER DOUBLER. 100 12" HOSE.
FRAME BLDG. METAL & SHINGLE ROOF.

F. E. ROBERTSON 1ST & CO.
BONDED W. HO. №49.
CAP. 300 BBLS. NO HEAT.
KEROS OR CANDLE LIGHTS.

MARION ROLLER MILLS

VACANT SHED

MASH FLOOR

CATTLE PENS

ELK TANK (WOOD)

1894

2

KENTUCKY, 2ND DISTRICT

NO EXPOSURE

JOHN W. M. FIELD
Registered Distillery No 3, 2nd District
Daviess Co., Ky.

HAND MADE SOUR MASH WHISKEY.
CAPACITY 30 BUS. PER DAY. PRODUCTION ABOUT SAME.
RUN ABOUT EIGHT MONTHS PER YEAR.
NO WATCHMAN. HEAT STOVES. FUEL COAL & COBS.
LIGHTS KEROS. LAMPS. 50' 3/4" HOSE.
DISTILLERY FRAME METAL & SHINGLE ROOF.

JOHN. W. M. FIELD, BONDED W. HO. No 3 CAP. 1570 BBLS.
PATENT RACKS SIX TIERS. FR. BLDG. SHINGLE RF.
BONDED W. HO. No 3-A" CAP. 1000 BBLS.
PATENT RACKS NINE TIERS. FR. BLDG. METAL RF.
BONDED W. HO. No 3-B" CAP. 5000 BBLS.
PATENT RACKS, NINE TIERS. FR. BLDG. METAL RF.
FREE W. HO. No 3. CAP. 1900 BBLS.
SIX TIERS. FRAME BLDG. SHINGLE ROOF.
WARE HOUSES OCCUPIED FOR STORAGE ONLY.
NO WATCHMAN. NO HEAT. LIGHTS KEROS. LAMPS.
NO FIRE APPARATUS.

Situated 4 Miles S.E. of Owensboro

FREE W. HO. No 3.
CAP. 1500 BBLS. SIX TIERS
(STORAGE ONLY) 30' X 100'

TO BE REMOVED

BONDED W. HO. No 3
CAP. 1500 BBLS. PAT. RACKS 6 TIERS
(STORAGE ONLY) 28' X 100'

BONDED W. HO. No 3-A"
CAP. 3000 BBLS. PATENT RACKS NINE TIERS.
USED FOR STORAGE ONLY.
45' X 180'
12' TO EAVES

BONDED W. HO. No 3-B"
CAP. 5000 BBLS. PAT. RACKS NINE TIERS
USED FOR STORAGE
50' X 125'
20' TO EAVES

ELEVATED WHISKEY PIPE

SLOP TROUGH

CORN CRIB

1 MALT KILN
2 OFFICE

MASH FLOOR
YEAST RUN STONE
ENG. 75HP
BOILER
WORK SHED
FLUME STAND.
FERMENTING TUBS
MASH FLOOR

OLD WARE HO (DILAPIDATED)
ABOUT 180' TO PK. DIVE

SHEDS
CATTLE
SHEDS
CATTLE

DRIVE

POND

VACANT FIELDS

OHIO RIVER BEYOND

AT KNOTTSVILLE
13½ Miles E. of Owensboro
and 4 Miles N. of Shorts Station

BONDED W. HO. No 133.
CAP. 150 BBLS.
25' X 36'

BOSTON ROAD

ABOUT 300 YARDS

THE LOG CABIN DISTILLING CO.
Registered Distillery No 133. 2nd Dist.- Daviess Co., Ky.

HAND MADE SOUR MASH WHISKEY. CAP. 20 BUSHELS PER DAY.

RUN ABOUT FOUR MONTHS PER YEAR. NO WATCHMAN.
LIGHTS KEROS LANTERNS. FUEL COAL & COBS. STOVE IN OFF.
DISTILLERY FRAME, SHINGLE ROOF. BEING REMODELED.
TO BE IN OPERATION NOV. 1ST 1893.
TO HAVE ONE RUN STONE, DOUBLER RUN BY STEAM &
BOILER & ENG. 15 HP.

LOG CABIN DISTIL'G CO. BONDED W. HO. No 133
CAP. 150 BBLS. NO RICKING. NO LIGHTS. NO HEAT.

POND

AT OWENSBORO
2 Miles N.W. of Court Ho.

THE ROCK SPRING DISTILLING CO.
Registered Distillery No 18, 2nd Dist.- Daviess Co. Ky.

HAND MADE SOUR MASH WHISKEY.- CAP. 1000 BUSHELS
PRODUCE ABOUT 500 BUSHELS PER DAY.

OPERATED ABOUT SIX MONTHS PER YEAR - DISTILLERY OF FRAME-SHINGLE ROOF
NIGHT WATCHMAN & CLOCK - 8 STATIONS. NO HEAT. FUEL COAL & CORE.
LIGHTS CLOSED KEROS. WATER SUPPLY FROM WELLS. 125' OF 1¼ HOSE.

ROCK SPRING DISTILLING CO.
BONDED WARE HO. No 19.
FRAME BLDGS IRONCLAD - NIGHT WATCHMAN & CLOCK
PARTLY STEAM HEATED - CLOSED KEROSENE LIGHTS
NO FIRE APPLIANCES
WARE HOUSES USED FOR STORAGE PURPOSES ONLY.

TOP OF BANK

SMOKY

FUEL
ENGINE 18 HP
MASH FLOOR 2ND
CRUSHERS
GRANARY

FERMENTING TUBS 1-2

OFFICE

RIVER ROAD

ELEV.

WHISKEY PIPE
STEAM PIPE

SLOP TROUGH

IRON CLAD BLDG

(OLD) STORAGE

SCALES

OFFICE

SHED

CATTLE SHEDS

IRON CLAD

CISTERN ROOM

TURBINE ENGS.

COMMERCIAL SHED

75' X 146'

ROCK SPRING DISTIL'G CO. BONDED W. HO. No 18.
CAP. 1300 BBLS. NO RACKS. NOT HEATED.
(STORAGE ONLY) IRON CLAD
48' X 150'.

ROCK SPRING DISTIL'G CO. BONDED W. HO. No 18.
CAP. 5800 BBLS PATENT RACKS. NINE TIERS.
STEAM HEAT
(STORAGE ONLY)
50' X 150' IRON CLAD

BON HARBOR DISTIL'G CO.
BONDED W. HO. No 18.
CAP. 3800 BBLS. NINE TIERS.
STEAM HEAT.
(STORAGE ONLY)

ROCK SPRING DISTILLING CO
BONDED W. HO. No 18.
CAP. 10000 BBLS. PAT. RACKS NINE TIERS.
BRICK TR. FRAME IN CO. ABOVE 1ST
STEAM HEAT.
(STORAGE ONLY)

ROCK SPRING DISTIL'G CO.
FREE W. HO. No 18.
CAP. 1500 BBLS. PAT. RACKS
NO HEAT.
(STORAGE ONLY)

FREE W. HO.
CAP. 450 BBLS.
28' X 84'
IRON CLAD
NO HEAT.
(STORAGE ONLY)

Scale of Feet.
50 40 30 20 10 0 50 100 150

NO EXPOSURE

KENTUCKY - 2D DISTRICT.

1894

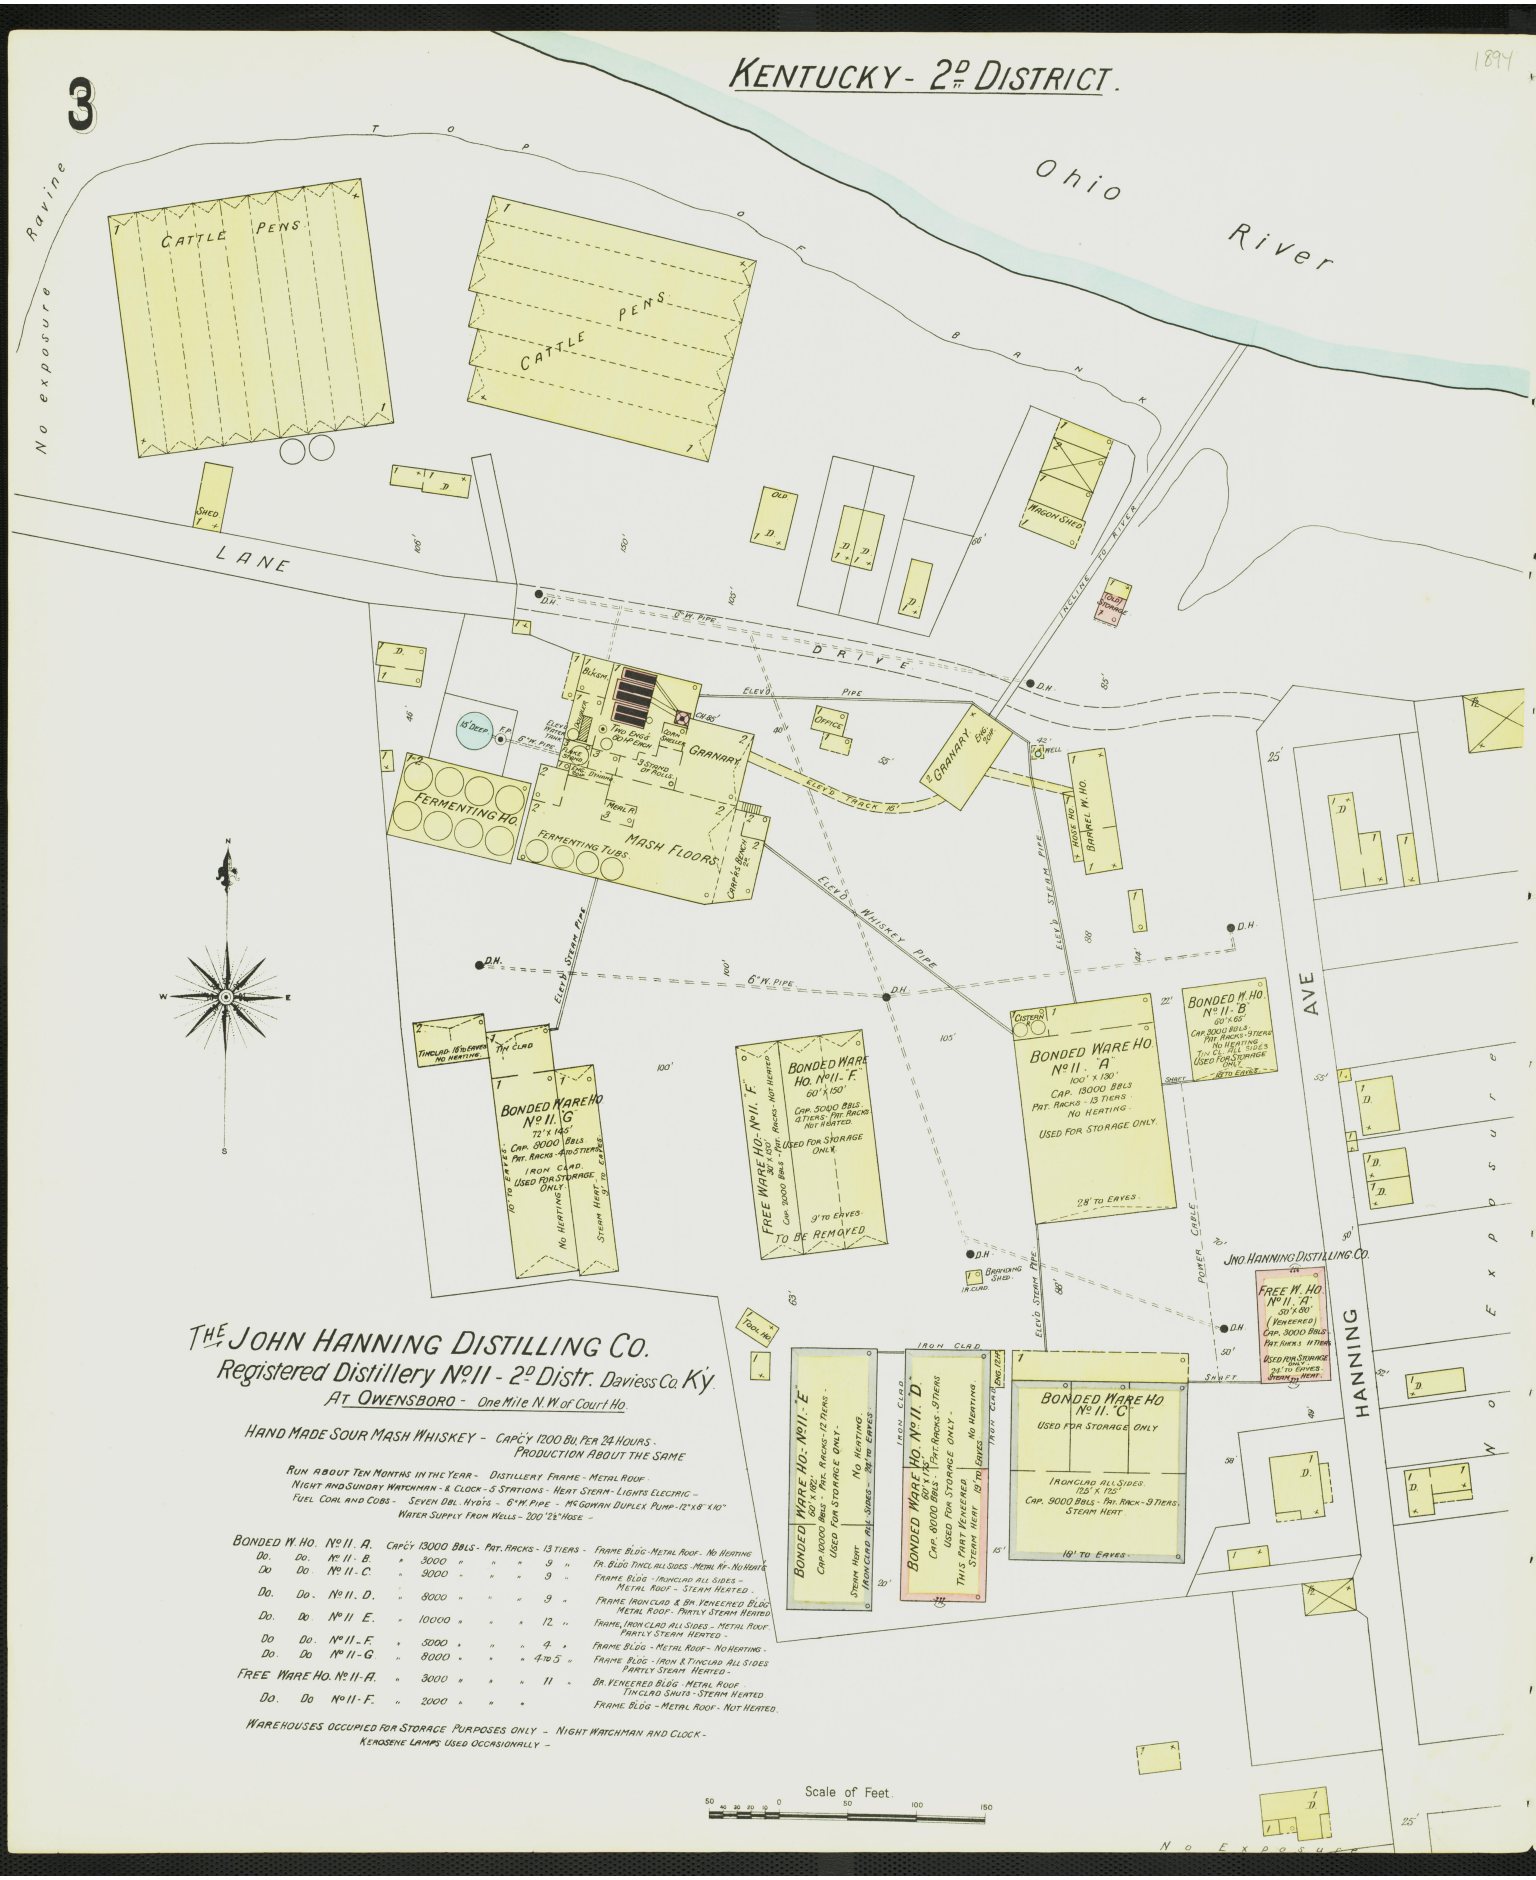

THE JOHN HANNING DISTILLING CO.

Registered Distillery Nº 11 - 2D Distr. Daviess Co. Ky.

AT OWENSBORO - One Mile N.W. of Court Ho.

HAND MADE SOUR MASH WHISKEY - CAP'CY 1200 BU. PER 24 HOURS.
PRODUCTION ABOUT THE SAME

RUN ABOUT TEN MONTHS IN THE YEAR - DISTILLERY FRAME - METAL ROOF
NIGHT AND SUNDAY WATCHMAN - 8 CLOCK - 5 STATIONS - HEAT STEAM - LIGHTS ELECTRIC -
FUEL COAL AND COBS - SEVEN OBL. HYDS - 6" M. PIPE - MCGOWAN DUPLEX PUMP - 12" X 8" X 10"
WATER SUPPLY FROM WELLS - 200' 2½" HOSE -

BONDED W. HO.	Nº 11. A.	CAP'CY 13000 BBLS	PAT. RACKS	13 TIERS	FRAME BLDG - METAL ROOF - NO HEATING
Do.	Do.	Nº 11. B.	" 3000 "	" "	9 "	FR. BLDG TINCL. ALL SIDES - METAL RF - NO HEATS
Do	Do	Nº 11. C.	" 9000 "	" "	9 "	FRAME BLDG - IRONCLAD ALL SIDES - METAL ROOF - STEAM HEATED -
Do.	Do.	Nº 11. D.	" 8000 "	" "	9 "	FRAME IRON CLAD & BR. VENEERED BLDG METAL ROOF - PARTLY STEAM HEATED
Do.	Do.	Nº 11 E.	" 10000 "	" "	12 "	FRAME, IRON CLAD ALL SIDES - METAL ROOF - PARTLY STEAM HEATED -
Do	Do.	Nº 11 - F.	" 5000 "	" "	4 "	FRAME BLDG - METAL ROOF - NO HEATING -
Do.	Do	Nº 11 - G.	" 8000 "	" "	4 TO 5 "	FRAME BLDG - IRON & TINCLAD ALL SIDES PARTLY STEAM HEATED -
FREE WARE HO.	Nº 11 - A.	" 3000 "	" "	11 "	BR. VENEERED BLDG - METAL ROOF - TIN CLAD SHUTS - STEAM HEATED
Do.	Do	Nº 11 - F.	" 2000 "	" "	"	FRAME BLDG - METAL ROOF - NOT HEATED.

WAREHOUSES OCCUPIED FOR STORAGE PURPOSES ONLY - NIGHT WATCHMAN AND CLOCK -
KEROSENE LAMPS USED OCCASIONALLY -

Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY 2ND DISTRICT

4

1894

VACANT FIELDS

R.J. MEYLERS BONDED WARE HO. No 4-C.
CAP. 6000 BBLS - PATENT RACKS - NINE TIERS
NO HEATG - USED FOR STORAGE ONLY -
WINDOWS ALL SIDES
12" x 24" - 27 TO EAVES

Situated 5 Miles S.W. of
BOWLING GREEN
and 1½ Mile W. of Memphis Junction, L & N. R.R.

CATTLE SHEDS

DRIVE

R.J. MEYLERS FREE WARE HO. No 4-A.
CAP. 2000 BBLS -
PATENT RACKS - SIX TIERS -
USED FOR STORAGE ONLY -
NO HEATG -
WINDOWS ALL SIDES
12" x 24" - 15 TO EAVES

VACANT FIELDS

SLOP TROUGH

R.J. MEYLERS SPRING WATER DISTILLERY

Registered Distillery No 4. - 2nd Dist. - Warren Co. Ky.

HAND MADE SOUR MASH WHISKEY - CAP. 185 BUSHELS PER DAY -
RUN FULL CAPACITY ABOUT SIX MONTHS OF YEAR

DISTILLERY FRAME - METAL & SHINGLE ROOF
NIGHT WATCHMAN - WHEN RUNNING - NO CLOCK
EMPLOYEES LIVE ON PREMISES -
NO HEATG - LIGHTS KEROSENE LANTERNS
FUEL COAL & COBS
100' ¼" HOSE - WATER SUPPLY FROM SPRING

R.J. MEYLERS FREE WARE HO. No 4-A.
CAP. 2000 BBLS - PATENT RACKS - 6 TIERS - BRICK BUILDING -
METAL ROOF - CLOSED KEROSENE LIGHTS - NO HEATG

BONDED WARE HO. No 4-B.
CAP. 2000 BBLS - PATENT RACKS - FIVE TIERS - BRICK BUILDING -
METAL ROOF - CLOSED KEROSENE LIGHTS - HEAT STEAM -

BONDED WARE HO. No 4-C.
CAP. 6000 BBLS - PATENT RACKS - NINE TIERS - BRICK BUILDING -
METAL ROOF - CLOSED KEROSENE LIGHTS - NO HEATG -

WARE HOUSES USED FOR STORAGE ONLY -

3" W. PIPE
3" PIPE
100'
190' TO FRAME DWELLING
WORK HOUSE
3 ENGS 50 HP
WATER TANK
ENGINE
BOILER
CHIMNEY
MASH TUBS
FLOOMS
FERMENTING TUBS
FERMENTING TUBS
DRIVE
SLOP TROUGH & STEAM PIPE
CORN CRIB
SCALES
D
OFF
45
89
86
75
180
CISTERN
R.J. MEYLERS
BONDED WARE HO. No 4-B.
CAP. 2000 BBLS - PATENT RACKS -
FIVE TIERS - STEAM HEAT -
USED FOR STORAGE ONLY
WINDOWS ALL SIDES
60" x 100" - 13 TO EAVES
25 ft. Lock
VACANT

Scale of Feet.
50 40 30 20 10 0 50 100 150

VACANT FIELDS

JOS. SCHNEIDERS DOUBLE SPRING DISTILLERY

Registered Distillery No 52 - 2nd Dist. Warren Co. Ky. (Brandy - No 504)

HAND MADE SOUR MASH WHISKY - CAP. 20 BUSHELS PER DAY -
OPERATED ABOUT THREE MONTHS OF YEAR
FRAME STILL HOUSE - SHINGLE ROOF - NO WATCHMAN
EMPLOYEES LIVES ON PREMISES - NO HEAT - FUEL COAL & WOOD
KEROSENE LIGHTS - 50' 1" HOSE -

JOS. SCHNEIDERS BONDED WARE HO.
CAP. 40 BBLS - NO RICKING - NO HEATG -

HAY HO.
80'
D
Situated 1⅛ Miles N.E. of
Bowling Green Court Ho.
JOS. SCHNEIDERS BONDED WARE HO. CAP. 40 BBLS -
FERMENTING & MASH TUBS
FERMENTING
WATER TANK
COAL
DRIVE
60
48
81'
GRO & SOT
SCALES
HAY HO.
VACANT FIELDS
BARREN RIVER PIKE

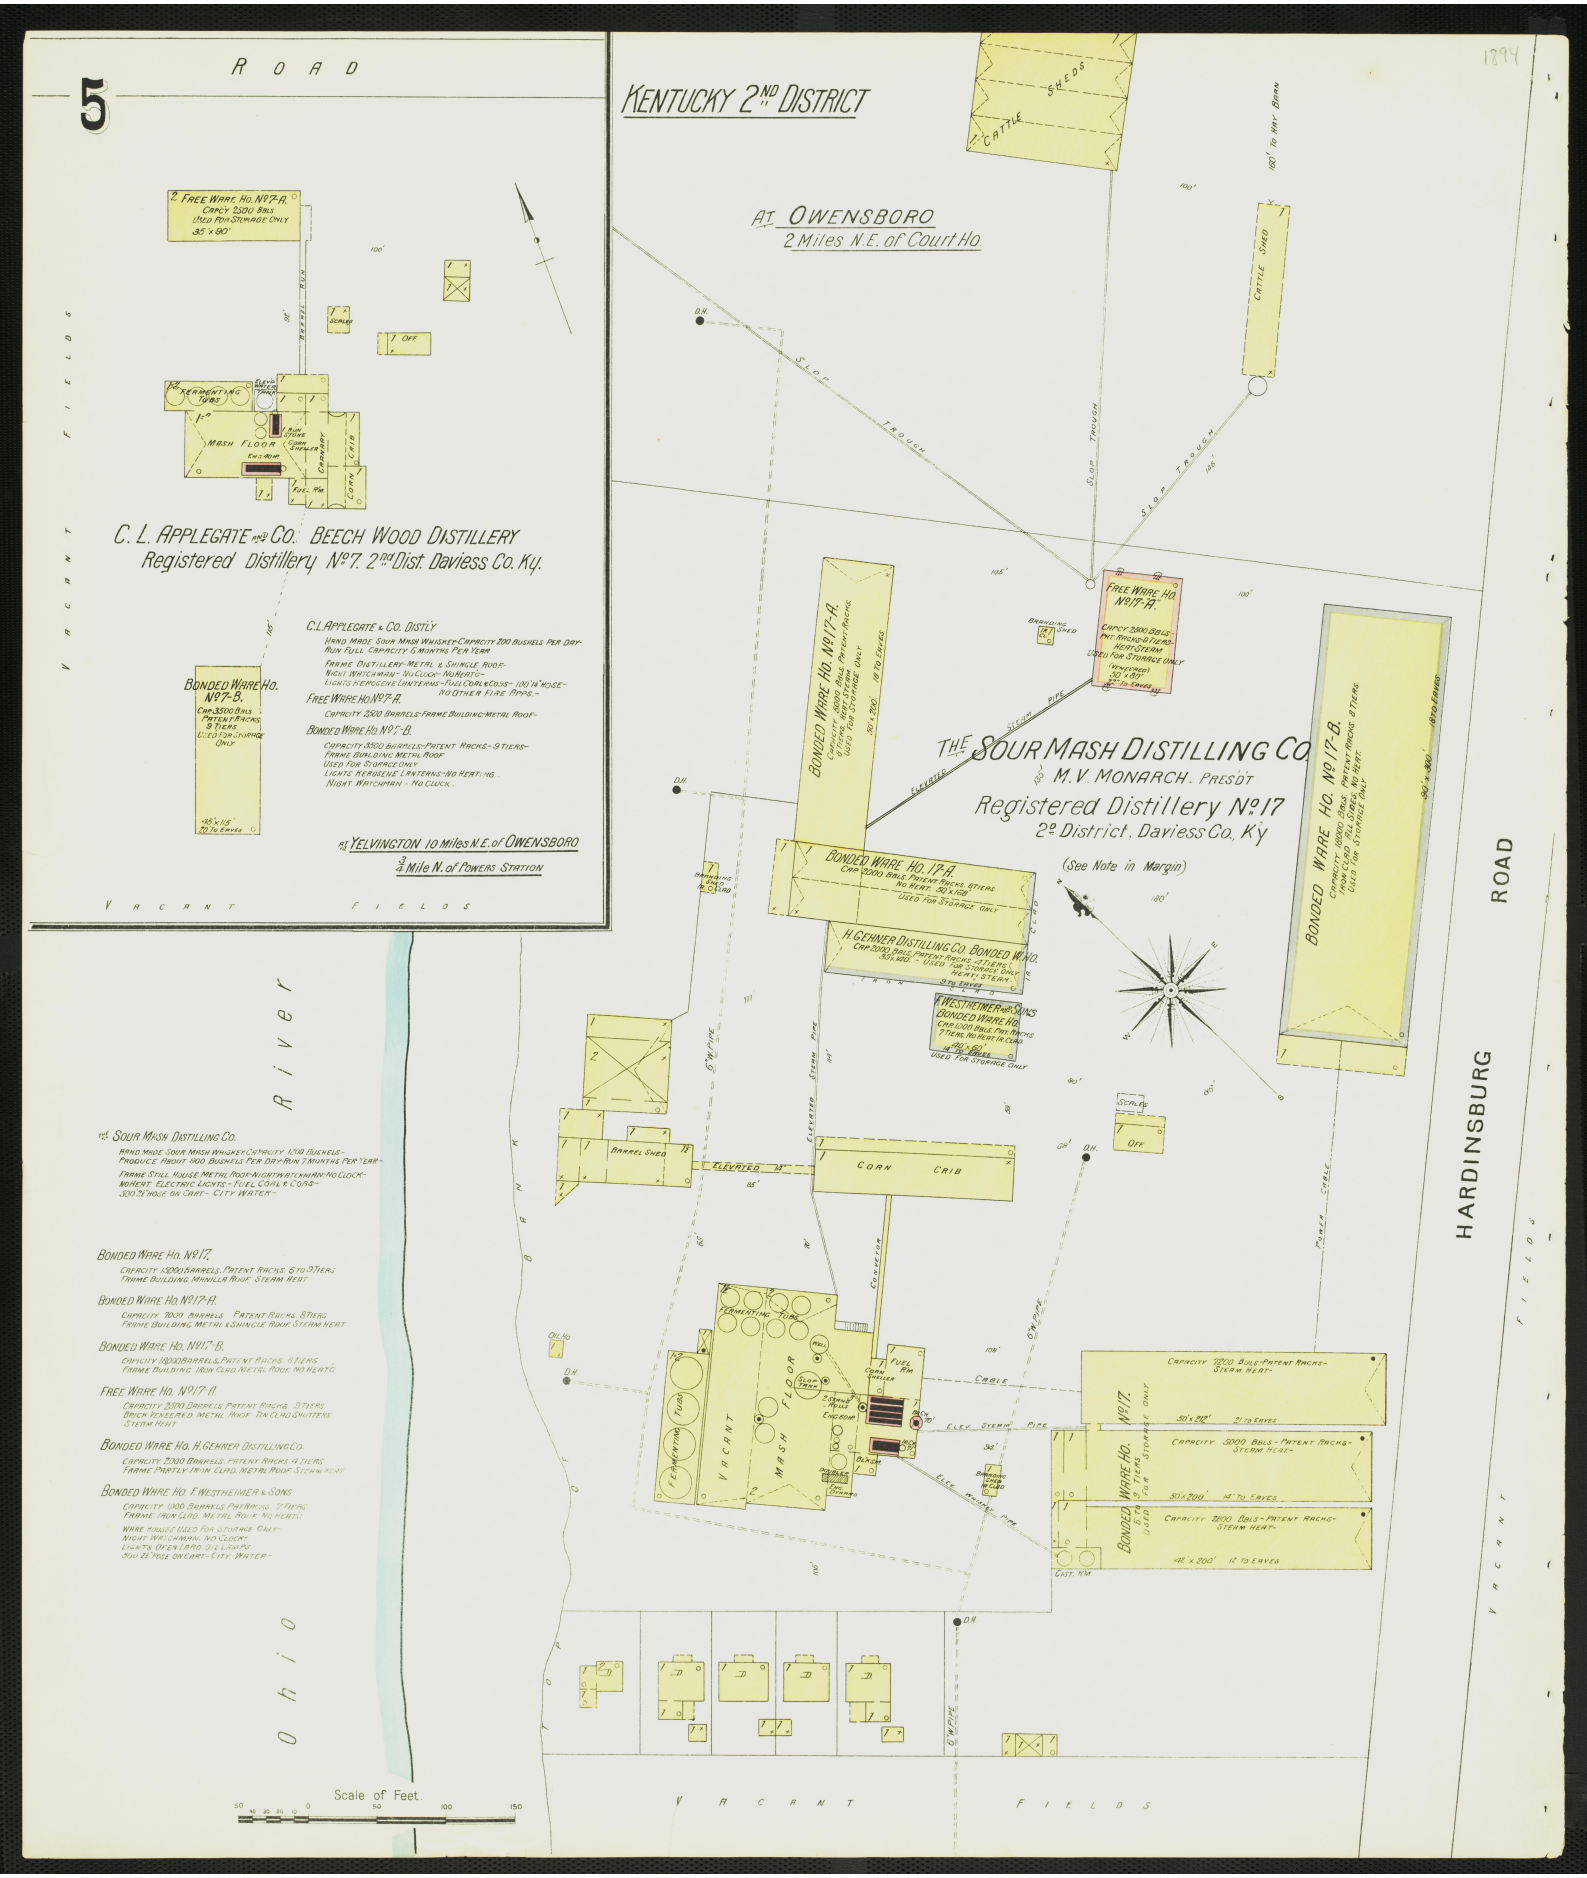
ROAD
KENTUCKY 2ND DISTRICT
AT OWENSBORO
2 Miles N.E. of Court Ho.
1894
SHEDS
CATTLE
CATTLE SHED
100' TO HAY BARN
SLOP TROUGH
2. FREE WARE HO. No 17-A.
CAPCY 2500 BBLS
USED FOR STORAGE ONLY
35' x 90'
FERMENTING TUBS
MASH FLOOR
RUN STONE
CORN CRUSHER
CONVEY
CORN CRIB
FUEL RM
C. L. APPLEGATE AND CO. BEECH WOOD DISTILLERY
Registered Distillery No. 7. 2nd Dist. Daviess Co. Ky.
C.L. APPLEGATE & CO. DISTL'Y
HAND MADE SOUR MASH WHISKEY-CAPACITY 200 BUSHELS PER DAY-
RUN FULL CAPACITY 6 MONTHS PER YEAR
FRAME DISTILLERY-METAL & SHINGLE ROOF-
NIGHT WATCHMAN- NO CLOCK- NO HEATS-
LIGHTS KEROSENE LANTERNS-FULL CORE & COSE- 100 1/4" HOSE-
NO OTHER FIRE APPS-
FREE WARE HO No 7-A.
CAPACITY 2500 BARRELS-FRAME BUILDING-METAL ROOF-
BONDED WARE HO No 7-B.
CAPACITY 3500 BARRELS-PATENT RACKS-9 TIERS-
FRAME BUILDING METAL ROOF
USED FOR STORAGE ONLY
LIGHTS KEROSENE LANTERNS-NO HEATING
NIGHT WATCHMAN - NO CLOCK.
BONDED WARE HO. No 7-B.
CAP. 3500 BBLS
PATENT RACKS
9 TIERS
USED FOR STORAGE ONLY
48' X 115'
20 TO EAVES
At YELVINGTON 10 Miles N.E. of OWENSBORO
3/4 Mile N. of POWERS STATION
VACANT FIELDS
BONDED WARE HO. No 17-A.
CAPCY 3000 BBLS PATENT RACKS
STEAM HEAT-STEAM
USED FOR STORAGE ONLY
50' x 180'
18' TO EAVES
FREE WARE HO. No 17-A.
CAPCY 2500 BBLS
PAT. RACKS-9 TIERS
HEAT-STEAM
USED FOR STORAGE ONLY
"PENDING"
50' x 80'
18' to Eaves
BRANDING SHED
STEAM PIPE
ELEVATOR
THE SOUR MASH DISTILLING CO
M.V. MONARCH. PRES'DT
Registered Distillery No. 17
2d District, Daviess Co., Ky
(See Note in Margin)
BONDED WARE HO. No 17-B.
CAPACITY 10000 BBLS PATENT RACKS 8 TIERS
ALL STEEL NO HEAT
USED FOR STORAGE ONLY
50' x 200'
BONDED WARE HO. No 17-A.
CAP. 2000 BBLS PATENT RACKS 8 TIERS
No HEAT 30' x 100'
USED FOR STORAGE ONLY
H. GEHNER DISTILLING CO. BONDED W'HO.
CAP. 2000 BBLS PATENT RACKS 4 TIERS
50' x 120' USED FOR STORAGE ONLY
HEAT-STEAM
9 TO EAVES
F. WESTHEIMER AND SONS
BONDED WARE HO.
CAP. 1000 BBLS PAT RACKS
7 TIERS. NO HEAT IN CLAD
40' x 90'
14' TO EAVES
USED FOR STORAGE ONLY
SCALE
OFF
BARREL SHED
ELEVATED
CORN CRIB
CONVEYOR
TABLE
STABLE
CABLE
ELEV. STEAM PIPE
ELEV. WATER PIPE
CAST. N'M
CAPACITY 7200 BBLS-PATENT RACKS-STEAM HEAT-
50' x 216' 21' TO EAVES
CAPACITY 5000 BBLS-PATENT RACKS-STEAM HEAT-
50' x 200' 14' TO EAVES
CAPACITY 2200 BBLS-PATENT RACKS-STEAM HEAT-
42' x 200' 12' TO EAVES
BONDED WARE HO. No 17.
5 TIERS
USED FOR STORAGE ONLY
FERMENTING TUBS
VACANT
MASH FLOOR
SLOW TANK
ENG. ROOM
BOILER
ENG. & BOILERS
POULTRY HOUSES
BARRELING HOUSE
NO CLAD
COMPANY
HARDINSBURG ROAD
VACANT FIELDS
Ohio River
THE SOUR MASH DISTILLING CO.
HAND MADE SOUR MASH WHISKEY-CAPACITY 1200 BUSHELS-
PRODUCE ABOUT 900 BUSHELS PER DAY-RUN 7 MONTHS PER YEAR-
FRAME STILL HOUSE, METAL ROOF-NIGHT WATCHMAN-NO CLOCK-
NO HEAT ELECTRIC LIGHTS-FUEL COAL & COKE-
300 ft HOSE ON CART- CITY WATER-
BONDED WARE HO. No 17.
CAPACITY 15000 BARRELS, PATENT RACKS, 8 TO 9 TIERS
FRAME BUILDING, MANILLA ROOF, STEAM HEAT.
BONDED WARE HO. No 17-A.
CAPACITY 7000 BARRELS PATENT RACKS, 8 TIERS
FRAME BUILDING, METAL & SHINGLE ROOF, STEAM HEAT.
BONDED WARE HO. No 17-B.
CAPACITY 10000 BARRELS, PATENT RACKS, 8 TIERS
FRAME BUILDING, IRON CLAD, METAL ROOF, NO HEAT'G.
FREE WARE HO. No 17-A.
CAPACITY 2500 BARRELS, PATENT RACKS, 8 TIERS
BRICK VENEERED, METAL ROOF, TIN CLAD, SHUTTERS
STEAM HEAT.
BONDED WARE HO. H. GEHNER DISTILLING CO.
CAPACITY 2000 BARRELS, PATENT RACKS, 4 TIERS
FRAME PARTLY IRON CLAD, METAL ROOF, STEAM HEAT.
BONDED WARE HO. F. WESTHEIMER & SONS
CAPACITY 1000 BARRELS, PAT RACKS, 7 TIERS
FRAME, IRON CLAD, METAL ROOF, NO HEATS
WARE HOUSES USED FOR STORAGE ONLY
NIGHT WATCHMAN, NO CLOCK.
LIGHTS, OIL & LAMPS.
300 ft HOSE ON CART- CITY WATER-
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY 2ND DISTRICT.

DAVIESS COUNTY DISTILLING CO.
Registered Distillery No 2. 2nd Distr, Daviess Co. Ky.

HAND MADE SOUR MASH WHISKEY
Cap 1823 Bbl. Present Production About 400 Bbl Per Day
Run About Six Mos Of Year
Frame Still Ho. Metal & Shingle Roof.

Night Watchman. Clock & Six Stations
Steam Heat. Closed Kerosene Lights. Fire Coal & Cobs.
12 Small Chemical Fire Extgs Distributed Throughout
Distillery & Ware Hos.

ROAD TO ROCK SPRING DISTILLING CO. ½ MILE DISTANT

CATTLE PENS.

GRANARY

MASH FLOORS

FERMENTING ROOM.

FIRE ROOM.

ENGINE 150 H.P.

BOILER

BRICK CH.

IRON CLAD

CORN SHELLER

ROLLER MILL

STEEL TANK

STOP TROUGH

DRIVE FENCE

BARREL HO.

BRANDING PLATFORM

OFF.

SCALE HO.

CISTERN

DAVIESS COUNTY DISTILLING CO'S.
BONDED WARE HO. No 2-A.
82'x180'-28' To Eaves.
Capacity 15300 Bbls.
Patent Racks-8 Tiers.
Used For Storage Only.
Heat: Steam.

DAVIESS CO. DISTILLING CO'S.
FREE WARE HO. No 2-D.
Cap 4250 Bbls.
Patent Racks-11 Tiers.
Used For Storage Only.
Heat: Steam.
60'x72'
28' To Eaves

R. MONARCH'S
BONDED WARE HO. No 2-B.
100'x135'-28' To Eaves.
Capacity 12000 Bbls.
Patent Racks-12 Tiers.
Used For Storage Only.
Heat: Steam.

DAVIESS CO. DISTILLING CO. BONDED WARE HO. A.
Capacity 15300 Bbls. Patent Racks. 8 Tiers.
Bldg Constructed Of Brick, Metal Roof. Tin Clad.
Shafts All Sizes Running South Sides Of Ware House
Frame & Glass 7' Below Eaves. East Gable Fireproof Tin Clad

R. MONARCHS BONDED WARE HO. B.
Capacity 1200 Bbls. Patent Racks. 12 Tiers.
Frame Building, Metal Roof.

DAVIESS CO. DISTILLING CO. FREE WARE HO. D.
Capacity 4250 Bbls. Patent Racks. 11 Tiers.
Frame Building. Slate Roof.

Ware Houses Occupied For Storage Only.
Night Watchman. Clock. Steam Heat.
Closed Kerosene Lights.

HAY BARN

VACANT FIELDS

ABOUT 75' TO OHIO RIVER.

TOP OF BANK

AT OWENSBORO.
1¼ Mile N.W. of Court Ho.

Situated 5 Miles N.W. Of Owensboro.

M. P. MATTINGLY'S OLD W. S. STONE DISTILLERY
Registered Distillery No 13- 2nd District Daviess Co. Ky.

HAND MADE SOUR MASH WHISKEY
Capacity 300 Bushels. Production About Same.
Run Seven Months Of Year.
Frame Still House. Metal & Shingle Roof.

Night Watchman & Clock. Six Stations
Heat. Stove In Office & Yeast. No Lights Exc.
100' Deep Water's Supply From Driven Wells.

M. P. MATTINGLY'S BONDED WARE HOUSE No 1.
Frame Bldgs. Metal & Shingle Roof. No Lights. No Heat. Occupied For Storage Purposes Only.

BONDED WARE HO. Cap 1800 Bbls. 81'x103' 3 Ricks. 8' To Eaves
BONDED WARE HO. Cap 1800 Bbls. 81'x103' 3 Ricks. 8' To Eaves
BONDED WARE HO. Cap 1500 Bbls. 71'x103' 3 Ricks. 8' To Eaves
BONDED WARE HO. 24' To Eaves. 85'x106' Cap 6000 Bbls. Patent Racks. Nine Tiers. 7' To Eaves.
"THREE RICK HO." BONDED WARE HO. Cap 1200 Bbls. 82'x52'. Cap 1260 Bbls. 82'x52'.
FREE WARE HO. Cap 1500 Bbls.
TOBACCO SHED
SLOP TUB
SWITCH
WELL & PUMP
25' 1" HOUSE
CIST. FIL.
ELE. WHISKEY PIPE
GAS MACH. UNDERGROUND
MASH FLOOR 2ND
GRANARY
CORN SHELLER
FUEL HO.
ENGINE
BOILER
BRANDING PLATFORM
STEAM'G MILLS
OLD SHED
OLD CRIB To Be Removed
CORN CRIB
SCALES
OFF.
OLD PUMPING
MILL
RIVER ROAD
HOG YARD
VACANT FIELDS BEYOND

Scale of Feet.
50 40 30 20 10 0 50 100 150

7

KENTUCKY 2D DISTRICT

1894

Situated on Ohio River
¾ Mile S.W. of UNION TOWN. P.O.

THE MUTUAL DISTILLING CO. HENRY WILKIN SEC'Y

Registered Distillery No 6 - 2D Distr. union Co. Ky.

PRODUCTION COLOGNE SPIRITS - CAPCY. 2500 BUSHELS PER DAY -
RUN NIGHT & DAY ALL YEAR -

DISTILLERY CONSTRUCTED OF BRICK & FRAME - COAR IRON CLAD -
METAL & COMPOSITION ROOF - 3 NIGHT WATCHMAN - ELECTRIC CLOCK IN OFFICE -
INCANDESCENT ELECTRIC LIGHTS & SIGNAL OIL LANTERNS
HOUSE MAIN CARRIES BEAR CLOCH - STEAM HEAT - FUEL COAL & COBS -
WATER SUPPLY FROM OHIO RIVER & WELLS
SIX COOK DEEP WELL PUMPS - TWO LAIDLAW DUNN-GORDON DEEP WELL PUMPS (16X10X18)
10 SUPPLY FROM RIVER - 8" DISCHARGE -
FIVE 2" PIPES IN MASH & FERMENTING ROOMS SUPPLIED BY 2 TANKS OF 9000 & 15000 CAL CAP -
¾ PIPE IN MILL RM & STILL HO. SUPPLIED BY 2 TANKS
CAP-5000 & 6000 GAL.
DIRECT PRESSURE ON ¾ PD. IN BOILER RM -
250 H.P. HOUSE DISTRIBUTED IN BUILDING -
300 2" HOSE ON CRAT -

MUTUAL DISTILLING CO. BONDED WARE No. No 6.
CAP 14,150 BBLS. - PATENT RACKS - 12 TIERS -
GLUE RM IN S.W. CORNER OF BUILDING - SEE DIAGRAM -
BUILDING CONSTRUCTION CORR IRON ON STUDDING - METAL RF
NIGHT WATCHMAN & CLOCK - NO HEATING -
INCANDESCENT ELECTRIC LIGHTS & CANDLES

MUTUAL DISTILLING CO.

Being Built -

Registered Distillery No 6. - Being Built -

PRODUCTION H COLOGNE SPIRITS - TO HAVE MASHING CAP. 5000 BUSHELS PER DAY -
TO RUN NIGHT & DAY -

DISTILLERY CONSTRUCTED OF BRICK - GRAVEL ROOF -
ONE NIGHT WATCHMAN AT PRESENT -
TO HAVE 3 WATCHMEN & CLOCK - STEAM HEAT - FUEL COAL
LIGHTS INCANDESCENT ELECTRIC & SIGNAL OIL LANTERNS
TO HAVE ¾ PIPE & ¾ HOSE ATTACHED EACH FLOOR -
ON 4TH FLOR IN FERMENTING ROOMS -
¾ PIPE CONNECTED WITH LARGE ELEVATED TANKS
SUPPLIED BY 8" MAIN FROM RIVER

BONDED WARE HO. No 6.

SEE ABOVE

Scale of Feet.

1894

KENTUCKY - 2D DISTRICT

1894

8

VACANT

VACANT FIELDS

LOUISVILLE - ST. LOUIS & TEXAS R.R.

LAKETOWN OR RIVER ROAD

OHIO RIVER BEYOND

NO EXPOSURE

Situated on Ohio River
At GRISSOM'S LANDING
10 Miles N.W. of Owensboro

EAGLE DISTILLERY CO.
BONDED WARE No 8-A
USED FOR STORAGE ONLY

Cap. 13300 Bbls
Pat. Racks-18 Tiers
Steam Heat

ELEV'D STEAM PIPE

CH. DIA. 23'
8th RP.

538'

118'

30' to Eaves

CISTERN

THE EAGLE DISTILLERY CO.
Registered Distillery No 8 - 2d District
Daviess Co. Ky

HAND MADE SOUR MASH WHISKEY - CAPCY 500 BUS. PER DAY.
PRESENT PRODUCTION 300 BUS. PER DAY - RUN FOUR MONTHS IN THE YEAR
DISTILLERY CONSTRUCTED OF BRICK WITH SLATE ROOF -
NIGHT WATCHMAN AND CLOCK - TWO STATIONS - LIGHTS KEROSENE; OPEN LAMPS -
FUEL COAL AND COBS - NO HEATING - FIRE PUMP - 125' 1½" HOSE -

EAGLE DISTILLERY CO'S WARE HOUSES.

BONDED W. HO - No 8 - Capcy 6120 Bbls - Patent Racks - 5 Tiers
Frame Bldg - Shingle Roof - No Heating
Do. Do. No 8-A. Capcy 13300 Bbls - Pat. Racks - 18 Tiers -
Frame Bldg - Shingle Roof - Heat Steam -
FREE W. HO. No 1. Capcy 600 Bbls - Pat. Racks - 3 Tiers
Frame Bldg - Shingle Roof - No Heating
Do. Do No 2. Capcy 1100 Bbls - Pat. Racks - 5 Tiers -
Frame Bldg - Shingle Roof - No Heat.

WARE HOUSES USED FOR STORAGE ONLY -
NIGHT WATCHMAN AND CLOCK - NO FIRE APPLIANCES.
LIGHTS OPEN KEROSENE LAMPS AND CANDLES -

ELEV'D WHISKEY PIPE

CATTLE SHED

46'

VEH. SHED

SLOP TROUGH

110'

INCLINE 300' LONG TO RIVER

FREE WARE HO. No 1
24'x 100'
Capcy 600 Bbls - Pat. Racks
3 Tiers
(STORAGE ONLY)
NO HEATING

32'

CORN CRIB
25' TO EAVES

COAL HO.
24' TO EAVES

DIST. 1750

TRAMWAY ELEV'D 20'

COBS CONVEYOR

134'

CHIM. 40'

WELL

STILLS

ENG. ROOM 18'x 30'
STEAM HEAT

½ CONCRETE

BOILERS

MASH RM

COOLERS

FERMENTING TUBS

12' TO EAVES
CEMENT FLOOR

POND

115'

43'

ELEV'D WHISKEY PIPE

FREE WARE HO. No 2
Capcy 1100 Bbls
Pat. Racks - Steam
No Heat
(STORAGE ONLY)
42'x 81'
10' to Eaves

SHED

BONDED WARE HO. No 8.
Capcy 6120 Bbls - Pat. Racks - 5 Tiers
No Heating -
Used for Storage Only
80'x 174' - 13' to Eaves -

CISTERN

46'

64'

113'

CARRIAGE HO.

OFFICE

DETACHED FR. DWGS BEYOND.

NO EXPOSURE

Scale of Feet.
50 40 30 20 10 0 50 100 150

CH. 115'

FLAKE STOVE

DOUBLER

FERMENTING TUBS
2 TANK

ENG. ROOM

MASH FLOOR

COOLER

CORN CRIB

THIS BLDG BEING ERECTED -
DIAGRAM TAKEN FROM ARCHITECTS PLANS

J. W. McCULLOGH'S DISTILLERY
Registered No -2d Distr. Daviess Co. Ky.
(NOT YET NUMBERED)
HAND MADE SOUR MASH WHISKEY.
CAPCY 200 BUS. PER DAY - PRODUCTION ABOUT 125 BUS.
TO HAVE NIGHT WATCHMAN AND CLOCK - NO HEATING
CLOSED KEROSENE LIGHTS - 50' 1½" HOSE -

BONDED WARE HO.
CAP. 2200 BBLS
PAT. RACKS
3 TIERS
45' X 175'
8' TO EAVES

THIS BLDG PROPOSED & LOCATED AS SHOWN

AT OWENSBORO.
1½ Mile N.W. of Court House

MEDCALF AND BRAY
Registered Distillery No 144 - 2d Distr.
Daviess Co. Ky.
HAND MADE SOUR MASH WHISKEY - CAPCY 20 BUS PER DAY.
RUN 3 MONTHS IN THE YEAR -
DISTILLERY FRAME - SHINGLE ROOF - DOUBLER RUN BY STEAM -
NO WATCHMAN - NO LIGHTS - STOVE IN OFFICE - FUEL COAL & WOOD -
60' 1½" HOSE

POND

HAY & TOBACCO BARN

F.P. RUN STONES END STUMP

COMM'T

WATER TANK

FLAKE

CISTERN

SLOP TROUGH

SLOP TANK

110'

MEDCALF & BRAY'S BONDED WARE HO - No 144.
CAPCY 275 BBLS - NO RICKING
G. W. MEDCALF & CO. BONDED W. HO. No 144.
CAPCY 200 BBLS - NO RICKING -
FRAME BLDGS, SHINGLE ROOF -
NO WATCHMAN - NO LIGHTS - NO HEATING.
BUILDINGS USED FOR STORAGE ONLY.

17 Miles S.E. of OWENSBORO
and 2 Miles S.E. of WHITESVILLE

USED FOR STORAGE ONLY

G. W. MEDCALF & CO
BONDED W. HO
No 144

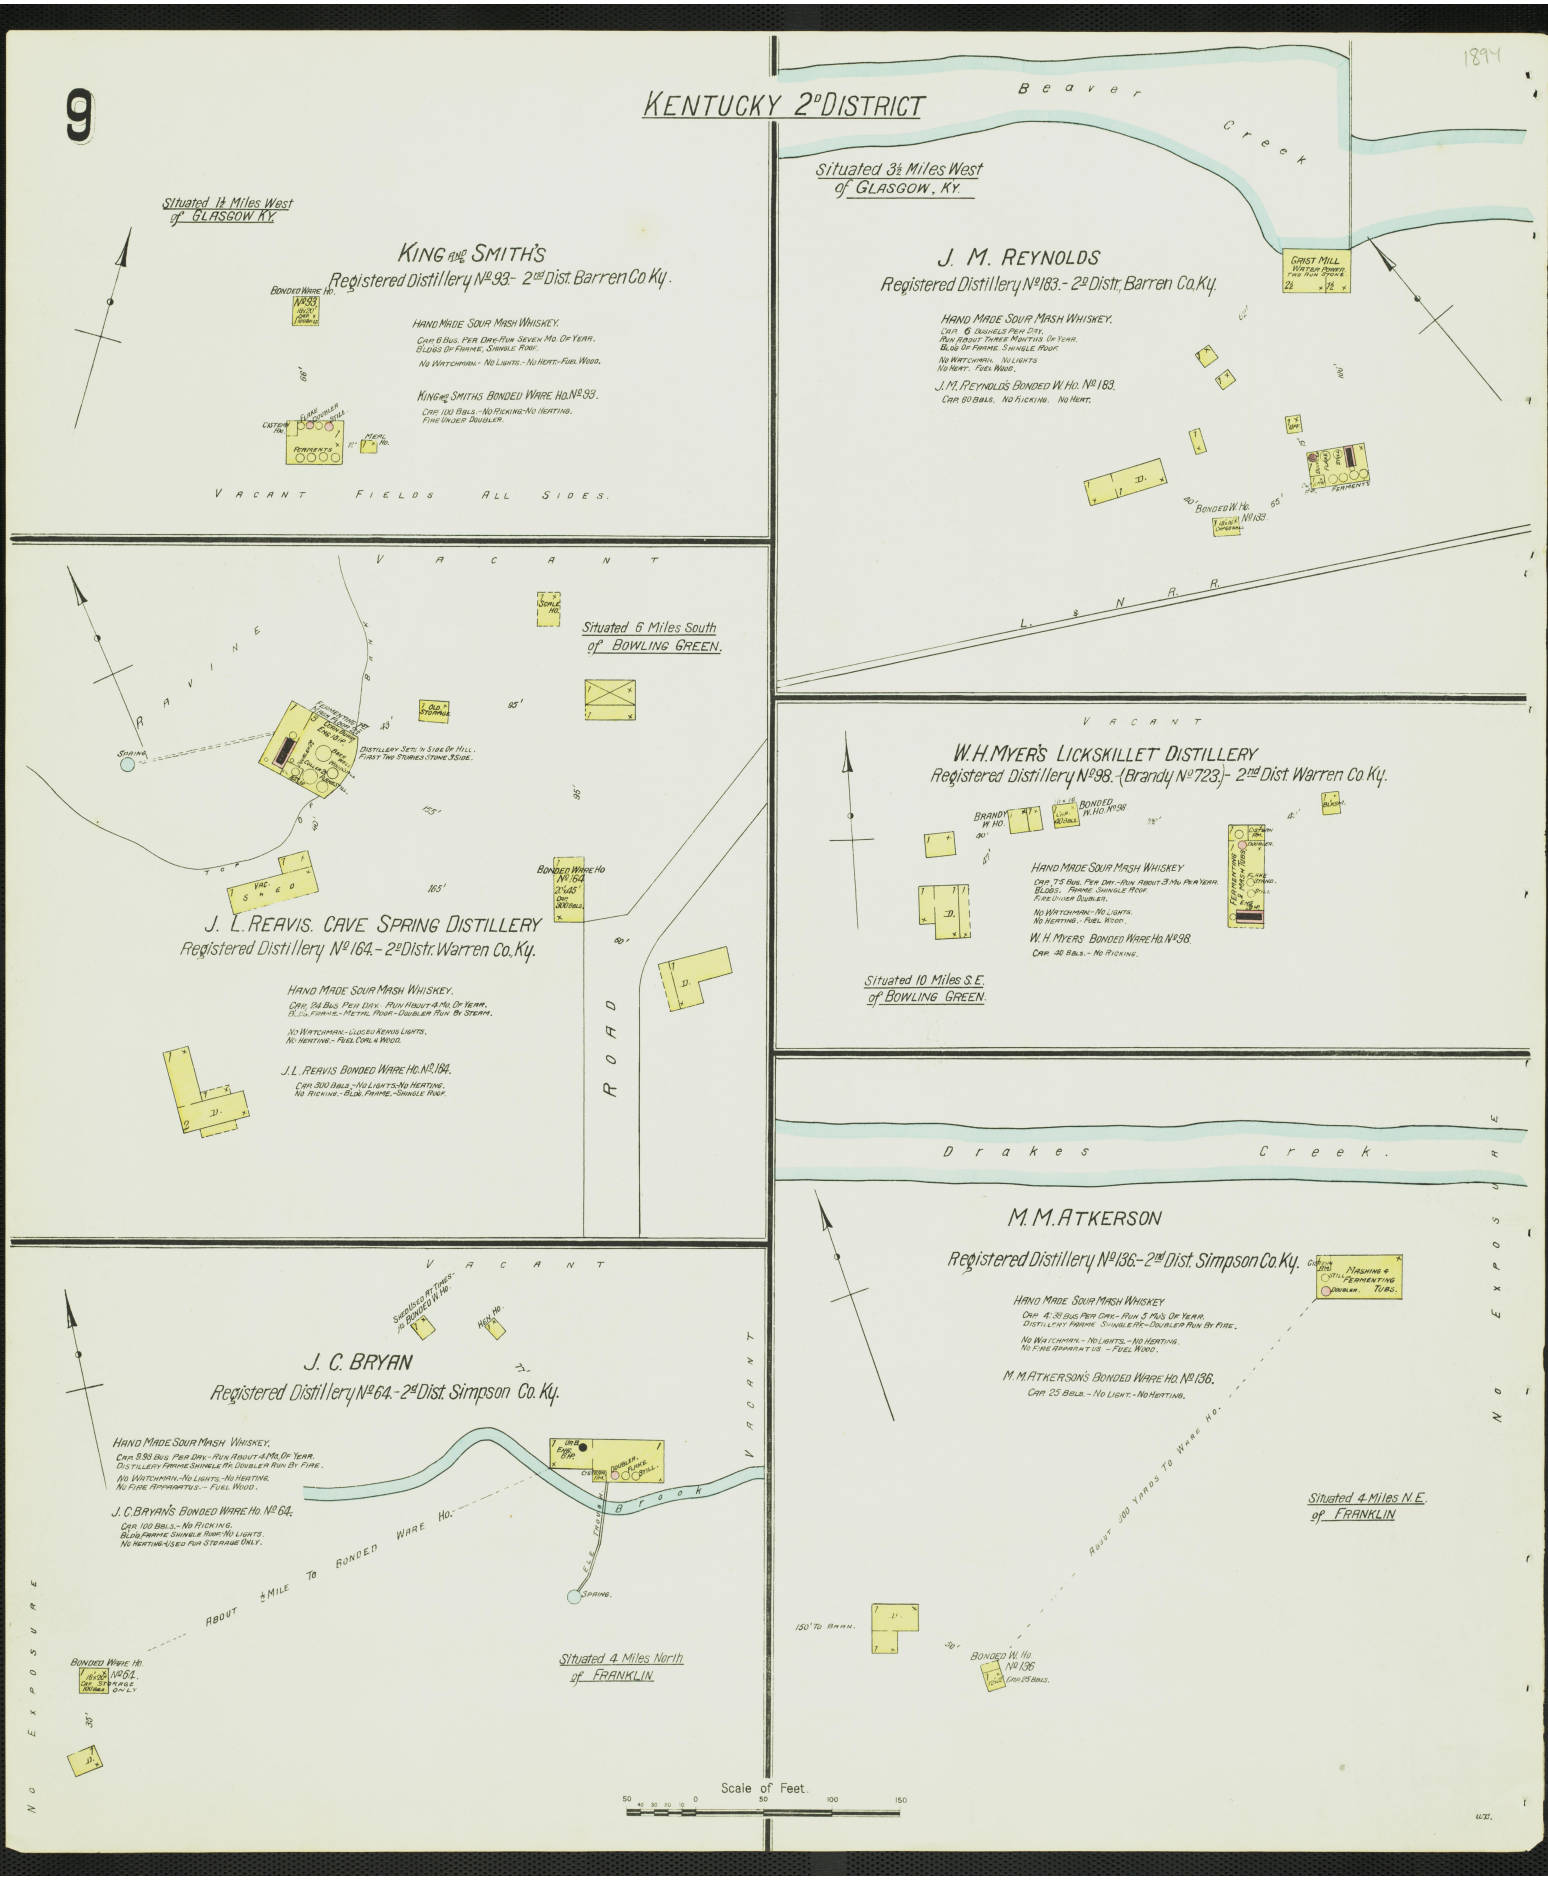
9
KENTUCKY 2D DISTRICT
1894
Situated 1½ Miles West of GLASGOW KY.
KING AND SMITH'S
Registered Distillery No. 93.- 2nd Dist. Barren Co. Ky.
BONDED WARE HO. No. 93.
HAND MADE SOUR MASH WHISKEY.
CAP. 6 BUS. PER DAY.-RUN SEVEN MO. OF YEAR.
BLDGS OF FRAME, SHINGLE ROOF.
NO WATCHMAN.- NO LIGHTS.- NO HEAT.- FUEL WOOD.
KING AND SMITHS BONDED WARE HO. No. 93.
CAP. 100 BBLS.- NO RICKING- NO HEATING.
FIRE UNDER DOUBLER.
CISTERN HO.
FLAKE DOUBLER STILL.
PERMENTS
MEAL HO.
VACANT FIELDS ALL SIDES.
Beaver Creek
Situated 3½ Miles West of GLASGOW, KY.
J. M. REYNOLDS
Registered Distillery No. 183.- 2D Distr. Barren Co. Ky.
GRIST MILL WATER POWER. TWO RUN STONE.
HAND MADE SOUR MASH WHISKEY.
CAP. 6 BUSHELS PER DAY.
RUN ABOUT THREE MONTHS OF YEAR.
BLDG OF FRAME. SHINGLE ROOF.
NO WATCHMAN. NO LIGHTS
NO HEAT. FUEL WOOD.
J. M. REYNOLDS BONDED W. HO. No. 183.
CAP. 60 BBLS. NO RICKING. NO HEAT.
BONDED W. HO. No. 183.
PERMENTS
L. & N. R. R.
VACANT
RAVINE
SPRING
OLD STORAGE
DISTILLERY SETS IN SIDE OF HILL.
FIRST TWO STORIES STONE 3 SIDE.
SHED
Situated 6 Miles South of BOWLING GREEN.
BONDED WARE HO No. 164
J. L. REAVIS. CAVE SPRING DISTILLERY
Registered Distillery No. 164.- 2D Distr. Warren Co. Ky.
HAND MADE SOUR MASH WHISKEY.
CAP. 24 BUS. PER DAY. RUN ABOUT 4 MO. OF YEAR.
BLDG. FRAME.- METAL ROOF.- DOUBLER RUN BY STEAM.
NO WATCHMAN.- CLOSED KEROS LIGHTS.
NO HEATING.- FUEL COAL & WOOD.
J. L. REAVIS BONDED WARE HO. No. 164.
CAP. 300 BBLS.- NO LIGHTS.- NO HEATING.
NO RICKING.- BLDG. FRAME.- SHINGLE ROOF.
ROAD
VACANT
W. H. MYER'S LICKSKILLET DISTILLERY
Registered Distillery No. 98.- (Brandy No. 723.)- 2nd Dist. Warren Co. Ky.
BRANDY W. HO.
BONDED W. HO. No. 98
HAND MADE SOUR MASH WHISKEY
CAP. 7.5 BUS. PER DAY.- RUN ABOUT 3 MO. PER YEAR.
BLDGS. FRAME. SHINGLE ROOF.
FIRE UNDER DOUBLER.
NO WATCHMAN.- NO LIGHTS.
NO HEATING.- FUEL WOOD.
W. H. MYERS BONDED WARE HO. No. 98.
CAP. 40 BBLS.- NO RICKING.
FERMENTING MASH TUBS.
Situated 10 Miles S.E. of BOWLING GREEN.
Drakes Creek.
M. M. ATKERSON
Registered Distillery No. 136.- 2nd Dist. Simpson Co. Ky.
MASHING & FERMENTING TUBS.
HAND MADE SOUR MASH WHISKEY
CAP. 4.38 BUS. PER DAY.- RUN 5 MO'S OF YEAR.
DISTILLERY FRAME. SHINGLE RF.- DOUBLER RUN BY FIRE.
NO WATCHMAN.- NO LIGHTS.- NO HEATING.
NO FIRE APPARATUS.- FUEL WOOD.
M. M. ATKERSON'S BONDED WARE HO. No. 136.
CAP. 25 BBLS.- NO LIGHT.- NO HEATING.
ABOUT 300 YARDS TO WARE HO.
Situated 4 Miles N.E. of FRANKLIN
150' TO BARN.
BONDED W. HO. No. 136
CAP. 25 BBLS.
NO EXPOSURE
VACANT
SHED USED AT TIMES HO. BONDED W. HO.
HEN HO.
J. C. BRYAN
Registered Distillery No. 64.- 2d Dist. Simpson Co. Ky.
HAND MADE SOUR MASH WHISKEY.
CAP. 9.98 BUS. PER DAY.- RUN ABOUT 4 MO. OF YEAR.
DISTILLERY FRAME. SHINGLE RF. DOUBLER RUN BY FIRE.
NO WATCHMAN.- NO LIGHTS.- NO HEATING.
NO FIRE APPARATUS.- FUEL WOOD.
J. C. BRYAN'S BONDED WARE HO. No. 64.
CAP. 100 BBLS.- NO RICKING.
BLDG. FRAME. SHINGLE ROOF.- NO LIGHTS.
NO HEATING.- USED FOR STORAGE ONLY.
ABOUT ½ MILE TO BONDED WARE HO.
ELK THOUGHT BROOK
SPRING.
BONDED WARE HO. No. 64.
CAP. STORAGE ONLY
Situated 4 Miles North of FRANKLIN
NO EXPOSURE
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY, 2ND DISTRICT

1894

Ohio River

AT LEITCHFIELD
1/4 Mile S.E. of Court Ho.

ABOUT 320' TO HARRISONS BONDED W. HO. No 1 & 2

J. T. HARRISON
Registered Distillery No 40, 2nd Dist- Grayson Co., Ky.

HAND MADE SOUR MASH WHISKEY. CAP. 5 BUS. PER DAY

RUN FIVE MONTHS PER YEAR. FR. STILL HO. SHINGLE RF.
NO WATCHMAN. FUEL WOOD & COBS. NO HEATING
NO LIGHTS. NO FIRE APPARATUS.

J.T. HARRISON BONDED W. HO
CAPCY. 75 BBLS. FRAME BLDG. SHINGLE ROOF
NO HEATING. NO LIGHTS. NO RICKING.

J.T. HARRISON, BONDED W. HO.

1/8 MILE TO HAWKINS & SONS DISTLY.

BROOK

AT LEITCHFIELD
1/2 Mile S.E. of Court Ho.

HAWKINS AND SON
Registered Distillery No 175, 2nd District.
Grayson Co. Ky.

HAND MADE SOUR MASH WHISKEY
CAPCY. 6 BUSHELS PER DAY.

RUN EIGHT MONTHS PER YEAR. FR. STILL HO.-SHINGLE RF.
NO WATCHMAN. NO HEATG. LIGHTS. KEROS. LANTERNS.
FUEL WOOD & COBS. 25' OF 1" HOSE.

HAWKINS & SON, BONDED W. HO.
CAP. 80 BBLS. FRAME BUILDING SHINGLE ROOF.
NO HEATING. NO LIGHTS. NO RICKING

HAWKINS & SON BONDED W. HO.

BROOK

VACANT

VACANT

AT HAWESVILLE
3/4 Miles N.W. of Court Ho.

LOUISVILLE, ST. LOUIS & TEXAS R.R.

CATTLE SHED. 180' LONG.

C. F. BREIDENBACH
Registered Distillery No 129, 2nd Dist- Hancock Co., Ky.

HAND MADE SOUR MASH WHISKEY. CAPCY. 25 BUS. PER 24 HOURS.
RUN FULL CAPACITY.

RUN ABOUT SIX MONTHS PER YEAR.
FRAME STILL HO. METAL ROOF.
NIGHT WATCHMAN. NO HEATING. FUEL COAL & COBS.
OPEN KEROSENE LIGHTS. 100' OF 1" HOSE.

C.F. BREIDENBACH BONDED W. HO. No 129
CAPCY. 400 BBLS. FR. BLDG. METAL ROOF.
USED FOR STORAGE ONLY. NO RICKING.
NIGHT WATCHMAN. NO HEATG. KEROS. LIGHTS.

BONDED W. HO. No 129 (30' x 50') USED FOR STORAGE ONLY. CAPACT 400 BBLS.

VACANT FIELDS.

Situated 1/2 Miles N.E. of Owensboro.

TOP OF BANK

INCLINE TO WATER PIPE

GLENMORE DISTILLERY, R. MONARCH AND CO.
Registered Distillery No 24, 2nd Dist.- Davies Co., Ky.

HAND MADE SOUR MASH WHISKEY.- CAP 900 BUS. PER 24 HOURS
PRODUCTION ABOUT 700 BUSHELS.

OPERATED ABOUT FIVE MONTHS PER YEAR. FRAME DISTILLERY -SHINGLE RF.
NIGHT WATCHMAN & CLOCK, 3 STATIONS. NO HEAT. FUEL COAL & COBS.
LIGHTS KEROSENE LAMPS. CITY WATER. 50' OF 1" HOSE.

OFFICE

CORN CRIB

SOUR MASH FLOOR

SWEET MASH FLOOR 2ND

COOLING

FERMENTING TUBS

FUEL RM.

Cy. 70'

FOUNDATION OF WARE HO'S. DESTROYED BY FIRE APRIL 7TH 1893

BARREL STORE

SCALE HO.

SHED

CATTLE YARD.

CATTLE SHEDS

CATTLE SHED

CATTLE SHED

CATTLE SHED

CATTLE SHED

ONE HALF MILE TO SOUR MASH DISTL'Y. No 17.

VACANT FIELDS

SHED

TROUGH

VACANT

VACANT

HAY & STOCK BARN

BEST AND SON BONDED W. HO

Situated on Ohio River
4 Miles N. of HAWESVILLE and
2 1/2 Miles N.E. of PETRI STATION.

BEST AND SON
Registered Distillery No 93, Whiskey. (No 690 Brandy.)
2nd Dist.- Hancock Co. Ky.

HAND MADE SOUR MASH WHISKEY. CAP. 360 BUS PER DAY
PRODUCTION 60 BUSHELS.

RUN ABOUT NINE MONTHS PER YEAR. FR. BLDG. SHINGLE RF.
NO WATCHMAN. KEROS. LIGHTS. USED OCCASIONALLY (CLOSED)
NO HEATING. FUEL COAL & COBS. F. PUMP & 100 14" HOSE.
WATER SUPPLY FROM WELLS.

BEST & SON BONDED W. HO. (30' x 50')
CAPCY. 600 BBLS. FRAME BLDG. SHINGLE ROOF.
PATENT RACKS. SEVEN TIERS.

BONDED W. HO (20' x 30')
CAP. 300 BBLS. FRAME BLDG. SHINGLE ROOF
PATENT RACKS. FIVE TIERS.

WARE HOUSES USED FOR STORAGE ONLY. NO HEATING.
NO WATCHMAN. CLOSED KEROS. LIGHTS.

ABOUT 300' TO OHIO RIVER.

CABIN

200' TO FRAME DWG.

BARREL HOUSE

SHED

FERMENTING

MASH FLOOR 2ND

STILL

BOILER

ENGINE

COOLING

F.P.

CORN CRIB

30' x 50' BEST & SON BONDED W. HO. CAP. 600 BBLS. PAT. RACKS. SEVEN TIERS. (STORAGE ONLY)

CORN CRIB

CATTLE SHED 100' LONG.

ROAD

Scale of Feet.

50 40 30 20 10 0 50 100 150

1894
NEXT PAGE
14

THIS PAGE LEFT BLANK FOR SURVEYS OF NEW DISTILLERIES WHICH MAY BE BUILT IN THIS DISTRICT.

KENTUCKY, 5TH DISTRICT

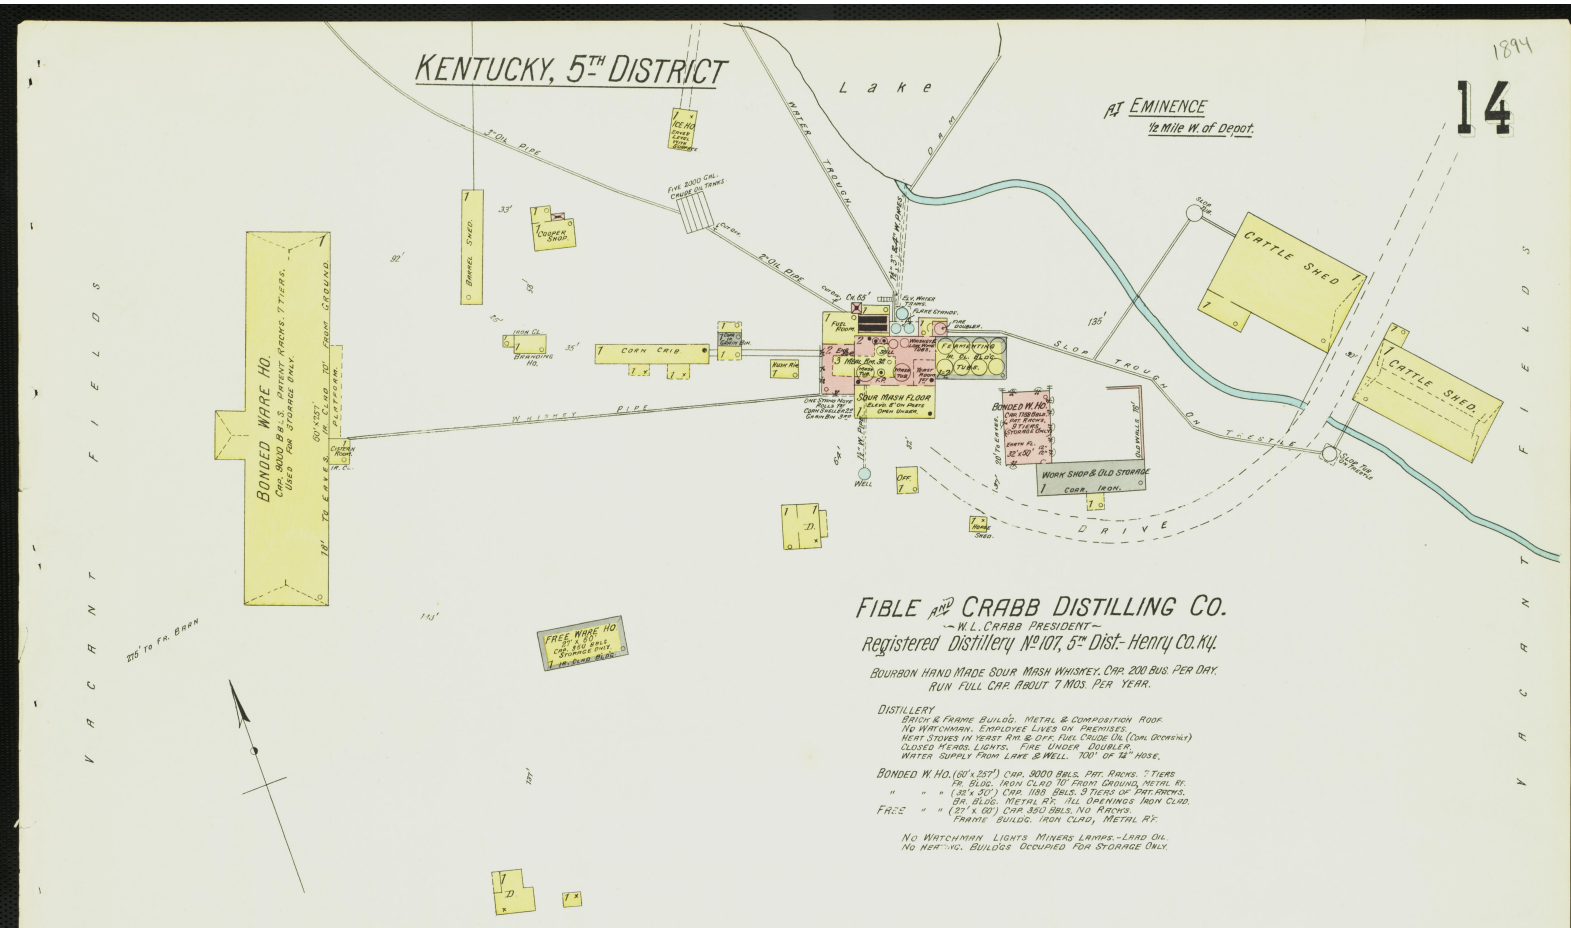

FIBLE AND CRABB DISTILLING CO.

— W. L. CRABB PRESIDENT —

Registered Distillery No 107, 5th Dist:- Henry Co. Ky.

Bourbon Hand Made Sour Mash Whiskey. Cap. 200 Bus. Per Day.
Run Full Cap. About 7 Mos. Per Year.

Distillery
Brick & Frame Builds. Metal & Composition Roof.
No Watchman. Employee Lives on Premisses.
Heat Stoves in Yeast Rm. & Off. Fuel Coal & Oil (Coal Generator)
Closed Heads. Lights. Fire Under Doubler.
Water Supply From Lake & Well. 100' of ¾" Hose.

Bonded W. Ho. (60' x 257') Cap. 9000 Bbls. Pat. Racks. 7 Tiers
Fr. Bldg. Iron Clad 70' From Ground. Metal Rf.
" " " (.32' x 30') Cap. 1188 Bbls. 9 Tiers of Pat. Racks.
Br. Bldg. Metal Rf. All Openings Iron Clad.
Free " " (27' x 60') Cap. 350 Bbls. No Racks.
Frame Builds. Iron Clad, Metal Rf.

No Watchman Lights Miners Lamps.- Lard Oil.
No Heat. No. Buildgs Occupied For Storage Only.

NO EXPOSURE

AT PLEASURE RIDGE PARK

About 8 Miles S.W. of Louisville Court Ho.

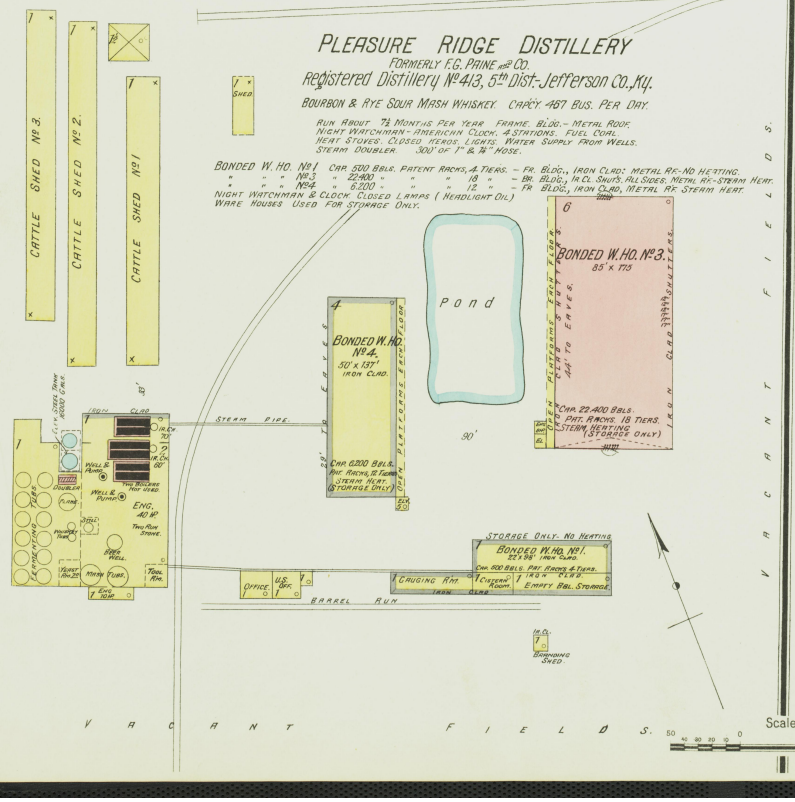

PLEASURE RIDGE DISTILLERY

Formerly F.G. Paine and Co.

Registered Distillery No 413, 5th Dist- Jefferson Co., Ky.

Bourbon & Rye Sour Mash Whiskey. Capcy. 487 Bus. Per Day.

Run About 7½ Months Per Year. Frame. Bldg.- Metal Roof.
Night Watchman- American Clock. 4 Stations. Fuel Coal.
Heat Stoves. Closed Heads. Lights. Water Supply From Wells.
Steam Doubler. 300' of 1" & ¾" Hose.

Bonded W. Ho. No 1 Cap. 500 Bbls. Patent Racks. 4 Tiers. - Fr. Bldg., Iron Clad: Metal Rf.- No Heating.
" " " No 3. " 22400 " " " 18 " - Br. Bldg.; In Cl. Shutts. All Sides. Metal Rf.- Steam Heat.
" " " No 4. " 6200 " " " 12 " - Fr. Bldg., Iron Cl. Rd., Metal Rf. Steam Heat.
Night Watchman & Clock. Closed Lamps (Kerolight Oil.)
Ware Houses Used For Storage Only.

Situated about 48 Miles S.W. of Louisville
and 10 Miles W. of Vine Grove

JAS. T. WHEATLEY

Registered Distillery No 452 - 5th Dist- Meade Co., Ky.

Bourbon Hand Made Sour Mash Whiskey. Cap. 1444 Bus. Per Day.

Run Four Months Per Year. - Fr. Bldg. Metal & Shingle Rf.
No Watchman. No Heating. No Lights. No Fire Aps.
Fire Doubler.

Bonded W. Ho.
Cap. 200 Bbls. No Racks. In Cl. Bldg. Metal Roof.
Used For Storage Only. No Lights. No Heating.
No Watchman.

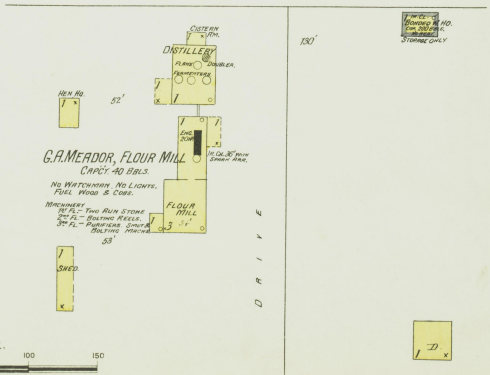

Scale of Feet.

KENTUCKY 5TH DISTRICT

1894

J. G. MATTINGLY AND SON.

Registered Distillery No 6. 5th Distr. Jefferson Co. Ky.

Product, Bourbon Whiskey - Cap. 204 Bushels Per Day - Run Full Cap About Six Months Per Year -

Frame Building - Metal Roof - Fire Under Doubler - No Watchman - Closed Lard Oil Lamps - No Heating - Stove in Office - Fuel Coal - 100' 2" Hose in Distillery - City Water & Private Supply From Wells -

Bonded Ware No. No 1.
Cap. 2500 Bbls - Patent Racks - 12 Tiers - Steam Heat 60° to 90°

Bonded Ware No. No 2.
Cap. 3000 Bbls - Patent Racks - 15 Tiers - No Heating - Brick Building - Metal Roof - Closed Lard Oil Lamps - No Watchman - Ware Houses Used For Storage Only -

Ft Louisville
3 Miles W. of Court Ho.

CRYSTAL SPRING DISTILLING CO.

Crystal Spring Distillery Christian Stege
Registered Distillery No 78 - 5th Distr. Jefferson Co. Ky.
Also Run As Taylor & Williams, Bonnie Bros. Louis Zapp & Co.
Product, Bourbon & Rye Sour Mash Whiskey - Cap. 231 Bu. - Produce 142 Bushels Per Day - Run 8 Months Per Year -
Brick Building - Shingle Roof - Fire & Steam Doubler - No Watchman - Night Store Keeper - Closed Kerosene Lights - No Heating 100' 14" Hose -

Crystal Spring Bonded Ware No. No 78.
Cap. 12700 Bbls - Patent Racks - 9 To 11 Tiers - Brick Building - Metal Roof - Heat Steam - Closed Lights - No Watchman - Night Store Keeper -

Garland Bonded Ware Ho. No 3.
Cap. 22,000 Bbls - Patent Racks & 9 To 12 Tiers - Heat Steam

Garland Distillery Christian Stege
Registered Distillery No 3. 5th Distr. Jefferson Co. Ky.
Also Run As Garfelder & Tachau, Taylor & Williams, L. Oppenheimer & Co., H. Gehner & Co., Daisy Distilling Co., F. Madliner, Louis Zapp & Co., S. Garfelder.
Product, Bourbon & Rye Sweet Mash Whiskey - Cap. 430 Bushels - Produce 258 Bushels Per Day - Run Ten Months Of Year -
Brick & Frame Building - Metal & Composition Roof - Fire Under Doubler - No Watchman - Fuel Coal - Night Store Keeper - Closed Kerosene Lamps - Steam Heat - Stove In Yeast Rm. - City Water - 125' 1¼" Hose

Garland Bonded Ware No. No 3.
Cap. 22000 Bbls - Patent Racks - 9 To 12 Tiers - Brick Building Metal Roof - Heat Steam - Closed Lights - No Watchman - Night Store Keeper -

Ft Louisville
2 Miles S.E. of Court Ho.

AMERICAN DISTILLING CO. E. M. BABBITT - FORMERLY D. L. GRAVES

Registered Distillery No. 354 - 5th Distr. Jefferson Co. Ky.

Also Run As L. Zapp & Co., Chas. Barrow & Co., Mayflower Distilling Co., L. Simon & Co., B. Kuhlman & Co., Jno. T. Barber & Co., Cream Of Nelson Distilling Co.

Production Bourbon & Rye Sour Mash Whiskey - Cap. 240 Bushels Per Day - Run Full Capcy About Six Months Of Year -
Frame Building Metal & Shingle Roof - Fire Under Doubler - No Watchman - No Heating - Stove In Yeast Room & Office - Closed Lights - Signal Oil - Fuel Coal - Water Supply From Well & Creek 100' 1¼" Hose

Bonded Ware No. No 354-A.
Capcy. 5000 Bbls - Patent Racks - 12 Tiers - Brick Building - Metal Roof - All Openings Ir. Clad - Heat Steam -

Bonded Ware No. No 354-B.
Capcy 5000 Bbls - Patent Racks - 9 Tiers - Brick Building - Gravel Rf. - All Openings Ir. Clad - No Heating -

Bonded Ware No. No 354-C.
Capcy. 3000 Bbls - Patent Racks - 12 Tiers - Frame Building - Ir. Cl. Gravel Roof - Steam Heat -

Ware Houses Used For Storage Only - No Watchman - Closed Lights - Signal Oil -

Ft Louisville
3 Miles E. of Court Ho.

Scale of Feet

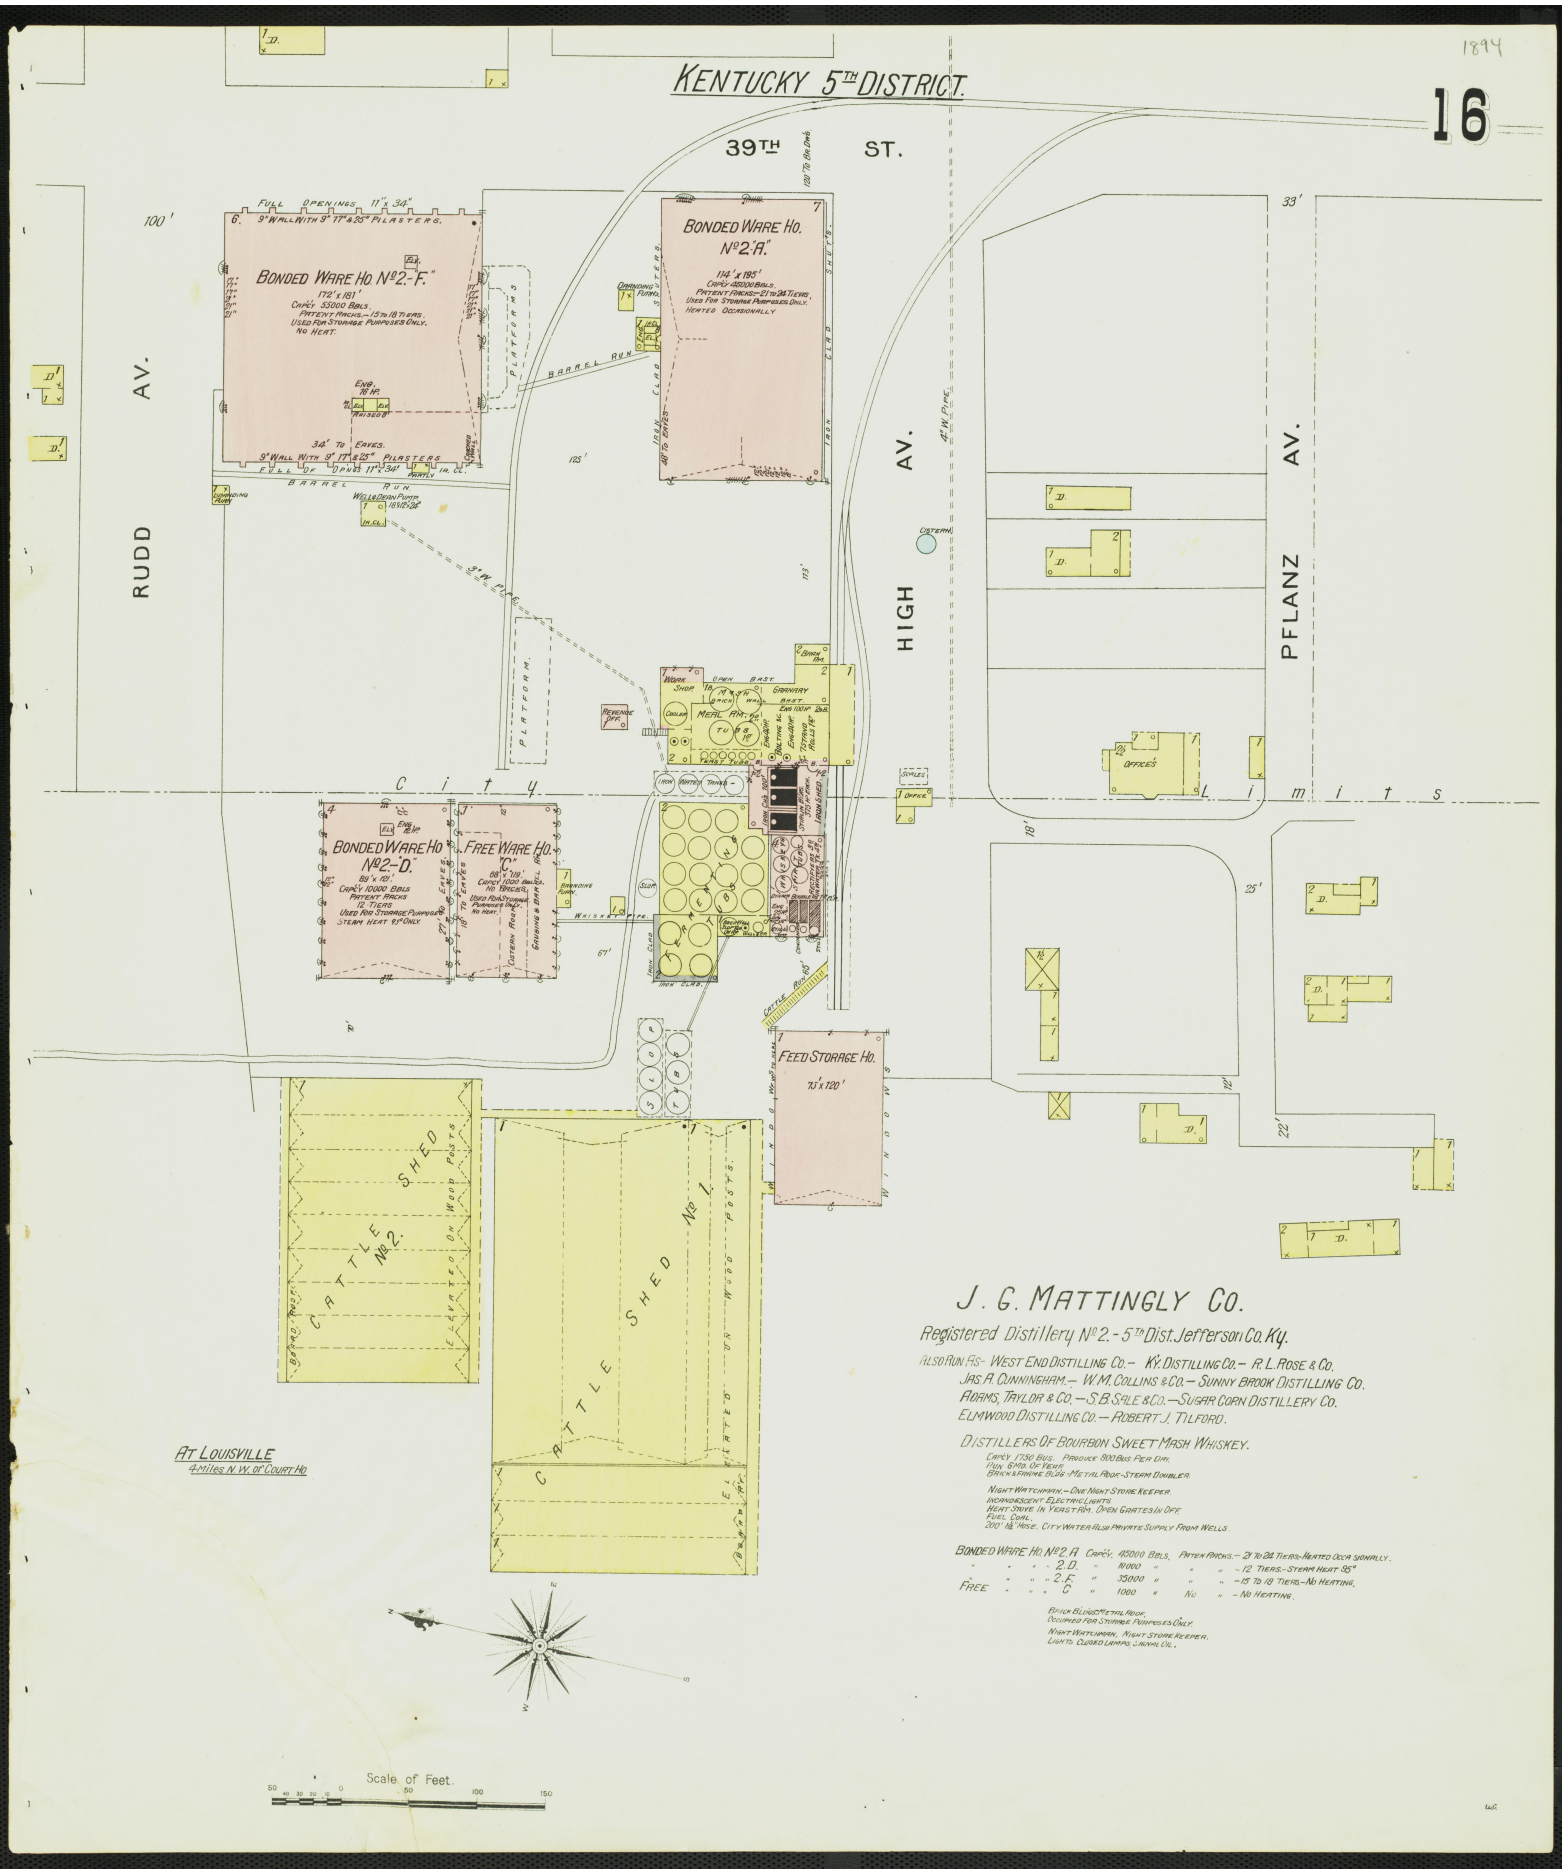

J. G. MATTINGLY CO.

Registered Distillery No 2.-5th Dist. Jefferson Co. Ky.

ALSO RUN AS- WEST END DISTILLING CO.- KY. DISTILLING CO.- R. L. ROSE & CO.
JAS. A. CUNNINGHAM.- W. M. COLLINS & CO.- SUNNY BROOK DISTILLING CO.
ADAMS, TAYLOR & CO.- S. B. SALE & CO.- SUGAR CORN DISTILLERY CO.
ELMWOOD DISTILLING CO.- ROBERT J. TILFORD.

DISTILLERS OF BOURBON SWEET MASH WHISKEY.

CAP'Y 1750 BBLS. PRODUCE 800 BBLS PER DAY.
RUN 6 MO. OF YEAR
BRICK & FRAME BLDG.-METAL ROOF.-STEAM DOUBLER.

NIGHT WATCHMAN.- ONE NIGHT STORE KEEPER.
INCANDESCENT ELECTRIC LIGHTS
HEAT STOVE IN YEAST RM. OPEN GRATES IN OFF.
FUEL COAL.
200' 1½" HOSE. CITY WATER ALSO PRIVATE SUPPLY FROM WELLS.

BONDED WARE HO. No 2. A	CAP'Y.	45000 BBLS.	PATEN RACKS.-	21 TO 24 TIERS.-	HEATED OCCASIONALLY.
" " " " 2.D.	"	10000 "	"	"	- 12 TIERS.- STEAM HEAT 95°
" " " " 2.F.	"	55000 "	"	"	- 15 TO 18 TIERS.- NO HEATING.
FREE " " " C	"	1000 "	NO	"	- NO HEATING.

BRICK BLDGS. METAL ROOF.
OCCUPIED FOR STORAGE PURPOSES ONLY.
NIGHT WATCHMAN. NIGHT STORE KEEPER.
LIGHTS CLOSED LAMPS SIGNAL OIL.

17

KENTUCKY, 5TH DISTRICT

HOWARD ST. — 4" W. PIPE — WATER ST. — 4" W. PIPE

AT LOUISVILLE
About 3½ Miles N.W. of Court Ho.

W. S. HARRIS, FORMERLY WALLWORK AND HARRIS

Registered Distillery No. 414, 5th Dist.-Jefferson Co., Ky.

Bourbon Sour Mash Whiskey.- Capcy. 404 Bus. per day. Produce about 300 Bus.

Run 4 Months per year.- Br. & Fr. Bldg. Gravel Rf. Night Watchman & Clock.- 4 Stations. No Heating. Stove in Off. Fire Doubler. Fuel Coal. Closed Lamps (Head Light Oil.) City Water. 150' of 1¼" Hose.

Bonded W. Ho No. 414-"A" Cap. 9936 Bbls. Patent Racks. 12 Tiers.
" " " No. 414-"B" Cap. 11304 Bbls. Patent Racks. 18 Tiers.

Frame Bldgs. Iron Clad. Metal Roof. Night Watchman & Clock. Heated by Steam when running to 60° Lights. Dark Lanterns. (Sperm Oil.)

Bonded W. Ho. No. 414-"B" — Capcy. 11304 Bbls. Pat. Racks. 18 Tiers. Steam Heated. Hoist. (Grain Running) by Steam to 60°

Bonded W. Ho. No. 414-"A" — Capcy. 9936 Bbls. Pat. Racks. 12 Tiers. Hoist. (Grain Running) by Steam to 60°

Carpr. Shop

Storage

Machine Shop

Faught, Deering Co.
Mfrs. of Cotton Gin Drivers.

Ware Ho.

Horse Power

Office U.S. Gauger

Cistern

Gauging Rm.

Slop Tubs

Fire Extinguishing Tubes

Building

Double

Steam

Fuel

Gauge

Water Connections

Boiling Room

Meal Room

Engine Room

Boiler Room

Chimney

Iron Clad Shutters

Iron Clad Doors

Iron Clad Roof

Iron Clad Sliding Doors

Iron Clad Hinged Doors

Iron Clad Sliding Doors

Iron Clad Hinged Doors

Iron Clad Shutters

Iron Clad Doors

Iron Clad Roof

KENTUCKY - 5TH DISTRICT

MOORE AND SELLINGER'S
ASTOR DISTILLERY, No 364 AND BELMONT DISTILLERY, No 412

NIGHT WATCHMAN & CLOCK, 6 STATIONS - HEAT STOVES - FUEL COAL -
LIGHTS CLOSED LAND OIL LAMPS - CITY WATER - 150' 1¼" HOSE IN EACH DISTILLERY -

ASTOR DISTILLERY - Registered No 364 - 5th Distr. Jefferson Co. Ky.
PRODUCTION - BOURBON & RYE - SWEET MASH WHISKEY
CAPCY 450 BUS. PER DAY - RUN THREE MONTHS IN THE YEAR
BRICK BLDG. METAL ROOF - FIRE UNDER DOUBLER -

BELMONT DISTILLERY - Registered No 412 - 5th Distr. Jeff. Co. Ky.
PRODUCTION BOURBON - SOUR MASH WHISKEY -
CAPCY 762 BUS. PER DAY - PRODUCE ABOUT 300 BUS. PER DAY
RUN THREE MONTHS IN YEAR - BRICK BLDG. - METAL ROOF - STEAM DOUBLER -

WARE HOUSES

FREE WARE HO. "A" - CAPCY 4000 BBLS. - PATENT RACKS - 10 TIERS - NO HEATING
ASTOR BONDED WARE HO. "B" - CAPCY 3600 BBLS. - PAT. RACKS - 12 TIERS - STEAM HEAT WHEN RUNNING 80°F.
BELMONT DO. DO. "B" CAPCY 15360 BBLS. PAT. RACKS - 12 TIERS - STEAM HEAT WHEN RUNNING 80°F.
MOORE & SELLINGER'S BONDED WARE HO. "C" - CAPCY 10080 BBLS. - PAT. RACKS - 12 TIERS - STEAM HEAT WHEN RUNNING 80°F.
ASTOR BONDED WARE HO. - "D" - CAPCY 3600 BBLS. - PAT. RACKS - 15 TIERS - HEATED WHEN RUNNING 90°F.
MOORE & SELLINGER'S BONDED WARE HO. "D" - CAPCY 9000 BBLS. - PAT. RACKS - 15 TIERS - HEATED WHEN RUNNING 90°F.
WARE HOUSES BRICK - METAL ROOF - IRON CLAD SHUTS - USED FOR STORAGE ONLY.
NIGHT WATCHMAN & CLOCK - LIGHTS CLOSED LAND OIL LAMPS -

WEDEKIND, HALLENBERG & BRO. TANNERY
BARK SHED
MOORE AND SELLINGER'S CATTLE SHEDS
ASTOR BONDED WARE HO. CAP. 3800 BBLS. B PAT. RACKS 12 TIERS USED FOR STORAGE ONLY.
BELMONT BONDED WARE HO. "B" CAPCY 15360 BBLS PAT. RACKS - 12 TIERS 104' X 173'
HEAT STEAM WHEN RUNNING AT 80°F. IRON CLAD SHUTTS ALL SIDES
OFFICE
MASH FLOOR 84' X 67' CEMENT FLOOR
BEER WELLS
BRICK FERMENTING VATS 44' X 97'
ASTOR DISTILLERY
SLOP TROUGH
SLOP TUBS
BRANDING SHED
FREE WARE HO "A" CAPCY 4000 BBLS PAT. RACKS 10 TIERS 47' X 100' 28' TO EAVES (STORAGE ONLY)
ASTOR BONDED WARE HO "D" CAP. 2600 BBLS PAT. RACKS 15 TIERS 63' X 80'
MOORE & SELLINGER BONDED WARE HO. "D" CAP. 9000 BBLS - PAT. RACKS - 15 TIERS 108' X 177' IR. CLAD SHU. ALL SIDES - 34' TO EAVES USED FOR STORAGE ONLY
MOORE & SELLINGER BONDED WARE HO "C" CAP. 10080 BBLS - PAT. RACK - 12 TIERS 108' X 110' IR. CLAD SHU. ALL SIDES - 28' TO EAVES STEAM HEAT WHEN RUNNING 80°F. USED FOR STORAGE ONLY
17TH ST.
18TH ST.
LEXINGTON ST.
4" W. PIPE
AT LOUISVILLE, KY
3 Miles S. W. of Court Ho.

WILLIAMS ST.
6" W. PIPE
FRANKFORT ST.
6" W. PIPE
MELLWOOD DISTILLERY No 34
RUNNYMEDE DISTILLERY No 12
THE RUNNYMEDE DISTILLING CO.
Registered Distillery No 12 - 5th Distr. Jefferson Co. Ky.
PRODUCTION BOURBON AND RYE SOUR AND SWEET MASH WHISKEY
CAPCY 600 BUS. SWEET MASH AND 400 BUS. SOUR MASH
RUN ABOUT 7 MONTHS IN THE YEAR -
BRICK AND FRAME BLDG. - STEEL GIRDERS - IRON POSTS - IRON OR WOOD ROOF - GRAVEL AND METAL ROOF - STEEL CONVEYORS IN MILL ROOM - FIRE DOUBLER -
NIGHT WATCHMAN & CLOCK - LIGHTS SIGNAL OIL CLOSED LAMPS - FUEL COAL - NO HEATING
HYDRANT & 300' HOSE IN FIRE RM.
TO HAVE LARGE HOSE IN DISTILLERY
BONDED WARE HO. No 12 G. - CAPCY 4000 BBLS. - PATENT RACKS - 15 TIERS - BRICK BLDG. - METAL ROOF - IRON CLAD SHUTTS ALL SIDES - USED FOR STORAGE ONLY
BONDED WARE HO - No 34 - F CAPCY 34000 BBLS - PATENT RACKS - 100' X 270' - 18 TIERS - USED FOR STORAGE ONLY - IRON CLAD SHUTS ALL SIDES -
BONDED WARE HO No 34 B CAP. 4400 BBLS - PAT. RACKS - 15 TIERS STOMPED JUNE 1894 TIN CLAD SHUTT
BONDED WARE HO. No 34 C CAP. 9880 BBLS - PAT. RACKS - 15 TIERS - USED FOR STORAGE ONLY -
BONDED WARE HO No 34 - E CAP. 10080 BBLS - PAT. RACKS - 12 TIERS - 81' X 100' - 56' TO EAVES - IR. CLAD SHUTS ALL SIDES - USED FOR STORAGE ONLY.
BONDED WARE HO No 34 - D CAP. 8000 BBLS - PAT. RACKS - 10 TIERS - 75' X 125' - 25' TO EAVES - IRON CLAD SHUTS ALL SIDES - USED FOR STORAGE ONLY -
FREE WARE HO. CAP. 1800 BBLS 47' X 55' STORAGE ONLY
OFFICES
IRON SHED
F.A.TEL. BOX
CORAL BIN.
DRIVE
AV.
RESERVOIR
CATTLE SHED
REPORT OF THE RUNNYMEDE DISTILLING CO'S WARE HO.
BONDED WARE HO. No 12 G. - CAPCY 14000 BBLS. - PATENT RACKS - 15 TIERS - BRICK BLDG. - METAL ROOF - ALL OPENINGS IRON CLAD - NIGHT WATCHMAN AND CLOCK - LIGHTS SIGNAL OIL CLOSED LAMPS - HEAT STEAM - 60° TO 95°F.
THE MELLWOOD DISTILLERY CO
R. F. BALKE PREST
Registered Distillery No 34 - 5th Distr. Jefferson Co. Ky
CAPCY 1000 BUS. - MASH 1000 BUS. PER DAY - RUN 7 MONTHS IN THE YEAR -
PRODUCTS BOURBON AND RYE - SWEET MASH -
BRICK AND FRAME BLDG. - METAL ROOF - FIRE DOUBLER - NIGHT WATCHMAN & CLOCK - 13 STATIONS - LIGHTS SIGNAL OIL CLOSED - FUEL COAL - HYDRANTS & 2½" HOSE AT 5 STATIONS - 250 2½" HOSE ON DUTY.
WARE HOUSES
FREE WARE HO. A CAPCY 1800 BBLS - NO RACKS - NO HEAT
BONDED WARE HO. No 34 B CAP. 4400 BBLS - PAT. RACKS - 15 TIERS - BR. BLDG - METAL RF. - ALL OPEN INCLAD
DO. DO. No 34 C - CAPCY 9700 BBLS - PAT. RACKS - 15 TIERS - BR. BLDG - METAL ROOF - ALL OPENS IRON CLAD
DO. DO. No 34 D - CAPCY 8000 BBLS - PAT. RACKS - 10 TIERS - BR. BLDG - METAL ROOF - ALL OPENS IRON CLAD
DO. DO. No 34 E - CAPCY 10080 BBLS - PAT. RACKS - 12 TIERS - BR. BLDG - METAL ROOF - ALL OPENS IRON CLAD
DO. DO. No 34 F - CAPCY 34000 BBLS - PAT. RACKS - NO FILLER - BR. BLDG - METAL RF. - ALL OPENS IN CLAD -
WARE HOUSES USED FOR STORAGE ONLY -
NIGHT WATCHMAN & CLOCK - LIGHTS SIGNAL OIL CLOSED
HEAT STEAM FROM 60° TO 80° TO EXCEPT 90° STOVE IN GRAUING RM. OF No 34 F.
ALSO RUN AS -
THE WM. BERGENTHAL CO. - C.W. CRAIG & CO.
BROWN FORMAN & CO. - LOUIS ZAPP & CO.
NORMANDY DIST. CO. - DUNDEE DIST. CO.
OLD CLUB HO. DIST. CO. - S.S.S. DIST. CO.
LIVE OAK DIST. CO. - AND THE CALIFORNIA VINEYARD CO.
LETTERLE AVE
IRON BRIDGE
Bear Grass Creek
AT LOUISVILLE, KY
1½ Mile East of Post Office
Scale of Feet
50 30 20 10 0 50 100 150

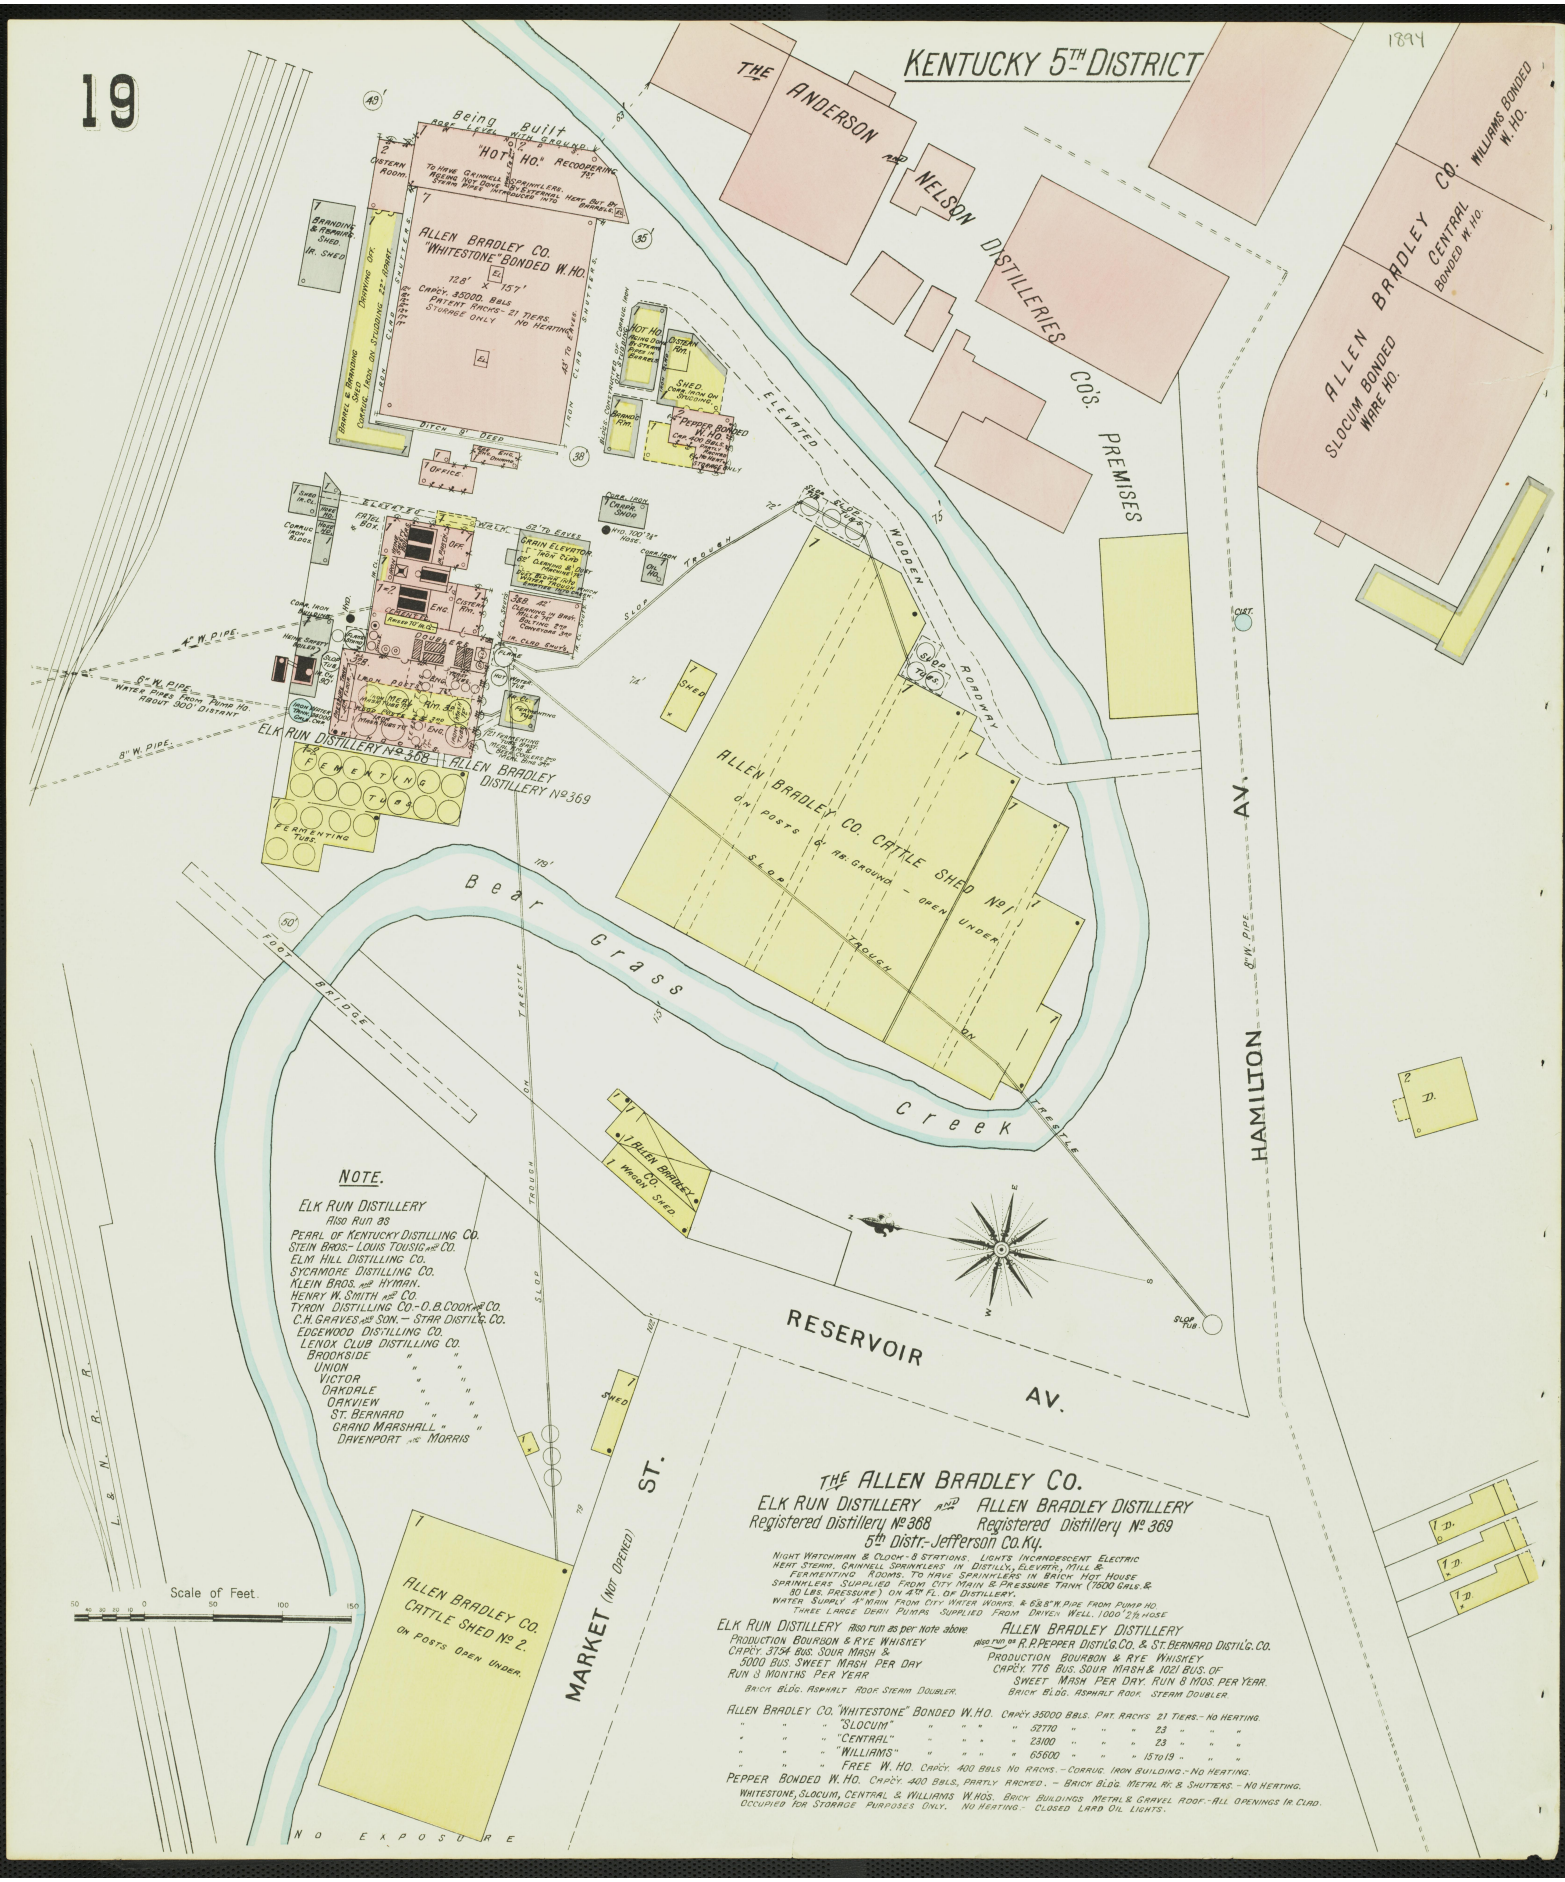
19
KENTUCKY 5TH DISTRICT
1894
THE ANDERSON AND NELSON DISTILLERIES CO'S. PREMISES
ALLEN BRADLEY CO. WILLIAMS BONDED W. HO.
CENTRAL BONDED W. HO.
SLOCUM BONDED WARE HO.
Being Built
"HOT HO." RECOOPERING TO
ALLEN BRADLEY CO. "WHITESTONE" BONDED W. HO.
128' X 157'
CAPCY. 35000. BBLS
PATENT RACKS - 21 TIERS.
STORAGE ONLY
NO HEATING
ELEVATED WOODEN ROADWAY
SLOP TROUGH
ELK RUN DISTILLERY No 368
ALLEN BRADLEY DISTILLERY No 369
FERMENTING TUBS
ALLEN BRADLEY CO. CATTLE SHED No 1
ON POSTS 6' AB. GROUND - OPEN UNDER
Bear Grass Creek
FOOT BRIDGE
HAMILTON AV.
RESERVOIR AV.
MARKET ST. (NOT OPENED)
ALLEN BRADLEY CO. CATTLE SHED No 2.
ON POSTS OPEN UNDER.
NO EXPOSURE
L. & N. R. R.
Scale of Feet.
NOTE.
ELK RUN DISTILLERY
Also Run as
PEARL OF KENTUCKY DISTILLING CO.
STEIN BROS.- LOUIS TOUSIG AND CO.
ELM HILL DISTILLING CO.
SYCAMORE DISTILLING CO.
KLEIN BROS. AND HYMAN.
HENRY W. SMITH AND CO.
TYRON DISTILLING CO.- O. B. COOK AND CO.
C. H. GRAVES AND SON. - STAR DISTIL'G. CO.
EDGEWOOD DISTILLING CO.
LENOX CLUB DISTILLING CO.
BROOKSIDE " "
UNION " "
VICTOR " "
OAKDALE " "
OAKVIEW " "
ST. BERNARD " "
GRAND MARSHALL " "
DAVENPORT AND MORRIS
THE ALLEN BRADLEY CO.
ELK RUN DISTILLERY AND ALLEN BRADLEY DISTILLERY
Registered Distillery No 368 Registered Distillery No 369
5th Distr.- Jefferson Co. Ky.
NIGHT WATCHMAN & CLOCK - 8 STATIONS. LIGHTS INCANDESCENT ELECTRIC
HEAT STEAM. GRINNELL SPRINKLERS IN DISTILLY., ELEVATR., MILL &
FERMENTING ROOMS. TO HAVE SPRINKLERS IN BRICK HOT HOUSE
SPRINKLERS SUPPLIED FROM CITY MAIN & PRESSURE TANK (7500 GALS. &
80 LBS. PRESSURE) ON 4TH FL. OF DISTILLERY.
WATER SUPPLY 4" MAIN FROM CITY WATER WORKS. & 6" & 8" W. PIPE FROM PUMP HO.
THREE LARGE DEAN PUMPS SUPPLIED FROM DRIVEN WELL. 1000' 2½ HOSE
ELK RUN DISTILLERY Also run as per Note above
PRODUCTION BOURBON & RYE WHISKEY
CAPCY. 3754 BUS. SOUR MASH &
5000 BUS. SWEET MASH PER DAY
RUN 8 MONTHS PER YEAR
BRICK BLDG. ASPHALT ROOF STEAM DOUBLER.
ALLEN BRADLEY DISTILLERY
Also run as R. P. PEPPER DISTIL'G. CO. & ST. BERNARD DISTIL'G. CO.
PRODUCTION BOURBON & RYE WHISKEY
CAPCY. 776 BUS. SOUR MASH & 1021 BUS. OF
SWEET MASH PER DAY. RUN 8 MOS. PER YEAR.
BRICK BLDG. ASPHALT ROOF. STEAM DOUBLER.
ALLEN BRADLEY CO. "WHITESTONE" BONDED W. HO. CAPCY. 35000 BBLS. PAT. RACKS 21 TIERS.- NO HEATING.
" " " "SLOCUM" " " " " 52770 " " " 23 " " "
" " " "CENTRAL" " " " " 23100 " " " 23 " " "
" " " "WILLIAMS" " " " " 65600 " " " 15 TO 19 " " "
" " " FREE W. HO. CAPCY. 400 BBLS NO RACKS.- CORRUG. IRON BUILDING.- NO HEATING.
PEPPER BONDED W. HO. CAPCY. 400 BBLS., PARTLY RACKED. - BRICK BLDG. METAL RF. & SHUTTERS. - NO HEATING.
WHITESTONE, SLOCUM, CENTRAL & WILLIAMS W. HOS. BRICK BUILDINGS METAL & GRAVEL ROOF.- ALL OPENINGS IR. CLAD.
OCCUPIED FOR STORAGE PURPOSES ONLY. NO HEATING.- CLOSED LARD OIL LIGHTS.

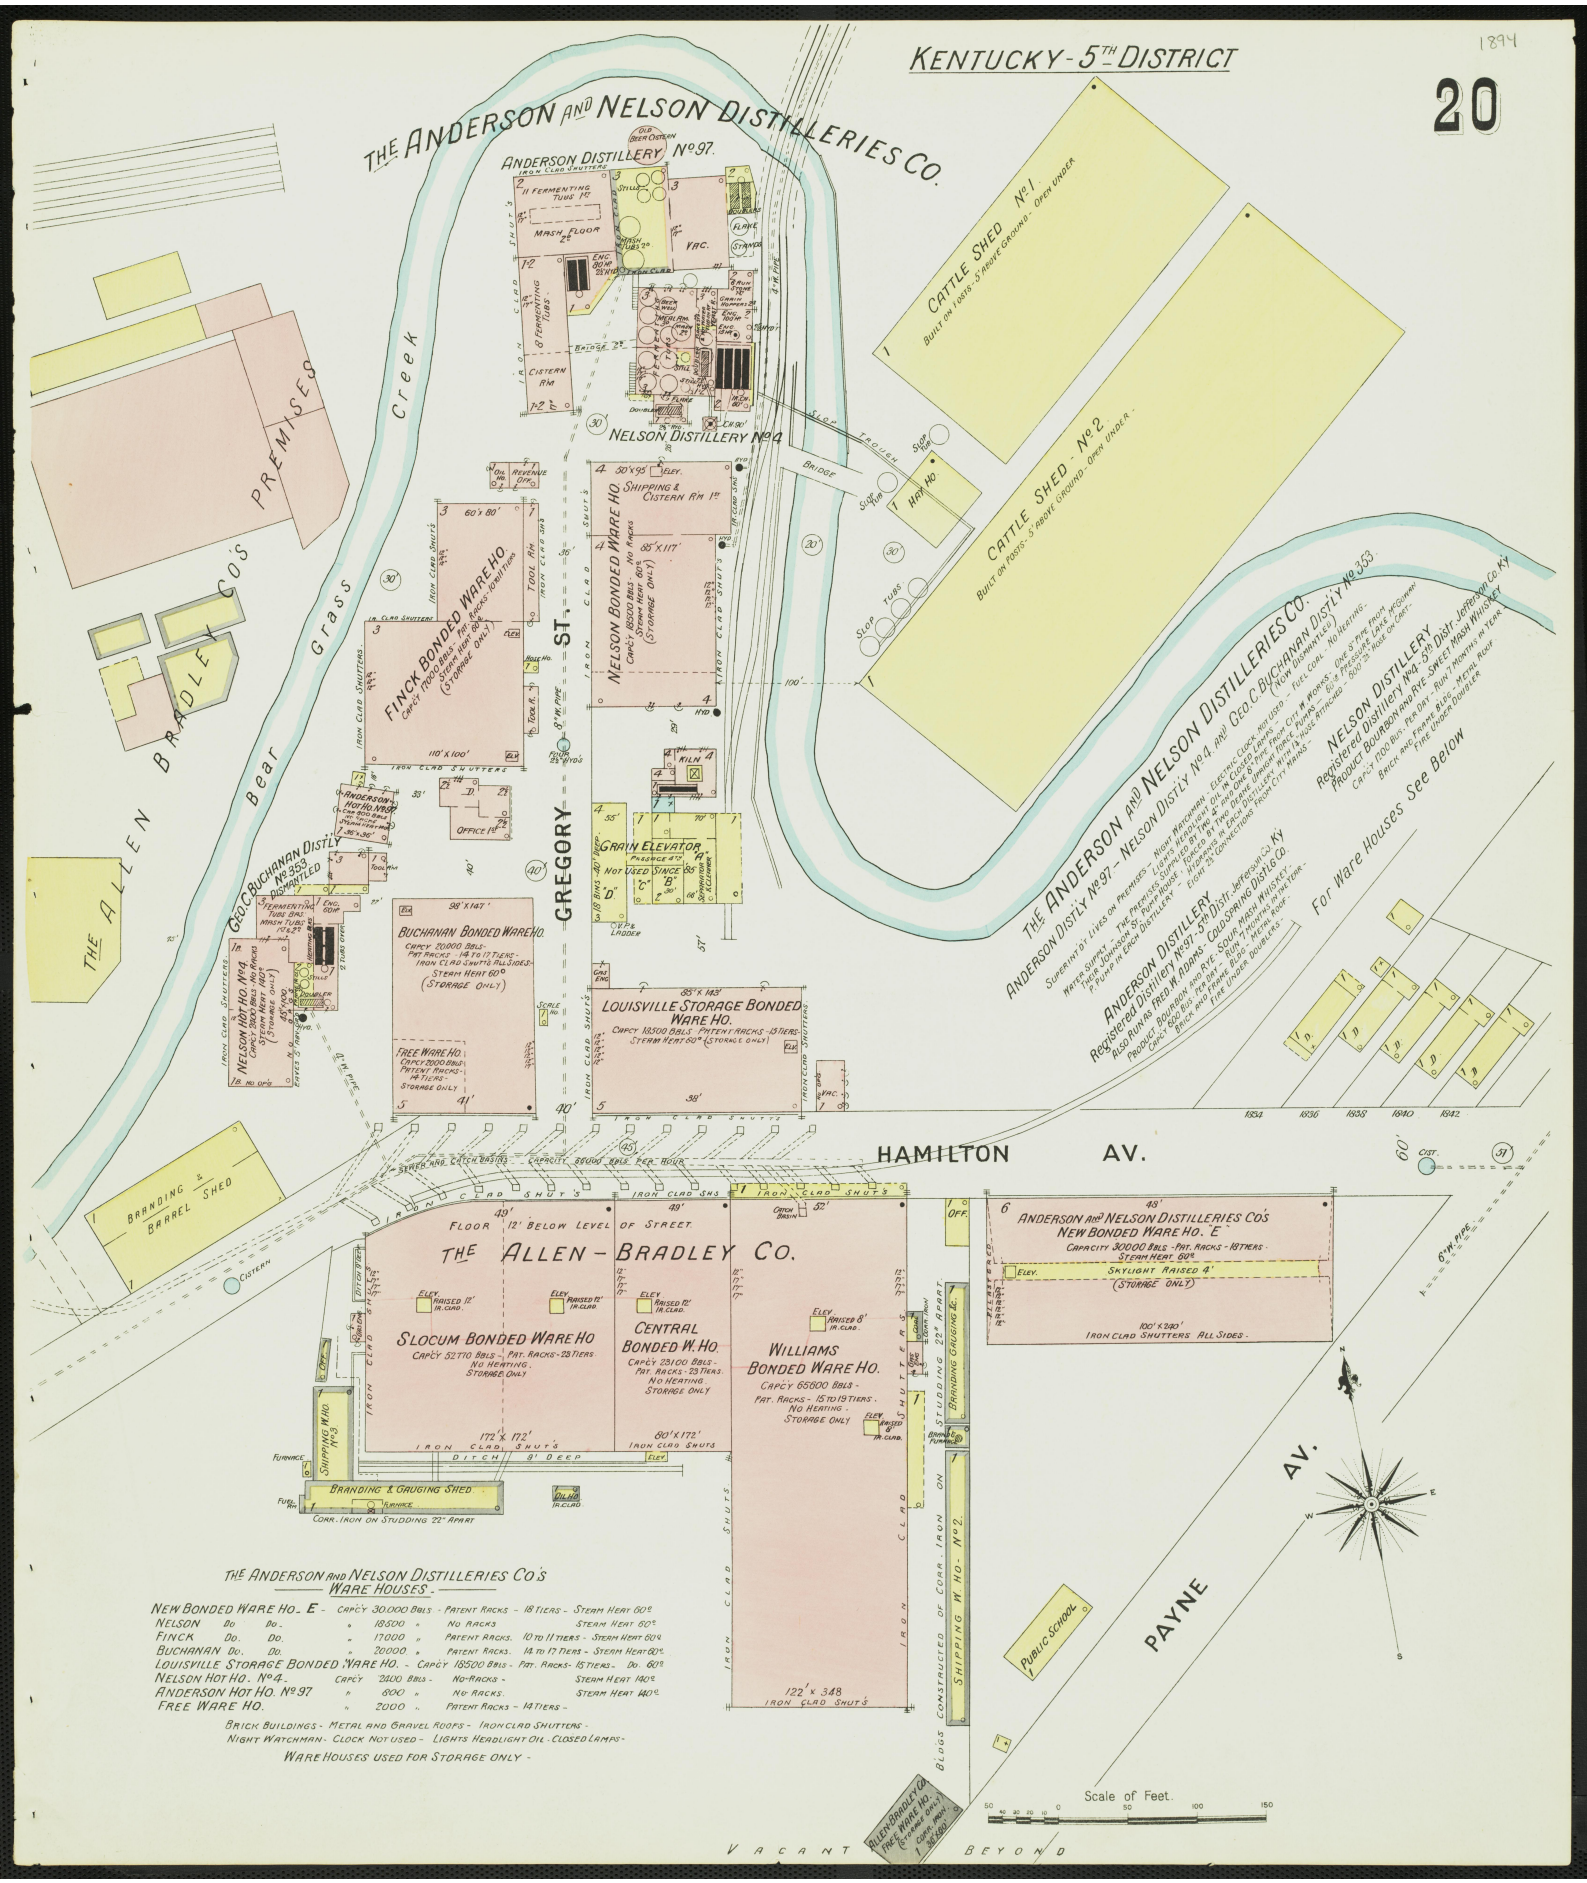

THE ANDERSON AND NELSON DISTILLERIES CO'S
WARE HOUSES -

NEW BONDED WARE HO. E -	CAPCY 30,000 BBLS. -	PATENT RACKS. -	18 TIERS -	STEAM HEAT 60°
NELSON Do. Do.	" 18500 "	NO RACKS		STEAM HEAT 60°
FINCK Do. Do.	" 17000 "	PATENT RACKS.	10 TO 11 TIERS -	STEAM HEAT 60°
BUCHANAN Do. Do.	" 20000 "	PATENT RACKS.	14 TO 17 TIERS -	STEAM HEAT 60°
LOUISVILLE STORAGE BONDED WARE HO. -	CAPCY 18500 BBLS -	PAT. RACKS -	15 TIERS -	Do. 60°
NELSON HOT HO. No 4.	CAPCY 2800 BBLS -	NO RACKS -		STEAM HEAT 140°
ANDERSON HOT HO. No 97	" 600 "	NO RACKS.		STEAM HEAT 140°
FREE WARE HO.	" 2000 "	PATENT RACKS -	14 TIERS -	

BRICK BUILDINGS - METAL AND GRAVEL ROOFS - IRON CLAD SHUTTERS -
NIGHT WATCHMAN - CLOCK NOT USED - LIGHTS HEADLIGHT OIL - CLOSED LAMPS -
WARE HOUSES USED FOR STORAGE ONLY -

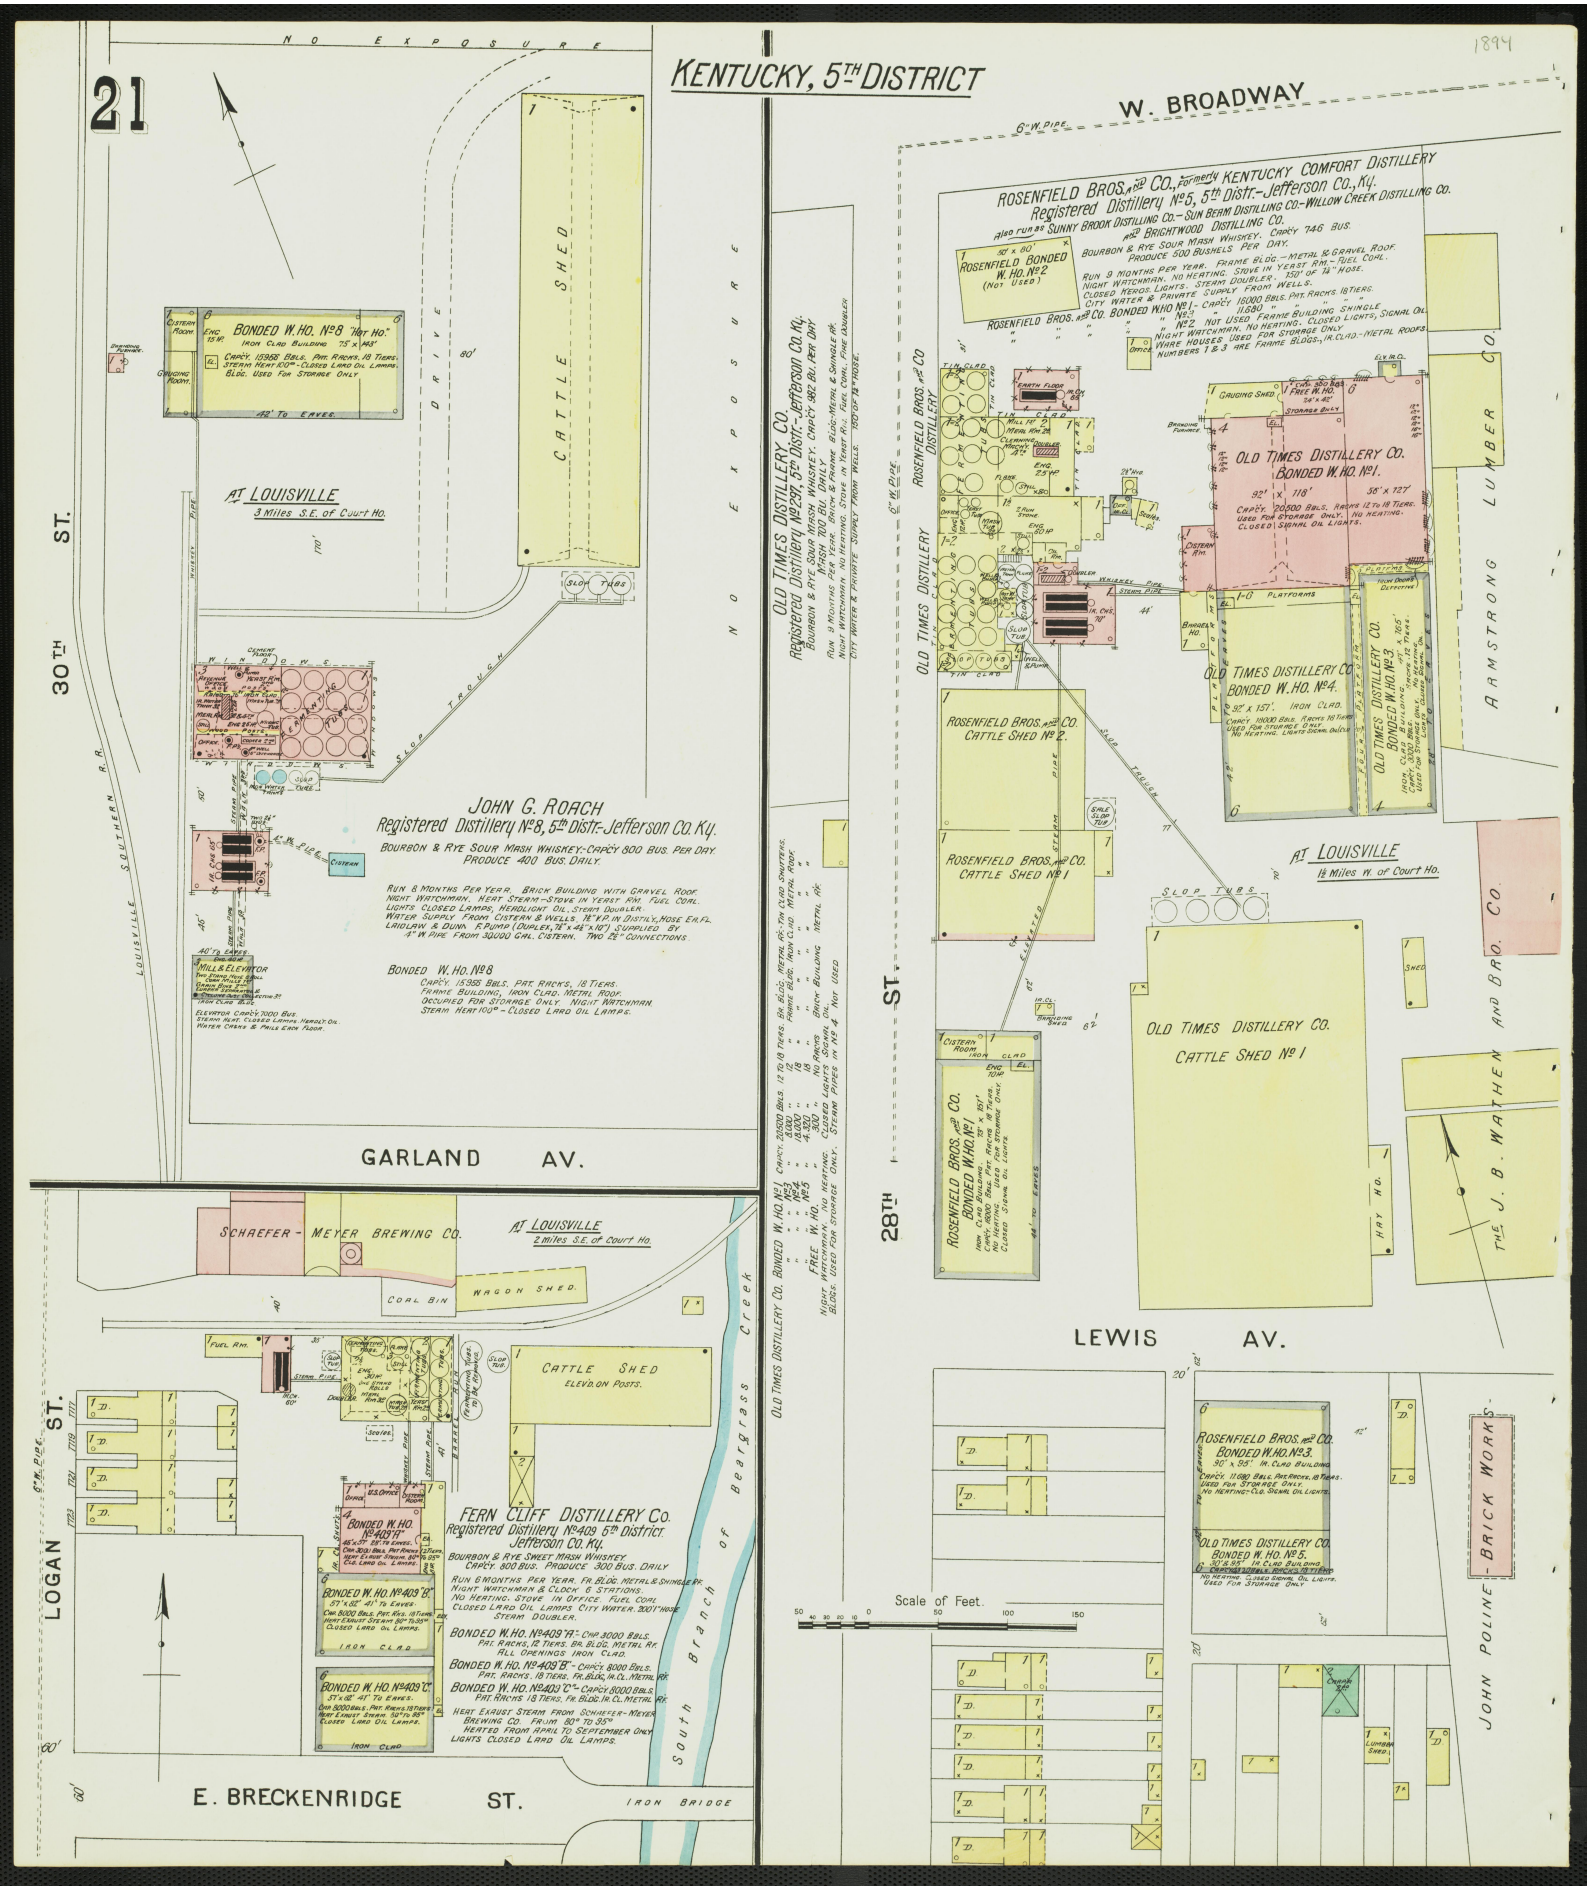
21
KENTUCKY, 5TH DISTRICT
1894
W. BROADWAY
NO EXPOSURE
CATTLE SHED
DRIVE
SLOP TROUGH
30TH ST.
LOUISVILLE SOUTHERN R.R.
AT LOUISVILLE
3 Miles S.E. of Court Ho.
BONDED W. HO. N°8 "Tilt Ho."
IRON CLAD BUILDING 75' x 143'
CAPCY. 13,952 BBLS. PAT. RACKS, 18 TIERS.
STEAM HEAT 150LBS. CLOSED LAMP OIL LAMPS.
BLDG. USED FOR STORAGE ONLY
42' TO EAVES
JOHN G. ROACH
Registered Distillery N°8, 5th Distr. Jefferson Co. Ky.
BOURBON & RYE SOUR MASH WHISKEY: CAPCY 800 BUS. PER DAY.
PRODUCE 400 BUS. DAILY.
RUN 8 MONTHS PER YEAR. BRICK BUILDING WITH GRAVEL ROOF.
NIGHT WATCHMAN. HEAT STEAM - STOVE IN YEAST RM. FUEL COAL
LIGHTS CLOSED LAMPS, HEROLIGHT OIL. STEAM DOUBLER.
WATER SUPPLY FROM CISTERN & WELLS. 16" P.P. IN DISTIL. HOSE 6 FT.
LAUDLEIN & DUNN. 6 PUMPS (DOUBLES, 28" x 42" x 10") SUPPLIED BY
4" W PIPE FROM 30,000 GAL. CISTERN. TWO 2½" CONNECTIONS.
CISTERN
BONDED W. HO. N°8
CAPCY. 14,388 BBLS. PAT. RACKS, 18 TIERS.
FRAME BUILDING, IRON CLAD. METAL ROOF.
OCCUPIED FOR STORAGE ONLY. NIGHT WATCHMAN.
STEAM HEAT 10LB. - CLOSED LAMP OIL LAMPS.
MILL & ELEVATOR
ELEVATOR CAPCY 7000 BUS.
STEAM HEAT. CLOSED LAMPS, HEROLIGHT OIL.
WATER CHAIN & PAILS EACH FLOOR.
GARLAND AV.
SCHAEFER - MEYER BREWING CO.
AT LOUISVILLE
2 Miles S.E. of Court Ho.
COAL BIN
WAGON SHED
CATTLE SHED
ELEVD. ON POSTS.
LOGAN ST.
6TH PIKE
FERN CLIFF DISTILLERY CO.
Registered Distillery N°409 5th District.
Jefferson Co. Ky.
BOURBON & RYE SWEET MASH WHISKEY
CAPCY. 800 BUS. PRODUCE 300 BUS. DAILY
RUN 6 MONTHS PER YEAR. FR. BLDG. METAL & SHINGLE RF.
NIGHT WATCHMAN & CLOCK & 6 STATIONS.
NO HEATING. STOVE IN OFFICE. FUEL COAL
CLOSED LARD OIL LAMPS CITY WATER. 300' HOSE
STEAM DOUBLER.
BONDED W. HO. N°409 "A" - CAP. 3000 BBLS.
PAT. RACKS, 12 TIERS. FR. BLDG. METAL RF.
ALL OPENINGS IRON CLAD.
BONDED W. HO. N°409 "B" - CAPCY. 8000 BBLS.
PAT. RACKS, 18 TIERS. FR. BLDG. IN CL. METAL RF.
BONDED W. HO. N°409 "C" - CAPCY. 8000 BBLS.
PAT. RACKS 18 TIERS. FR. BLDG. IN CL. METAL RF.
HEAT EXHUST STEAM FROM SCHAEFER-MEYER
BREWING CO. FAHR. 80° TO 95°
HEATED FROM APRIL TO SEPTEMBER ONLY.
LIGHTS CLOSED LARD OIL LAMPS.
BONDED W. HO. N°409 "A"
48' x 71' 88' IN CAPCE.
BONDED W. HO. N°409 "B"
57' x 62' 41' TO EAVES.
BONDED W. HO. N°409 "C"
57' x 62' 41' TO EAVES.
IRON CLAD
E. BRECKENRIDGE ST.
IRON BRIDGE
South Branch of Bearglass Creek
OLD TIMES DISTILLERY CO.
Registered Distillery N°239, 5th Distr. - Jefferson Co. Ky.
BOURBON & RYE SOUR MASH WHISKEY. CAPCY 382 BU. PER DAY
MASH 200 BU. DAILY.
RUN 3 MONTHS PER YEAR. BRICK & FRAME BLDG. METAL & SHINGLE RF.
NIGHT WATCHMAN. NO HEATING. STOVE IN YEAST RM. FUEL COAL. PINE DOUBLER
CITY WATER & PRIVATE SUPPLY FROM WELLS. 100' OF 1¾" HOSE.
OLD TIMES DISTILLERY CO. BONDED W. HO. N°1 CAPCY. 23,500 BBLS. 12 TO 18 TIERS. BR. BLDG. METAL RF. - TIN CLAD SHUTTERS.
" " " N°2 " 10,000 " 12 " " FRAME BLDG. IRON CLAD. METAL ROOF. " " "
" " " N°3 " 10,000 " 12 " " " " " " " " "
" " " N°4 " 41,300 " 18 " " " " " " " " "
FREE W. HO. " 300 " NO RACKS " BRICK BUILDING METAL RF.
NIGHT WATCHMAN. NO HEATING. CLOSED LARD OIL LAMPS. NOT USED
BLDGS. USED FOR STORAGE ONLY. STEAM PIPES IN N°s 1 & 4
28TH ST.
ROSENFIELD BROS. & CO., Formerly KENTUCKY COMFORT DISTILLERY
Registered Distillery N°5, 5th Distr. - Jefferson Co., Ky.
ALSO RUN AS SUNNY BROOK DISTILLING CO. - SUN BEAM DISTILLING CO. - WILLOW CREEK DISTILLING CO.
AND BRIGHTWOOD DISTILLING CO.
BOURBON & RYE SOUR MASH WHISKEY. CAPCY 746 BUS.
PRODUCE 500 BUSHELS PER DAY.
RUN 9 MONTHS PER YEAR. FRAME BLDG. - METAL & GRAVEL ROOF.
NIGHT WATCHMAN. NO HEATING. STOVE IN YEAST RM. - FUEL COAL.
CLOSED KEROS. LIGHTS. STEAM DOUBLER. 350' OF 1¾" HOSE.
CLOSED KEROS. & PRIVATE SUPPLY FROM WELLS.
CITY WATER & PRIVATE SUPPLY FROM WELLS. NIGHT WATCHMAN. 18 TIERS. PAT. RACKS.
ROSENFIELD BROS. & CO. BONDED W. HO. N°1 - CAPCY 11,000 BBLS. PAT. RACKS.
" " " N°2 - " 11,000 " " " "
NIGHT WATCHMAN. NO HEATING. STOVE IN YEAST RM. FUEL COAL. PINE DOUBLER
WARE HOUSES USED FOR STORAGE ONLY. NO HEATING. CLOSED LAMPS.
NUMBERS 1 & 3 ARE FRAME BLDGS. - IN CLAD. - METAL ROOFS
NUMBERS 2 & 4 ARE BRICK BLDGS. - IN CLAD. - METAL ROOFS
ROSENFIELD BONDED W. HO. N°2 (NOT USED) 90' x 90'
ROSENFIELD BROS. & CO. BONDED W. HO. N°1 - CAPCY 11,000 BBLS.
" " " N°2 - " 11,000 " "
NIGHT WATCHMAN. NO HEATING. CLOSED FOR STORAGE ONLY.
WARE HOUSES USED FOR STORAGE ONLY. NO HEATING. CLOSED LAMPS.
NUMBERS 1 & 3 ARE FRAME BLDGS. - IN CLAD. - METAL ROOFS
NUMBERS 2 & 4 ARE BRICK BLDGS. - IN CLAD. - METAL ROOFS
ROSENFIELD BROS. & CO. CATTLE SHED N°2.
ROSENFIELD BROS. & CO. CATTLE SHED N°1
OLD TIMES DISTILLERY CO. BONDED W. HO. N°1.
92' x 118' 38' x 127'
CAPCY. 20,000 BBLS. RACKS 12 TO 18 TIERS.
USED FOR STORAGE ONLY. NO HEATING.
CLOSED SIGNAL OIL LIGHTS.
OLD TIMES DISTILLERY CO. BONDED W. HO. N°3.
IRON CLAD BUILDING 92' x 105'
USED FOR STORAGE ONLY. NO HEATING.
OLD TIMES DISTILLERY CO. BONDED W. HO. N°4.
92' x 157' IRON CLAD.
CAPCY 11000 BBLS. RACKS 18 TIERS.
USED FOR STORAGE ONLY.
NO HEATING. LIGHTS SIGNAL OILS.
AT LOUISVILLE
1½ Miles W. of Court Ho.
OLD TIMES DISTILLERY CO. CATTLE SHED N°1
ROSENFIELD BROS. & CO. BONDED W. HO. N°1
IRON CLAD BUILDING 90' x 95'
CAPCY. 6000 BBLS. PAT. RACKS. 18 TIERS.
NO HEATING. USED FOR STORAGE ONLY.
CLOSED LAMPS. NO LIGHTS.
LEWIS AV.
ROSENFIELD BROS. & CO. BONDED W. HO. N°3.
90' x 95' IN. CLAD BUILDING
CAPCY. 11,000 BBLS. PAT. RACKS, 18 TIERS.
USED FOR STORAGE ONLY.
NO HEATING - CLD. SIGNAL OIL LIGHTS.
OLD TIMES DISTILLERY CO. BONDED W. HO. N°5.
90' & 95' IN. CLAD BUILDING
CAPCY. 11,000 BBLS. PAT. RACKS, 18 TIERS.
NO HEATING. CLOSED SIGNAL OIL LIGHTS.
USED FOR STORAGE ONLY.
Scale of Feet.
50 40 30 20 10 0 50 100 150
ARMSTRONG LUMBER CO.
THE J. B. WATHEN AND BRO. CO.
JOHN POLINE - BRICK WORKS

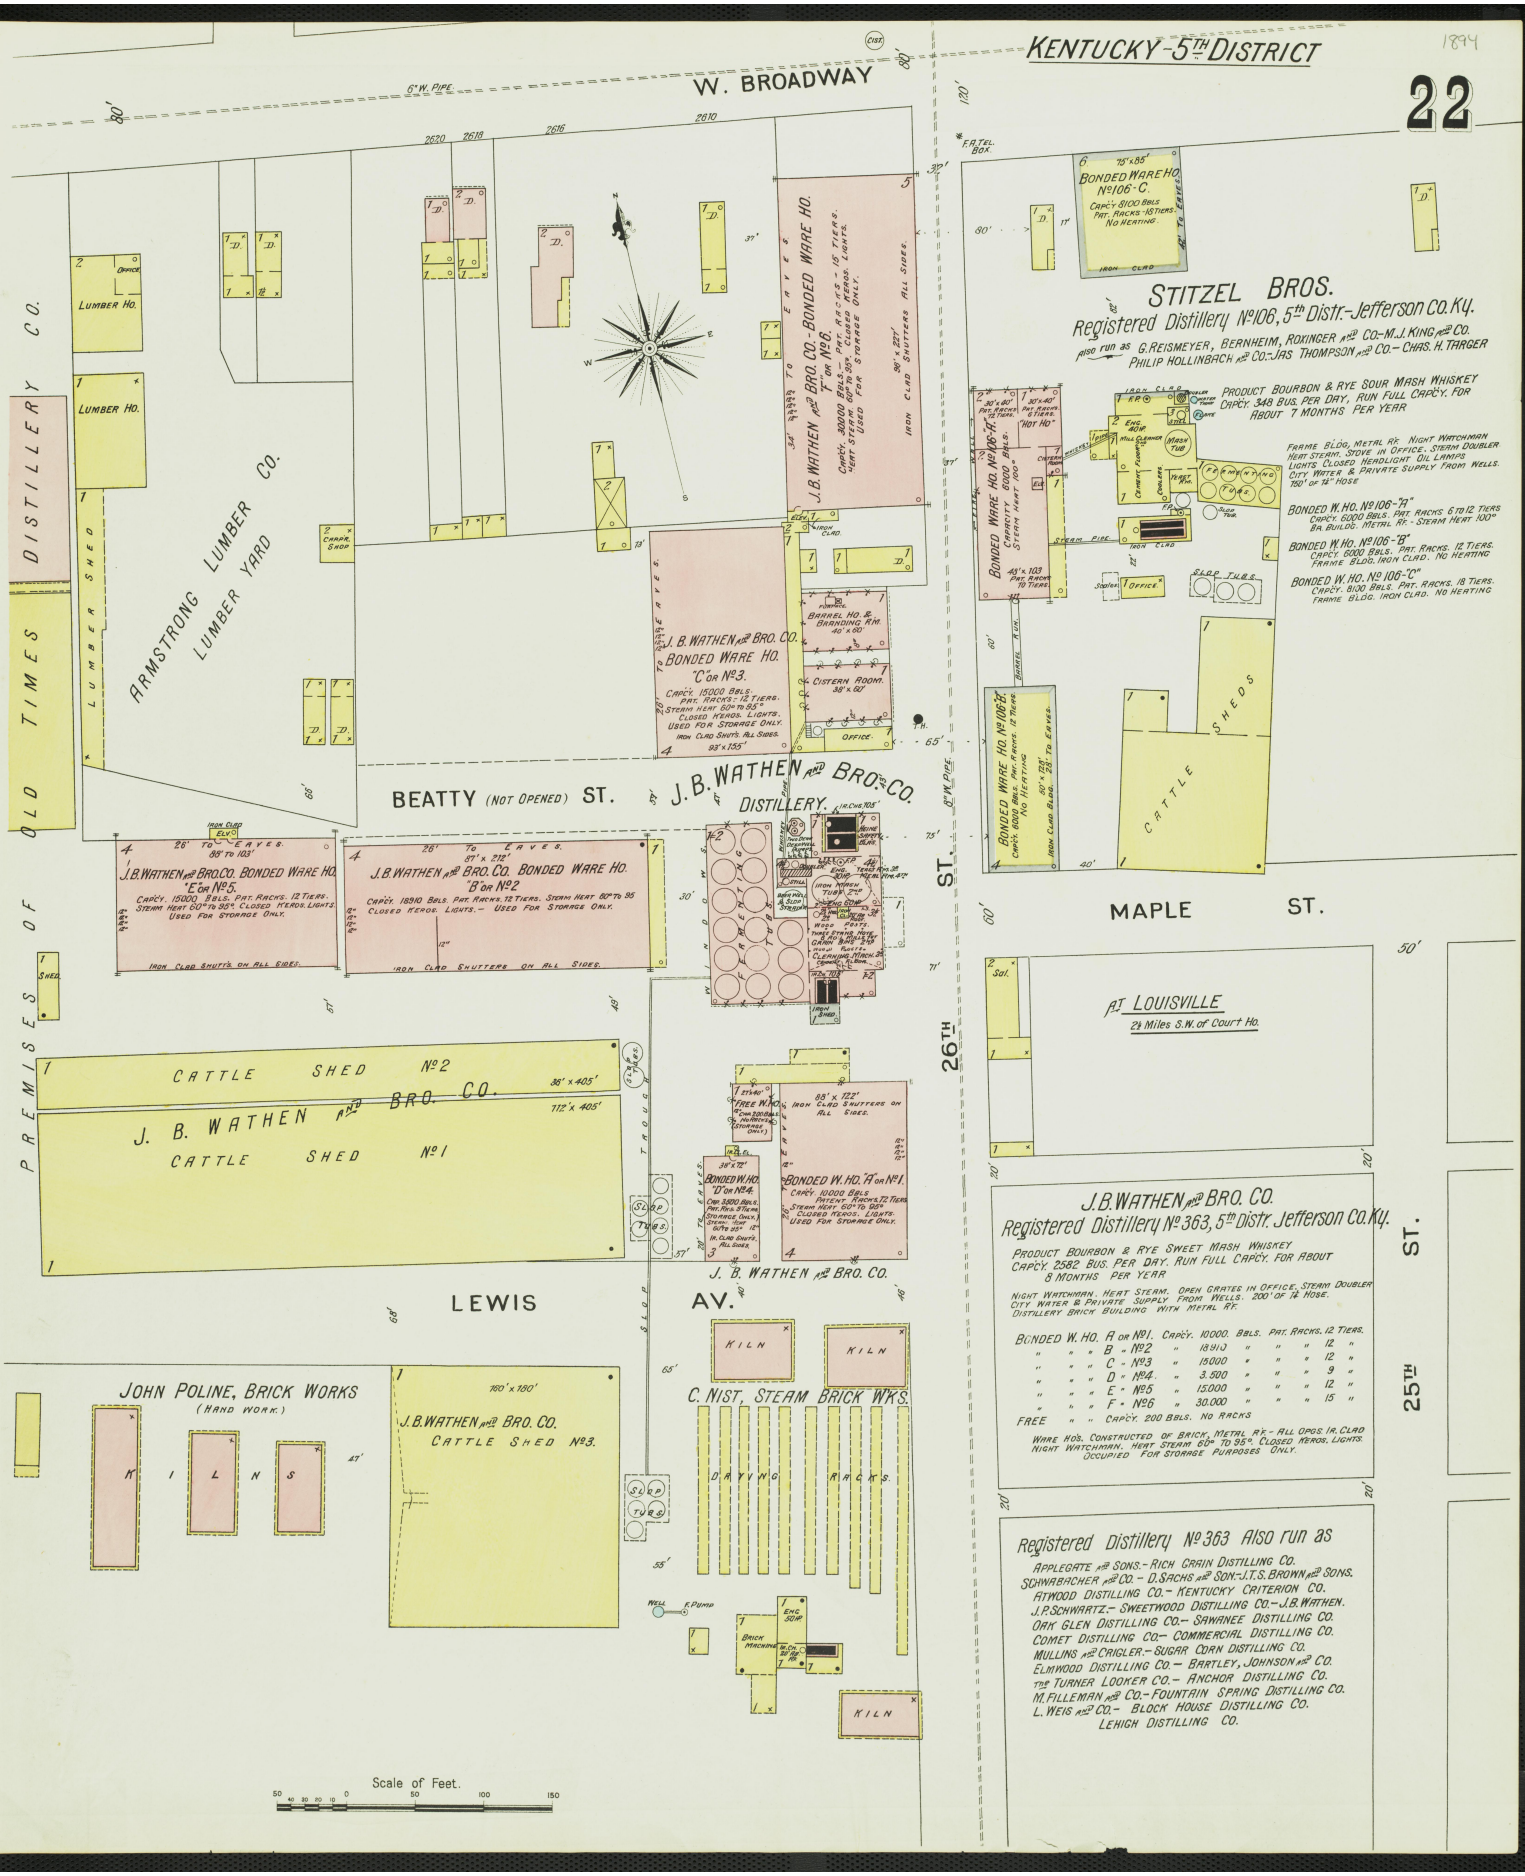
W. BROADWAY
6" W. PIPE
2620
2618
2616
2610
OLD TIMES DISTILLERY CO.
PREMISES OF
ARMSTRONG LUMBER CO. LUMBER YARD
LUMBER SHED
LUMBER HO.
OFFICE
CHARR. SHOP
J. B. WATHEN & BRO. CO. BONDED WARE HO. "F" OR No 6.
CAPCY. 30000 BBLS. PAT. RACKS - 10 TIERS. HEAT STEAM 60° TO 85°. CLOSED KEROS. LIGHTS. USED FOR STORAGE ONLY.
38' x 221'
IRON CLAD SHUTTERS ALL SIDES.
J. B. WATHEN & BRO. CO. BONDED WARE HO. "C" OR No 3.
CAPCY. 15000 BBLS. PAT. RACKS - 12 TIERS. STEAM HEAT 60° TO 85°. CLOSED KEROS. LIGHTS. USED FOR STORAGE ONLY.
IRON CLAD SHUTS. ALL SIDES.
93' x 155'
BARREL HO. & BRANDING RM. 40' x 60'
CISTERN ROOM. 38' x 60'
OFFICE
BEATTY (NOT OPENED) ST.
J. B. WATHEN & BRO. CO. DISTILLERY
J. B. WATHEN & BRO. CO. BONDED WARE HO. "E" OR No 5.
CAPCY. 15000 BBLS. PAT. RACKS. 12 TIERS. STEAM HEAT 60° TO 85°. CLOSED KEROS. LIGHTS. USED FOR STORAGE ONLY.
IRON CLAD SHUTTS ON ALL SIDES.
J. B. WATHEN & BRO. CO. BONDED WARE HO. "B" OR No 2
CAPCY. 18910 BBLS. PAT. RACKS. 12 TIERS. STEAM HEAT 60° TO 95°. CLOSED KEROS. LIGHTS. — USED FOR STORAGE ONLY.
IRON CLAD SHUTTERS ON ALL SIDES.
GRAIN ELEVATOR
IRON MASH TUB 2nd
WOOD MASH TUB 2nd
CLEANING MACH. 2nd
IRON MASH TUB 1st
CLEANING MACH. 1st
IRON SHED
SHED
CATTLE SHED No 2
36' x 405'
J. B. WATHEN & BRO. CO.
112' x 405'
CATTLE SHED No 1
FREE W. HO.
85' x 122'
IRON CLAD SHUTTERS ON ALL SIDES.
BONDED W. HO. "D" OR No 4.
CAPCY. 3800 BBLS. PAT. RACKS. 3 TIERS. STEAM HEAT 60° TO 85°. STORAGE ONLY. IRON CLAD SHUTTS. ALL SIDES.
BONDED W. HO. "A" OR No 1.
CAPCY. 10000 BBLS. PATENT RACKS. 12 TIERS. STEAM HEAT 60° TO 90°. CLOSED KEROS. LIGHTS. USED FOR STORAGE ONLY.
J. B. WATHEN & BRO. CO.
LEWIS AV.
SLOP TROUGH
JOHN POLINE, BRICK WORKS (HAND WORK.)
KILNS
160' x 160'
J. B. WATHEN & BRO. CO. CATTLE SHED No 3.
KILN
KILN
C. NIST, STEAM BRICK WKS.
DRYING RACKS
SLED TUBS
WELL
F. PUMP
ENG. & SCRP
BRICK MACHINE
KILN
Scale of Feet.
50 40 30 20 10 0 50 100 150
BONDED WARE HO. No 106 - C.
CAPCY. 5100 BBLS. PAT. RACKS - 15 TIERS. NO HEATING.
IRON CLAD
STITZEL BROS.
Registered Distillery No 106, 5th Distr. - Jefferson Co. Ky.
ALSO run as G. REISMEYER, BERNHEIM, ROXINGER & Co. - M. J. KING & Co.
PHILIP HOLLINBACH & Co. - JAS THOMPSON & Co. - CHAS. H. TARGER
PRODUCT BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 348 BUS. PER DAY, RUN FULL CAPCY. FOR ABOUT 7 MONTHS PER YEAR
FRAME BLDG. METAL RF. NIGHT WATCHMAN HEAT STEAM. STOVE IN OFFICE. STEAM DOUBLER CITY WATER & PRIVATE SUPPLY FROM WELLS. 200' OF 12" HOSE
BONDED W. HO. No 106 - "A" CAPCY. 6000 BBLS. PAT. RACKS. 6 TO 12 TIERS BA. BUILDG. METAL RF. - STEAM HEAT 100°
BONDED W. HO. No 106 - "B" CAPCY. 6000 BBLS. PAT. RACKS. 12 TIERS. FRAME BLDG. IRON CLAD. NO HEATING
BONDED W. HO. No 106 - "C" CAPCY. 8100 BBLS. PAT. RACKS. 18 TIERS. FRAME BLDG. IRON CLAD. NO HEATING
BONDED WARE HO. No 106 - "A"
CAPCY. 6000 BBLS. PAT. RACKS. 12 TIERS. STEAM HEAT 100°
"HOT HO"
BONDED WARE HO. No 106 - "B"
CAPCY. 6000 BBLS. PAT. RACKS. 12 TIERS. NO HEATING
IRON CLAD BLDG. 23' TO EAVES.
MASH TUB
COOLERS
CEMENT FERMENTERS
ENG. ROOM
BOILER
WATER HEATER
STEAM PIPE
STABLE
OFFICE
SLOP TUBS
SHEDS
CATTLE
MAPLE ST.
AT LOUISVILLE
2½ Miles S.W. of Court Ho.
J. B. WATHEN & BRO. CO.
Registered Distillery No 363, 5th Distr. Jefferson Co. Ky.
PRODUCT BOURBON & RYE SWEET MASH WHISKEY
CAPCY. 2582 BUS. PER DAY. RUN FULL CAPCY. FOR ABOUT 8 MONTHS PER YEAR
NIGHT WATCHMAN. HEAT STEAM. OPEN GRATES IN OFFICE. STEAM DOUBLER CITY WATER & PRIVATE SUPPLY FROM WELLS. 200' OF 12" HOSE. DISTILLERY BRICK BUILDING WITH METAL RF.
BONDED W. HO. A OR No 1. CAPCY. 10000. BBLS. PAT. RACKS. 12 TIERS.
" " " B " No 2 " 18910 " " " " 12 "
" " " C " No 3 " 15000 " " " " 12 "
" " " D " No 4. " 3.500 " " " " 9 "
" " " E " No 5 " 15000 " " " " 12 "
" " " F " No 6 " 30.000 " " " " 15 "
FREE " " CAPCY. 200 BBLS. NO RACKS
WARE HOS. CONSTRUCTED OF BRICK, METAL RF. - ALL OPGS IR. CLAD NIGHT WATCHMAN. HEAT STEAM 60° TO 95°. CLOSED KEROS. LIGHTS. OCCUPIED FOR STORAGE PURPOSES ONLY.
Registered Distillery No 363 Also run as
APPLEGATE & SONS. - RICH GRAIN DISTILLING CO.
SCHWABACHER & CO. - D. SACHS & SON. - J.T.S. BROWN & SONS.
ATWOOD DISTILLING CO. - KENTUCKY CRITERION CO.
J.P. SCHWARTZ. - SWEETWOOD DISTILLING CO. - J.B. WATHEN.
OAK GLEN DISTILLING CO. - SAWANEE DISTILLING CO.
COMET DISTILLING CO. - COMMERCIAL DISTILLING CO.
MULLINS & CRIGLER. - SUGAR CORN DISTILLING CO.
ELMWOOD DISTILLING CO. - BARTLEY, JOHNSON & CO.
THE TURNER LOOKER CO. - ANCHOR DISTILLING CO.
M. FILLEMAN & CO. - FOUNTAIN SPRING DISTILLING CO.
L. WEIS & CO. - BLOCK HOUSE DISTILLING CO.
LEHIGH DISTILLING CO.
26TH ST.
25TH ST.

KENTUCKY, 5th DISTRICT

23

VACANT FIELDS

J. L. LEE formerly N. W. LEE
Registered Distillery No 20, 5th Distr. Owen Co. Ky.

PRODUCTION BOURBON SOUR MASH WHISKEY
CAPCY. 22 BUS. PER DAY - RUN 4 MONTHS PER YEAR.

STONE & FRAME BUILDING - SHINGLE ROOF
NO WATCHMAN. - FIRE DOUBLER
NO LIGHTS. NO FIRE APPS.
NO HEATING.

J. L. LEE BONDED WARE HO.
CAPCY. 120 BBLS. NO RACKS.
FRAME BLDG. IR. CLAD. METAL ROOF.

N. W. LEE BONDED WARE HO.
CAPCY. 120 BBLS. NO RACKS.
FRAME BUILDG. SHINGLE ROOF.
NO WATCHMAN. NO HEATING. NO LIGHTS

DISTILLERY

Situated 17 Miles S.E. of OWENTON and 7½ Miles W. of CORINTH KY.

BRANCH

ROAD

VACANT

AT CALVARY
4½ Miles S. of LEBANON KY.

BONDED WARE HO. No 370-4
CAPCY. 7888 BBLS. PAT. RACKS - 11 TIERS
OCCUPIED FOR STORAGE ONLY
60' x 150'
IRON CLAD BUILDING
23' TO EAVES
ELEVATION 45' ABOVE DISTILLERY

BOLDRICK AND CALLAGHAN CO.
formerly BOLDRICK and CALLAGHAN
Registered Distillery No 370, 5th Distr. Marion Co. Ky.
Also runs as GEO. D. BOLDRICK — FRANK CALLAGHAN —

PRODUCTION BOURBON & RYE HAND MADE SOUR MASH WHISKEY
CAPCY. 300 BUS. PER DAY. RUN 6 MONTHS PER YEAR.

BRICK BUILDING. - GRAVEL ROOF.
NO WATCHMAN. - FUEL COAL
HEAT OPEN GRATE IN YEAST ROOM AND STOVE IN OFFICE. STEAM DOUBLER.
LIGHTS KEROSENE LANTERNS
WATER SUPPLY FROM WELLS. 100' 1¼" HOSE.

STEEP HILLSIDE

BONDED WARE HO. No 370-1
CAPCY. 7888 BBLS. PAT. RACKS - 9 TIERS.
OCCUPIED FOR STORAGE ONLY
42' x 150'
IRON CLAD BUILDING - 20' TO EAVES
42' x 100'
FREE W. HO.
CAPCY. 1500 BBLS.
PAT. RACKS 9 TIERS
OFFICE ONLY
20' x 50'

BONDED WARE HO. No 370-2
IRON CLAD BUILDING - 20' TO EAVES
CAPCY. 5000 BBLS. PAT. RACKS - 9 TIERS.
OCCUPIED FOR STORAGE ONLY.
45' x 150'
UNPROTECTED VENTILATING OPENINGS ALL SIDES.

45' x 75'
BONDED W. HO. No 370-3
CAPCY. 2500 BBLS.
PAT. RACKS 9 TIERS
(STORAGE ONLY)
IRON CLAD
UNPROTECTED VENT. OPG. ALL SIDES.
20' TO EAVES.

SLOP TROUGH

1 HAY HO.

SLOP TUBS

1 CATTLE SHED

DISTILLERY
GRAIN FLOOR 3rd STORY 15' HIGH
FERMENTING TUBS.
MASH FLOOR 2nd STORY 15' HIGH
MASH TUBS.
GRIST FLOOR 1st STORY 15' HIGH
GRIST MILL
STEAM ENGINE
BOILER
STEAM PIPES IN THIS ROOM ONLY
CISTERN ROOM IR. CLAD
BRANDING SHED
WATER TANK
1 OFFICE
IRON CLAD
HOT & COLD WATER TANKS 375 GAL.
4" WATER PIPE FROM WELLS
RUSSELL RUN
MILL RACE
L. & N. R. R.

WARE HOUSES

BONDED WARE HO. No 370-1		CAPCY. 7888 BBLS. PAT. RACK TIERS.			No HEATING
Do	Do.	No 370-2	" 5000	" 9	" "
Do	Do	No 370-3	" 2500	" 9	" "
Do	Do	No 370-4	" 7380	" 11	" FOR HEAT SEE BELOW.
FREE	Do.	—	" 1500	" 9	" No HEATING

FRAME BUILDINGS, IRON CLAD METAL ROOFS USED FOR STORAGE ONLY.
NO WATCHMAN. - EAST RM. IN No 370-4 HEATED OCCASIONALLY WHEN RUNNING TO 70°F.
LIGHTS CANDLES. - ONE 3 GAL. MEYROSE CHEMICAL FIRE EXTINGR. IN EACH BUILDING.

B. F. MATTINGLY
Registered Distillery No 14, 5th District, Marion Co., Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY.
CAPCY 200 BUS. & PRODUCE ABOUT 100 BUS. PER DAY.
RUN 6 MONTHS PER YEAR.

FRAME BUILDING. SHINGLE ROOF.
TO HAVE NIGHT WATCHMAN.
NO HEATING. CLOSED KEROSENE LIGHTS.
FUEL WOOD. FIRE UNDER DOUBLER
WATER SUPPLY FROM WELLS. 50' 1" HOSE.

BONDED WARE HO.
CAPCY. 300 BARRELS. NO RACKS
FRAME BUILDING. SHINGLE ROOF
NO HEATING. - NO LIGHTS. -

Situated 6 Miles W. of LEBANON and 1⅞ Miles S.W. of ST. MARYS KY.

DISTILLERY
OFFICE
DRY KILN
BEING BUILT
MILL FLOOR
GRIST FLOOR
FERMENTING
GRAIN FLOOR
MASH FLOOR
GRIST MILL
STEAM ENGINE
BOILER
IRON WATER CISTERN ON STAGING
WHISKEY PIPE
SLOP TROUGH ON TRESTLES
344'
SLOP TUB
BOND WARE
1 CATTLE SHED
BONDED W. HO.
CAPCY. 300 BBLS.
NO RACKS
20' x 35'
CISTERN ROOM
25' TO FRAME COOPER SHOP (20' x 25')
105'

Scale of Feet.
50 40 30 20 10 0 50 100 150

VACANT FIELDS
VACANT FIELDS

1894

24

KENTUCKY 5TH DISTRICT

P.O. CLEREMONT KY.
14 Miles N.W. of BARDSTOWN KY.

BONDED WARE HO. No4. CAPCY 4800 BBLS - PAT. RACKS - 10 TIERS - USED FOR STORAGE ONLY -

BONDED WARE HO. No3. CAPCY 3350 BBLS - PAT. RACKS - 10 TIERS -

BONDED WARE HO. No2. CAPCY 3000 BBLS - PAT. RACKS - 10 TIERS -

BARREL SHED No1. IRON CLAD

WHISKEY PIPE

SLOP TROUGH

SCATTERED PILES OF CORD WOOD

DISTILLERY

CORN CRIB

MURPHY AND BARBER
Registered Distillery No401. - 5th Distr. Bullitt Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 154 BUSHELS PER DAY - RUN 6 TO 8 MONTHS OF YEAR -
FRAME BUILDING-SHINGLE AND METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS, CANDLES - HEAT, STOVES IN YEAST RM. AND OFFICE - FUEL WOOD - 50' 1¼ HOSE

PLATFORM

L. & N. R. R.

COOPER SHOP

BONDED WARE HO. No2. CAPCY 3000 BBLS - PAT. RACKS - 10 TIERS -
Do. Do. No3. " 3000 " " " 10 "
Do. Do. No4. " 4000 " " " 10 "
FRAME BUILDING - IRON CLAD - METAL ROOF - NO WATCHMAN - NO HEATING - LIGHTS, CLOSED HEADLIGHT OIL LAMPS AND CANDLES - WARE NOS. USED FOR STORAGE ONLY -

VACANT

Situated Near DEATSVILLE KY.
9 Miles N.W. of BARDSTOWN KY.

BONDED WARE HO. "A" CAPCY 6200 BBLS - PAT. RACKS - 6 TO 10 TIERS - USED FOR STORAGE ONLY -

BONDED WARE HO. "D" CAPCY 4200 BBLS - PAT. RACKS - 10 TO 12 TIERS - USED FOR STORAGE ONLY - 54' x 100' IRON CLAD BLDG - 22' TO EAVES

CISTERN RM.

IRON CLAD BLDG - 68' x 148' - 21' TO EAVES

HE. COOPERAGE

WHISKEY PIPE

SLOP TROUGH

CATTLE SHED 150' LONG

T. W. SAMUELS
Registered Distillery No145 - 5th Distr. Nelson Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 215 BUSHELS PER DAY - PRODUCE 110 BUSHELS PER DAY - RUN 8 MONTHS OF YEAR -
FRAME BUILDING, METAL ROOF - DOUBLER RUN BY FIRE AND EXHAUST STEAM - NO WATCHMAN - MAN SLEEPS IN BUILDING - CLOSED KEROSENE LIGHTS - HEAT STOVE IN YEAST RM AND OFFICE - FUEL COAL AND WOOD - 100' 1¼ HOSE -

BONDED WARE HO. "A" CAPCY 6200 BBLS - PAT. RACKS - 6 TO 10 TIERS -
Do. Do. "D" " 4500 " " " 10 TO 12 "
FRAME BUILDINGS - IRON CLAD - METAL ROOF - NO WATCHMAN - NO HEATING - LIGHTS, CANDLES - WARE NOS. USED FOR STORAGE ONLY -

SLOP TUB

CISTERN

PUMPING ENGINE

DOUBLER

MASH FLOOR & FERMENTING TUBS

CLOSED TUBS

SOUR MASH R. 2d

STILL

FLUME

LEACH

DRY HOUSE

DRY

SHED

BLKSM.

DISTILLERY

SHED

NO EXPOSURE

NO EXPOSURE

BARBER AND FERREILL AND R. B. HAYDEN AND CO.
Registered Distillery No420. - 5th Distr. Bullitt Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 100 BUSHELS PER DAY - RUN 7 MONTHS OF YEAR -
FRAME BUILDING - METAL & SHINGLE ROOF - FIRE UNDER DOUBLER
NO WATCHMAN - LIGHTS CANDLES - HEAT STOVE IN YEAST RM. & OFFICE - FUEL COAL & WOOD - 50' 1¼ HOSE

BONDED WARE HO. CAPCY 3350 BBLS - PAT. RACKS - 10 TIERS - FRAME BUILDING - IR. CLAD - METAL ROOF - NO WATCHMAN - NO HEATING - LIGHTS, CANDLES - WARE HO. USED FOR STORAGE ONLY -

BONDED WARE HO. CAPCY 3350 BBLS - PAT. RACKS - 10 TIERS - USED FOR STORAGE ONLY - 48' x 100' IR. CLAD BLDG - 22' TO EAVES

CISTERN RM.

L. & N. R. R.

WHISKEY PIPE

COOPER SHOP

BARREL SHED

COOPER SHOP

SOUR MASH R. 3d

FLUME

DOUBLER

STILL

WHISKEY

1 RUN STONE

ENG.

FURNACE CLEANER

CHIMNEY BENCH

FUEL TUB

DISTILLERY

P.O. HOBBS STATION
12 Miles N.W. of BARDSTOWN KY.

SLOP TROUGH

HAY SHED

SLOP TUB

CATTLE SHED

CATTLE SHED

B L O O K

V A C A N T

P.O. CHAPEZE STATION
15 Miles N.W. of BARDSTOWN KY.

35' TO COOPER SHOP

SHED

BONDED WARE HO. CAPCY 6400 BBLS - PAT. RACKS - 10 TIERS - USED FOR STORAGE ONLY - 48' x 100' IR. CLAD BLDG - 22' TO EAVES

CISTERN RM.

CORN CRIB

L. & N. R. R.

GRANARY

ENGINE

STONE FOR FLUE

BOILER

CHIMNEY

MASH FLOOR & FERMENTING TUBS

DISTILLERY

B. CHAPEZE
Registered Distillery No266. - 5th Distr. Bullitt Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 82 BUSHELS PER DAY - RUN 5 MONTHS OF YEAR -
FRAME BUILDING SHINGLE ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - CLOSED KEROSENE LIGHTS - HEAT STOVE IN YEAST ROOM AND OFFICE - FUEL WOOD - 50' 1¼" HOSE -

OFFICE

CATTLE SHED

CATTLE SHED

BONDED WARE HO CAPCY 4400 BBLS - PATENT RACKS - 10 TIERS - FRAME BUILDING - IRON CLAD - METAL ROOF - NO WATCHMAN - NO HEATING - LIGHTS CANDLES - WARE NO. USED FOR STORAGE ONLY -

Scale of Feet.

50 30 20 10 0 50 100 150

V A C A N T

25

KENTUCKY - 5TH DISTRICT

1894

SPRINGFIELD BRANCH - L. & N. R. R.

About 3/4 Mile

PLATFORM

BONDED WARE HOUSES OF EARLY TIMES DISTILLING CO. No 276.
CAPCY 4000 BBLS - PAT. RACKS IN STONE BLDG - 9 TIERS -

STONE AND FRAME BLDG - METAL ROOF -
NO WATCHMAN - NO HEATING - LIGHTS CANDLES -
USED FOR STORAGE ONLY -
No Exposures.

EARLY TIMES DISTILLERY CO.

Registered Distillery, No 7 - 5th Distr. Nelson Co. KY

ALSO RUN AS:
JOHN H. BEAM - G.H. HARBERS & CO. - FRIEDMAN KUHN & CO.
HARTMAN & ROBINSON - WRIGHT & TAYLOR - MORRIS, POWERS & CO.
OLD TURK DISTILLING CO. - MAYER, KUHN & FRIEDBURG - A.G. NALL.

PRODUCT - BOURBON SOUR AND SWEET MASH WHISKEY
CAPCY 600 BUS. PER DAY - RUN 7 MONTHS IN YEAR -
FRAME BLDG - PARTLY IRONCLAD - METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - FUEL COAL - LIGHTS CLOSED KEROSENE LAMPS - HEAT STOVE IN YEAST RM.
WATER SUPPLY FROM SPRING AND CREEK - 100' 1¾" HOSE -
TWO LAIDLAW & DUNN PUMPS - 5" SUCTION - 4" DISCHARGE -

BONDED WARE HO - A. - CAPCY 10000 BBLS - PAT. RACKS - 15 TIERS -
DO. DO. B. " 3600 " " " 9 TO 10 TIERS
DO. DO. C. " 12000 " " " 16 TIERS.
FREE DO. F. " 500 " NO RACKS - NO HEATING.
FRAME BLDGS - IRON CLAD - METAL ROOF -
BONDED WARE HOUSES HEATED BY STEAM OCCASLY - WHEN RUNNING 70°
NO WATCHMAN - LIGHTS CLOSED KEROSENE LAMPS -
WARE HOUSES USED FOR STORAGE ONLY -

Situated at
EARLY TIMES STATION
3 Miles East of BARDSTOWN.

TWO 4" W. PIPES FROM PUMP HO. 450' DISTANT

SLOP TROUGH TO CATTLE SHED 400' DISTANT

FRAME SHED 10'X 60' GRAVEL ROOF - DETACHED -

Simpson Creek

THE ASHTON DISTILLING CO. - B. McCLASKEY & SON

FORMERLY BROOKS & McCLASKEY
Registered Distillery No 442 - 5th Distr. Nelson Co. KY
PRODUCT - BOURBON SOUR MASH WHISKEY.
CAPCY 15 BUS. PER DAY - RUN 3 MONTHS IN YEAR -
FRAME BLDG - METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE CLOSED LAMPS
CELLOIDINE - NO HEATING - STOVE IN OFFICE - 30" HOSE

BONDED WARE HO. (to 1897) CAPCY 700 BBLS - PAT. RACKS 6 TIERS
DO. DO. (1897 to 1902) " 1300 " " " 9 TIERS.
FRAME BLDG - SHINGLE ROOF -
NO WATCHMAN - LIGHTS MINERS LAMPS - KEROSENE OIL - NO HEATING -

Situated
12 Miles NE of BARDSTOWN
½ Mile N of BLOOMFIELD

BLOOMFIELD BRANCH - L. & N. R. R.

IRON BRIDGE

Situated
3 Miles East of BARDSTOWN KY

BOONE AND BRO.

Registered Distillery No 422 - 5th Distr. Nelson Co. KY
PRODUCT - BOURBON SOUR MASH WHISKEY.
CAPCY 67 BUS - PER DAY - PRODUCE 35 BUS. PER DAY -
RUN 5 MONTHS IN YEAR -
FRAME BLDG - SHINGLE ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE - CLOSED LAMPS - FUEL WOOD
HEAT STOVE IN OFFICE ONLY - 50' 1" HOSE -

BONDED WARE HO - (BROWN & BRO.) CAPCY 400 BBLS - PATENT RACKS - 7 TIERS
DO. DO. (BOONE & BRO.) " 900 " " " 5 TO 7 TIERS -
FRAME BLDGS - SHINGLE ROOF - NO WATCHMAN - LIGHTS CANDLES - NO HEATING -
WARE HOUSES USED FOR STORAGE ONLY -

BEECH FORK AND LORETTO PIKE

VACANT.

At GREENBRIER STATION
6 Miles East of BARDSTOWN, KY

THE GREENBRIER DISTILLERY CO.

W. M. COLLINS & CO. ALSO RUN "R. B. HAYDEN - "BELLE OF BOURBON"
Registered Distillery No 239 - 5th Distr. Nelson Co. KY
PRODUCT - BOURBON SOUR MASH WHISKEY -
CAPCY 300 BUS - PER DAY - RUN FULL CAPACITY - ABOUT 5 MONTHS IN THE YEAR -
FRAME BLDG PARTLY IRONCLAD - METAL ROOF - FIRE AND STEAM DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE - CLOSED LAMPS - FUEL COAL -
HEAT STOVE IN YEAST RM - TERRA COTTA FLUE - 100' 1¾" HOSE -
WATER SUPPLY - PUMP NO. AT CREEK - LARGE DUPLEX LAIDLAW-DUNN P. PUMP -
SUPPLIED FROM WELLS AND CREEK -

BONDED WARE HO. A - CAPCY 4250 BBLS - PAT. RACKS - 12 TIERS -
DO. DO. B. " 4250 " " " 12 "
FRAME BLDGS - METAL ROOF -
NO WATCHMAN - NO HEATING - LIGHTS KEROSENE CLOSED LAMPS OCCASLY
WARE HOUSES USED FOR STORAGE ONLY -
PROPOSED BONDED WARE HO - C. - CAP. 4250 BBLS - PAT. RACKS - 12 TIERS -
TO BE FRAME BLDG - IRON CLAD - METAL ROOF -

SLOP TROUGH

CATTLE SHED

SLOP TUBS.

Scale of Feet.

SPRINGFIELD BRANCH - L. & N. R. R.

TRESTLE

VACANT.

KENTUCKY, 5TH DISTRICT

KNOXVILLE BRANCH L. & N. R. R.

COON HOLLOW DISTILLERY

BIG SPRING DISTILLERY

DEPOT

OFFICE

IRON CLAD BUILDING. 78' To EAVES
BONDED WARE HO. "B"
CAPCY. 6000 BBLS. PAT. RACKS 9 TIERS
USED FOR STORAGE ONLY.
47' x 150'

IR. CLAD. BUILDING. 32' TO EAVES
BONDED WARE HO. "C"
CAPCY 3200 BBLS
PAT. RACKS 11 TIERS
USED FOR STORAGE ONLY
42' x 76'

78' To EAVES
BONDED WARE HO. No 1.
CAPCY. 4500 BBLS. PAT. RACKS 9 TIERS.
BASEMENT RAISED 2' 3" ABOVE GRADE
USED FOR STORAGE ONLY
IRON CLAD SHUTTERS ALL SIDES.
45' x 135'

90' To EAVES
BONDED WARE HO. No 2
CAPCY. 7000 BBLS. PAT. RACKS 11 TIERS.
BASEMENT RAISED 2' 3" ABOVE GRADE
USED FOR STORAGE ONLY
IRON CLAD SHUTTERS ALL SIDES.
47' x 145'

IR. CLAD. BUILDING. 18' EAVES
BONDED WARE HO. No 2 ANNEX
CAPCY. 1600 BBLS
PAT. RACKS 8 TIERS
(STORAGE ONLY)
NO HEATING
45' x 56'

18' To EAVES
BONDED WARE HO. "A"
CAPCY. 1000 BBLS
PAT. RACKS 7 TIERS
(STORAGE ONLY)
25' x 40'
IRON CLAD BUILDING

FREE WARE HO.
CAPCY. 600 BBLS
PAT. RACKS 6 TIERS
(STORAGE ONLY)
28' x 45'

THE NELSON COUNTY KY. DISTILLING CO.
COON HOLLOW DISTILLERY No. 294 - BIG SPRING DISTILLERY No. 379.

SLOP TROUGH

E.W. DIKE FROM CREEK & 80' W. PIKE FROM SPRING

CATTLE No. 1.

SHEDS No. 2.

HAY HO.

SHOP

SPRING HOUSE

ICE HO.

SLOP TUBS

AT COON HOLLOW
15 Miles W. of LEBANON KY.

COON HOLLOW DISTILLERY

Registered Distillery No. 294, 5th Distr. Nelson Co. Ky.

PRODUCTION BOURBON SOUR MASH WHISKEY
CAPCY. 300 BUS. & PRODUCE 150 BUS. PER DAY
RUN 6 MONTHS PER YEAR.

BIG SPRING DISTILLERY

Registered Distillery No. 379, 5th Distr. Nelson Co. Ky.

PRODUCTION BOURBON SWEET MASH WHISKEY
CAPCY. 436 BUS. & PRODUCE 109 BUS. PER DAY.
RUN 6 MONTHS PER YEAR.

BRICK & FRAME BUILDINGS. SHINGLE & METAL ROOFS.
NIGHT WATCHMAN. HEAT STOVES IN YEAST RMS. & OFFICE
LIGHTS KEROS. CLOSED LAMPS. - FUEL COAL.
100 OF 1" HOSE IN EACH DISTILLERY.
STEAM DOUBLERS

~WARE HOUSES~

BONDED WARE HO. No 1	CAPCY	4500	BBLS.	PAT. RACKS	9	TIERS. BRICK BLDG. METAL ROOF.
" " " No 2.	"	7000	"	" "	11	" " " " "
" " " No 2 ANNEX	"	1600	"	" "	8	" FR. BUILDG. IR. CLAD. " "
" " " "A"	"	1000	"	" "	7	" " " " "
" " " "B"	"	6000	"	" "	9	" " " " "
" " " "C"	"	3200	"	" "	11	" " " " "
FREE " " —	"	600	"	" "	7	" " " " "

NIGHT WATCHMAN. LIGHTS LARD OIL DARK LANTERNS. -
HEAT STEAM 90° FAHR. - NO HEAT IN ANNEX TO WARE HO. No 2
WARE HOUSES USED FOR STORAGE ONLY

WILLOW SPRING DISTILLING CO.

Registered Distillery No. 910. - 5th Distr. Nelson Co. Ky.

PRODUCTION, BOURBON SOUR MASH WHISKEY
CAPCY 100 BUSHELS PER DAY. - RUN 5 MONTHS OF YEAR -
FRAME BUILDING METAL AND SHINGLE ROOF -
FIRE UNDER DOUBLER - NO WATCHMAN -
LIGHTS KEROS. LANTERNS - FUEL COAL -
HEAT STOVE IN YEAST RM - 30' IN HOSE -

BONDED WARE HO. CAPCY 2000 BBLS - PAT. RACKS - 9 TIERS -
FRAME BUILDING METAL ROOF - IRON CLAD - NO HEATING -
LIGHTS CLOSED KEROS. LAMPS -

BONDED WARE HO.
CAPCY 2000 BBLS.
PAT. RACKS - 9 TIERS
45' x 58'
IN CLAD BLDG - 22' to EAVES

DITCH

KNOXVILLE BRANCH L. & N. R. R.

DISTILLERY

AT COON HOLLOW
15½ Miles N.W. of LEBANON KY.

NO EXPOSURE

HEAD AND BEAM

Registered Distillery No. 405, 5th Distr. Nelson Co., Ky.

ALSO RUN AS G. AND B. GERDES - MOUNTAIN LILY DISTILLING CO.

PRODUCTION BOURBON SOUR MASH WHISKEY
CAPCY. 100 BUS. PER DAY. RUN 7 MONTHS PER YEAR.

FRAME BUILDING. METAL ROOF.
NO WATCHMAN. FIRE UNDER DOUBLER.
HEAT STOVE IN YEAST ROOM & OFFICE.
LIGHTS KEROS. CLOSED LAMPS
FUEL COAL. 50' OF 1¼" HOSE.

~WARE HOUSES~

BONDED WARE HO. "A" CAPCY 1900 BBLS. PAT. RACKS 6 & 7 TIERS
" " " "B" " 2800 " " " " 11 "
FREE " " " — " 400 " " " " 7 "

FRAME BUILDINGS, IRON CLAD, METAL ROOF.
NO WATCHMAN. NO HEATING. LIGHTS CANDLES
WARE HOS. USED FOR STORAGE ONLY.

CATTLE SHED

CATTLE SHED

SLOP TROUGH

DISTILLERY

GRANARY

STOVE & STANLEY
FREE WARE HO.
CAPCY. 600 BBLS.
USED FOR STORAGE ONLY.

IRON CLAD
BONDED WARE HO. "A"
CAPCY. 1900 BBLS.
PAT. RACKS 6 & 7 TIERS
USED FOR STORAGE ONLY.

IRON CLAD
BONDED WARE HO. "B"
CAPCY. 2800 BBLS.
PAT. RACKS 7 TIERS
(STORAGE ONLY.)

ABOUT 700' TO J.B. DANT'S DISTILLERY

AT GETHSEMANE
18 Miles W. of LEBANON KY.

KNOXVILLE BRANCH - L. & N. R. R.

VACANT

NO EXPOSURE

J. B. DANT, formerly F. M. HEAD AND CO.

Registered Distillery No. 240, 5th Distr. Nelson Co. Ky.

ALSO RUN AS TAYLOR AND WILLIAMS

PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 80 BUS. PER DAY. RUN 6 MONTHS PER YEAR.

FRAME BUILDING. COMPOSITION ROOF.
NO WATCHMAN. LIGHTS KEROSENE LANTERNS.
HEAT STOVES IN OFFICE & YEAST ROOM.
FUEL COAL. FIRE UNDER DOUBLER.

~WARE HOUSES~

BONDED WARE HO. No 1 CAPCY 1200 BBLS. PAT. RACKS 9 TIERS. METAL ROOF.
" " " No 2 " 3300 " " " 9 " "
FREE " " 33'x36' " 800 " " " 9 " "
" " " 12'x25' " 80 " NO RACKS. SHINGLE ROOF.

FRAME BUILDINGS, ALL IRON CLAD, EXCEPT FREE WARE HO. 12'x25'
NO WATCHMAN. NO HEATING. LIGHTS CLOSED LARD OIL LAMPS.
WARE HOUSES USED FOR STORAGE ONLY.

POOL

DISTILLERY

STOCK YARD

SLOP

AT GETHSEMANE
18 Miles W. of LEBANON KY.

BONDED WARE HO. No 1
CAPCY 1200 BBLS.
PAT. RACKS 9 TIERS.
STORAGE ONLY

BONDED WARE HO No 2
CAPCY 3300 BBLS.
PAT. RACKS 9 TIERS.
(STORAGE ONLY.)

FREE WARE HO.
CAPCY. 800 BBLS.
PAT. RACKS 8 TIERS.
(STORAGE ONLY)

ABOUT 700' TO HEAD AND BEAMS DISTILLERY.

KNOXVILLE BRANCH L. & N. R. R.

VACANT

NEWTON BROS.

Registered Distillery No. 450, 5th Distr. Taylor Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY.
CAPCY. 25 BUS. PER DAY. RUN 4 MONTHS PER YEAR

FRAME BUILDING. SHINGLE ROOF.
NO WATCHMAN. FIRE UNDER DOUBLER.
NO HEATING. NO LIGHTS. FUEL COAL.
100' OF 1" HOSE.

DISTILLERY

FOUNDATION FOR NEW BONDED WARE HO.
35' x 50'
CAPCY 1500 BBLS.
PAT. RACKS 9 TIERS.
ELEVATION 35' ABOVE GRADE OF DISTILLERY

STEEP HILLSIDE

~WARE HOUSES~

BONDED WARE HO. (22' x 45') CAPCY. 300 BBLS. NO RACKS.
" " (20' x 32') " 200 " " "
NO WATCHMAN. NO HEATING & NO LIGHTS. FR. BLDG. SHINGLE RF.
PROPOSED BONDED WARE HO. TO BE FRAME BLDG. IR. CLAD. METAL ROOF.
CAPCY. 1000 BBLS. PAT. RACKS. 9 TIERS. - NO HEATING.

BONDED W. HO
CAPCY. 300 BBLS.
PAT. RACKS
22' x 45'

BONDED W. HO
CAPCY. 200 BBLS.
PAT. RACKS
20' x 32'

CATTLE SHED

Situated ½ Mile N. of
CAMPBELLSVILLE KY.

Brook

Putnam's Creek

LEBANON AND CAMPBELLSVILLE PIKE

WOODEN BRIDGE

Scale of Feet.
50 40 30 20 10 0 50 100 150

FORD BROS.

Registered Distillery No. 461, 5th Distr. Nelson Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY. 10 BUS. PER DAY. RUN 5 MONTHS PER YEAR.

FRAME BUILDING. - COMPOSITION ROOF.
NO WATCHMAN. NO HEAT EXCEPT STOVE IN OFFICE.
LIGHTS KEROSENE LANTERNS. FUEL WOOD.
FIRE UNDER DOUBLER.

SPRING

DISTILLERY

SLOP TROUGH TO CATTLE YARD

OLD STORAGE

Situated 15 Miles S.W. of
BARDSTOWN KY.
and ½ mile N. of NEW HAVEN KY.

LOUISVILLE AND NASHVILLE TURN-PIKE

BONDED WARE HO. CAPCY. 300 BBLS. - NO RACKS.
FRAME BUILDING IRON CLAD - METAL ROOF
NO WATCHMAN. NO HEATING. LIGHTS CANDLES.

IR. CLAD
BONDED WARE HO.
CAPCY. 100 BBLS.
PAT. RACKS
22' x 45'

VACANT

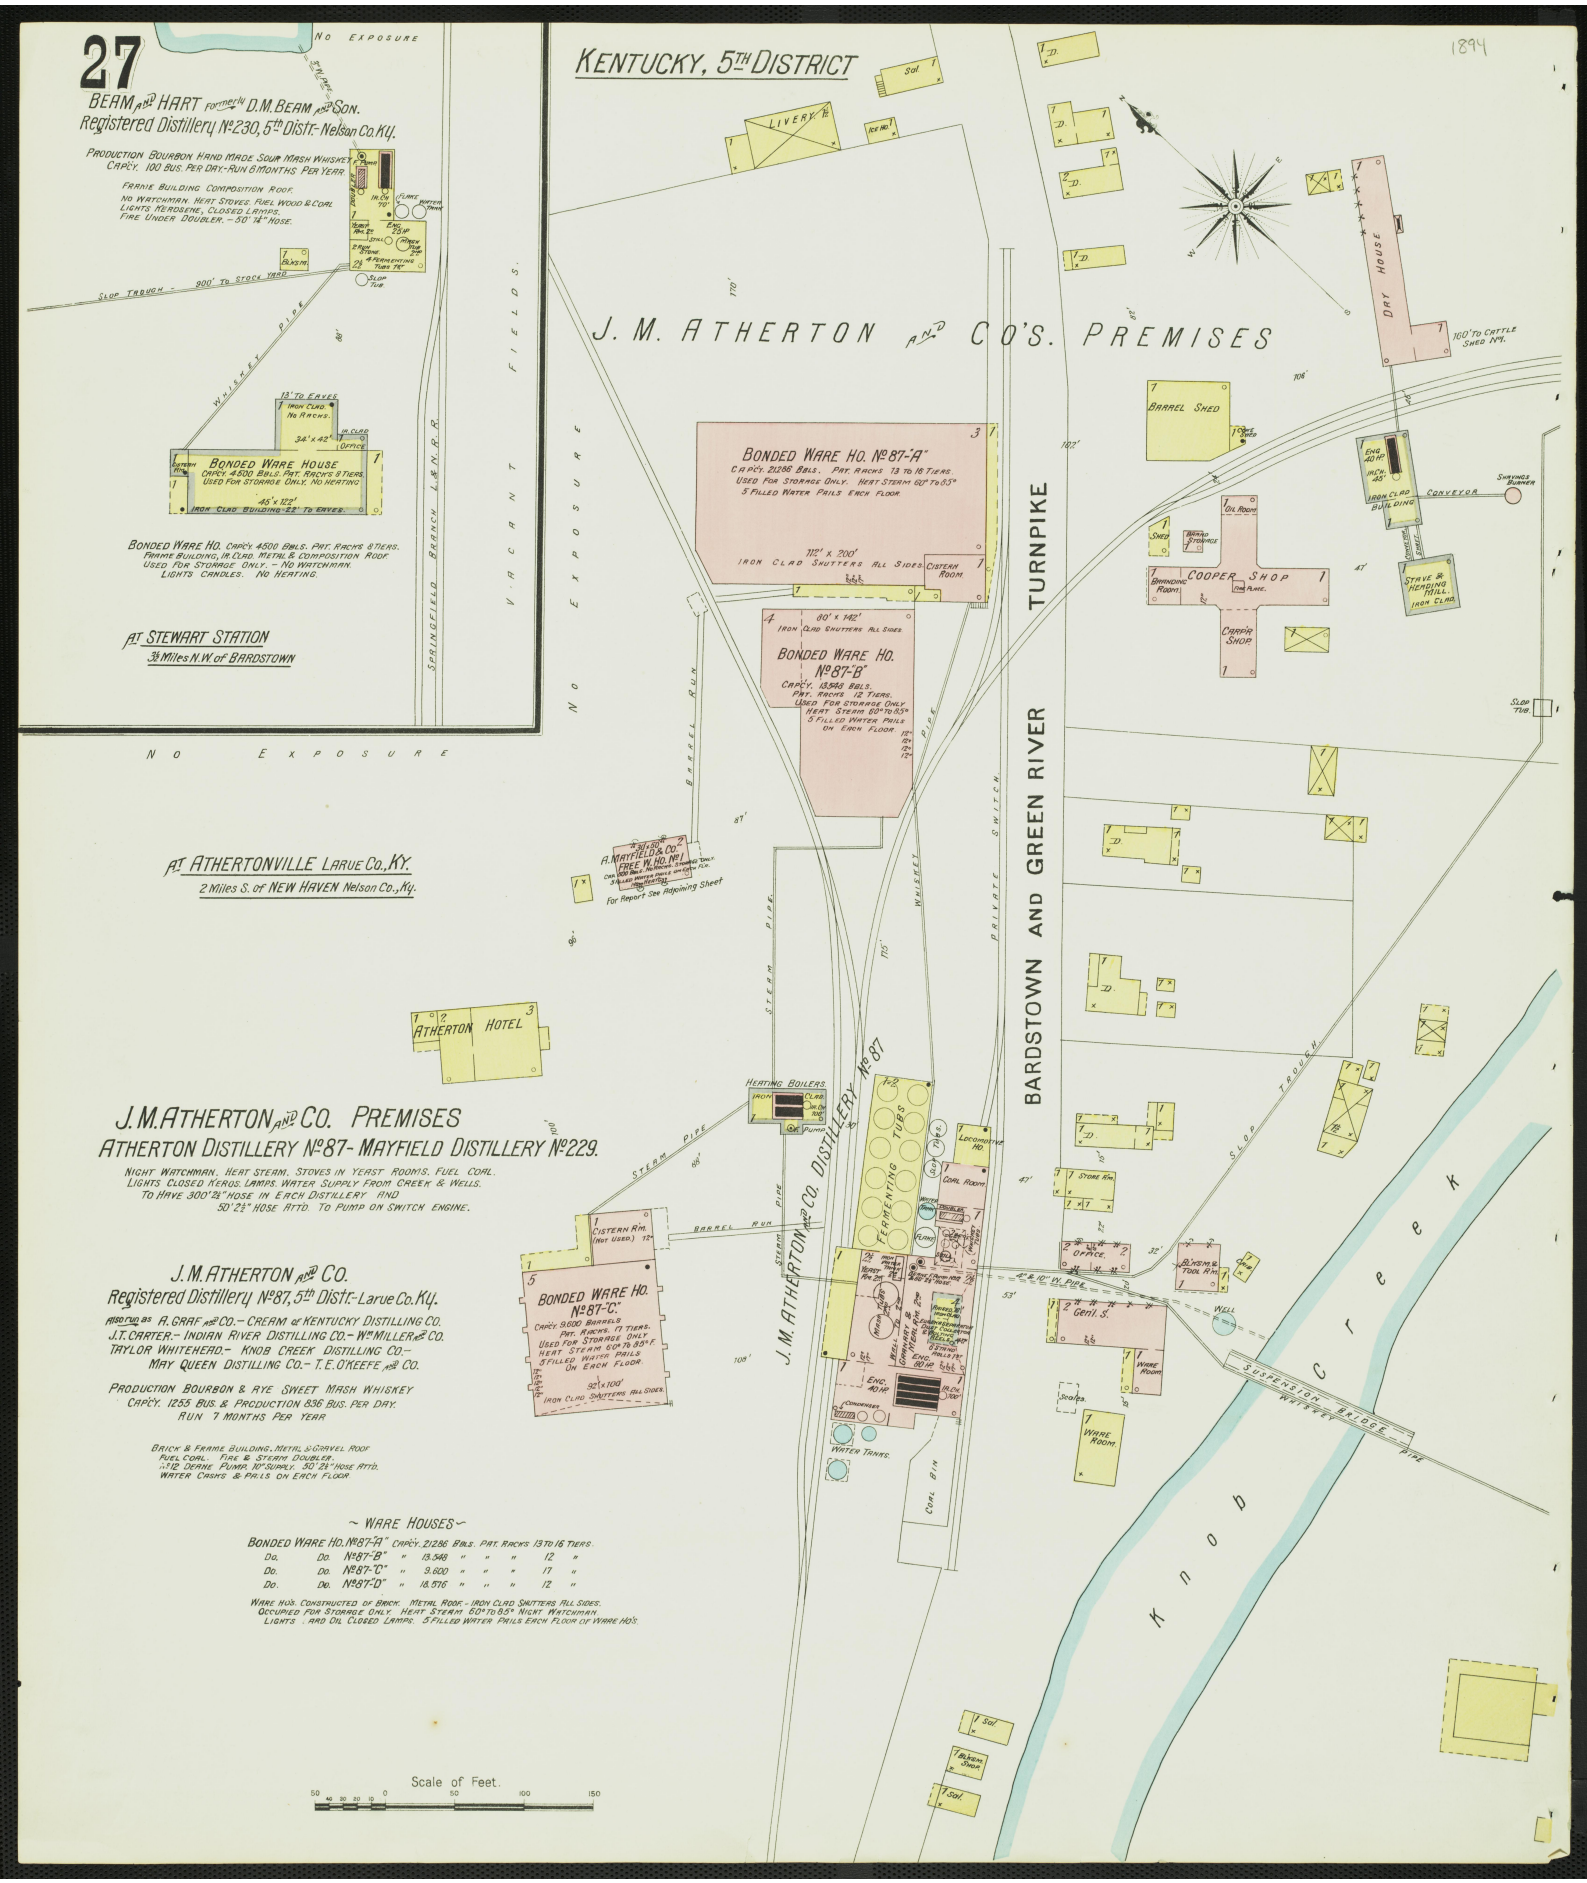
27
BEAM AND HART formerly D.M. BEAM AND SON.
Registered Distillery No. 230, 5th Distr.- Nelson Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY. 100 BUS. PER DAY - RUN 6 MONTHS PER YEAR.
FRAME BUILDING COMPOSITION ROOF.
NO WATCHMAN. HEAT STOVES. FUEL WOOD & COAL
LIGHTS KEROSENE, CLOSED LAMPS.
FIRE UNDER DOUBLER. - 50' 1½" HOSE.
SLOP TROUGH - 900' TO STOCK YARD
WHISKEY PIPE
13' TO EAVES
IRON CLAD. NO RACKS.
34' x 42'
IR. CLAD OFFICE
BONDED WARE HOUSE
CAPCY. 4500 BBLS. PAT. RACKS 8 TIERS.
USED FOR STORAGE ONLY. NO HEATING
45' x 122'
IRON CLAD BUILDING - 22' TO EAVES.
BONDED WARE HO. CAPCY. 4500 BBLS. PAT. RACKS 8 TIERS.
FRAME BUILDING, IR. CLAD. METAL & COMPOSITION ROOF.
USED FOR STORAGE ONLY. - NO WATCHMAN.
LIGHTS CANDLES. NO HEATING.
AT STEWART STATION
3½ Miles N.W. of BARDSTOWN
NO EXPOSURE
SPRINGFIELD BRANCH L.&N.R.R.
VACANT FIELDS.
KENTUCKY, 5TH DISTRICT
1894
LIVERY
J. M. ATHERTON AND CO'S. PREMISES
DRY HOUSE
160' TO CATTLE SHED No. 1
BARREL SHED
BONDED WARE HO. No. 87-"A"
CAPCY. 21286 BBLS. PAT. RACKS 13 TO 16 TIERS.
USED FOR STORAGE ONLY. HEAT STEAM 60° TO 85°
5 FILLED WATER PAILS EACH FLOOR.
112' x 200'
IRON CLAD SHUTTERS ALL SIDES.
CISTERN ROOM.
80' x 142'
IRON CLAD SHUTTERS ALL SIDES.
BONDED WARE HO. No. 87-"B"
CAPCY. 13,548 BBLS.
PAT. RACKS 12 TIERS.
USED FOR STORAGE ONLY
HEAT STEAM 60° TO 85°
5 FILLED WATER PAILS
ON EACH FLOOR.
BARREL RUN
A. MAYFIELD & CO. FREE W. HO. No. 1
For Report See Adjoining Sheet
NO EXPOSURE
BARDSTOWN AND GREEN RIVER TURNPIKE
PRIVATE SWITCH
WHISKEY PIPE
STEAM PIPE
ATHERTON HOTEL
HEATING BOILERS
J. M. ATHERTON AND CO. DISTILLERY No. 87
FERMENTING TUBS
LOCOMOTIVE HO.
COAL ROOM
STORE RM.
OFFICE
BLKSM. & TOOL RM.
GENL. S.
WARE ROOM
SLOP TROUGH
SUSPENSION BRIDGE
WHISKEY PIPE
Knob Creek
CISTERN RM. (NOT USED)
BONDED WARE HO. No. 87-"C"
CAPCY. 9,600 BARRELS
PAT. RACKS. 17 TIERS.
USED FOR STORAGE ONLY
HEAT STEAM 60° TO 85° F.
5 FILLED WATER PAILS
ON EACH FLOOR.
92' x 100'
IRON CLAD SHUTTERS ALL SIDES.
WATER TANKS.
COAL BIN
AT ATHERTONVILLE LARUE CO., KY.
2 Miles S. of NEW HAVEN Nelson Co., Ky.
J. M. ATHERTON AND CO. PREMISES
ATHERTON DISTILLERY No. 87 - MAYFIELD DISTILLERY No. 229.
NIGHT WATCHMAN. HEAT STEAM. STOVES IN YEAST ROOMS. FUEL COAL.
LIGHTS CLOSED KEROS. LAMPS. WATER SUPPLY FROM CREEK & WELLS.
TO HAVE 300' 2½" HOSE IN EACH DISTILLERY AND
50' 2½" HOSE ATT'D. TO PUMP ON SWITCH ENGINE.
J. M. ATHERTON AND CO.
Registered Distillery No. 87, 5th Distr.- Larue Co. Ky.
ALSO RUN AS A. GRAF AND CO. - CREAM OF KENTUCKY DISTILLING CO.
J.T. CARTER. - INDIAN RIVER DISTILLING CO. - WM. MILLER AND CO.
TAYLOR WHITEHEAD. - KNOB CREEK DISTILLING CO. -
MAY QUEEN DISTILLING CO. - T.E. O'KEEFE AND CO.
PRODUCTION BOURBON & RYE SWEET MASH WHISKEY
CAPCY. 1255 BUS. & PRODUCTION 836 BUS. PER DAY.
RUN 7 MONTHS PER YEAR
BRICK & FRAME BUILDING. METAL & GRAVEL ROOF
FUEL COAL. FIRE & STEAM DOUBLER.
No. 12 DEANE PUMP. 10" SUPPLY. 50' 2½" HOSE ATT'D.
WATER CASKS & PAILS ON EACH FLOOR.
~ WARE HOUSES ~
BONDED WARE HO. No. 87-"A" CAPCY. 21286 BBLS. PAT. RACKS 13 TO 16 TIERS.
Do. Do. No. 87-"B" " 13,548 " " " 12 "
Do. Do. No. 87-"C" " 9,600 " " " 17 "
Do. Do. No. 87-"D" " 18,576 " " " 12 "
WARE HO'S. CONSTRUCTED OF BRICK. METAL ROOF. - IRON CLAD SHUTTERS ALL SIDES.
OCCUPIED FOR STORAGE ONLY. HEAT STEAM 60° TO 85° NIGHT WATCHMAN.
LIGHTS AND OIL CLOSED LAMPS. 5 FILLED WATER PAILS EACH FLOOR OF WARE HO'S.
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY, 5TH DISTRICT

AT ATHERTONVILLE LARUE CO. KY.
2 MILES S. OF NEW HAVEN NELSON CO. KY.

J. M. ATHERTON AND CO'S. PREMISES

J. M. ATHERTON AND CO. CATTLE SHED No1.

J. M. ATHERTON AND CO. CATTLE SHED No2

HAY SHED.

SHED.

SLOP TUBS.

SLOP TROUGH

SLOP TUBS.

SHED.

SLOP TROUGH ON TRESTLE

SLOP TUBS.

K n o b C r e e k

CATTLE YARD

SLOP TROUGH

BARREL SHED. 53'x103'

SLOP TUBS.

BARREL RUN.

SLOP TUBS.

BARREL RUN.

WATER TANK

WATER PIPE

WHISKEY STEAM PIPE

FREE WARE HO. No3.
CAPCY. 4000 BBLS.
PAT. RACKS 11 TIERS.
USED FOR STORAGE ONLY
No HEATING.
FIVE FILLED WATER PAILS EACH FLOOR
65' x 100'
3 SIDES

BONDED WARE HOUSES
No229 "A"
CAPCY. 9335 BBLS. PAT. RACKS 10 TO 15 TIERS.
USED FOR STORAGE ONLY
HEAT STEAM 50° TO 65°
FIVE FILLED WATER PAILS EACH FLOOR
65'x 115' 65'x 65'x 65'
CLAD IRON SHUTTERS ON ALL SIDES

A. MAYFIELD AND CO.
Registered Distillery No229, 5th District-Larue Co., Ky.

Also run as T.E. O'KEEFE AND CO. - W.M. URI AND CO. - ADAM TAYLOR AND CO.
HILLARY AND KNOTT - S. O'BRYAN AND CO. - GRABFELDER AND TACHAU.
J.T.S. BROWN AND SON. - HOWARD AND CO. - W.W. BROWNFIELD.
DAVID WISE DISTILLING CO. - KENWOOD DISTILLING CO.
JOHN. D. HINDS.

PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 711 BUS. PER DAY - RUN 7 MONTHS PER YEAR

A. MAYFIELD AND CO. DISTILLERY No229.

12 FERMENTING TUBS 10'0" 4'2"
RAISED 20'0" IRON CAPS
YEAST RM. 2nd
MASH TUB
GRAIN
WATER TANK
GRAIN
MASH TUBS
3 IRON WATER TANKS 2nd
TWO ENDS 15M EACH
IRON CYL. STEAM HOT WATER TANK
BOILER
FUEL ROOM.
ENGINE ROOM
CEMENT FLOOR
DUPLEX PUMPS & 300' 2½" HOSE
CISTERN
STEAM ROLLER
FOR BARN CLEANING & DUST COLLECTOR
ENG. 50 HP.
FIRE ICE ETC.
FIRE PUMPS
LOAD DOOR
CAPACITY 1000 BBLS
WELL
U.S. OFFICE

BRICK BUILDING - METAL, GRAVEL & SHINGLE ROOF
NIGHT WATCHMAN. HEAT STEAM - STOVE IN YEAST ROOM
CLOSED KEROS. LIGHTS. FUEL COAL STEAM & FIRE DOUBLER
WATER SUPPLY FROM CREEK & WELLS.
WATER CASKS & PAILS EACH FLOOR. 300' 2½" HOSE
TWO LARGE DUPLEX PUMPS. 10" SUPPLY PIPE.
TO HAVE 300' 2½" HOSE & 50' 2½" HOSE ATTD. TO PUMP ON SWITCH ENGINE

10" W. PIPE

WELL

WELL

WARE HOUSES
A. MAYFIELD AND CO.

BONDED WARE HO.	No229-"A"	CAPCY.	4555	BBLS - PAT. RACKS 10 TO 15 TIERS
Do.	Do.	No229 "B"	"	12940	" " " " - 15 "
Do.	Do.	No229 "C"	"	16200	" " " " - 15 "
FREE	Do.	No 1 -	"	500.	" No RACKS See Adjoining Sheet
Do.	Do.	No 2 -	"	3822.	" PAT. RACKS - 14 TIERS.
Do.	Do.	No 3 -	"	4000.	" " " 11 "

WARE HOUSES CONSTRUCTED OF BRICK - METAL ROOF - 14 CLAD SHUTTERS ALL SIDES.
OCCUPIED FOR STORAGE ONLY.
NIGHT WATCHMAN - LIGHTS CLOSED LARD OIL LAMPS.
BONDED WARE HOUSES HEATED BY STEAM 50° TO 65° F. NO HEAT IN FREE WARE HOS.
FIVE FILLED WATER PAILS ON EACH FLOOR OF ALL WARE HOUSES.

SUSPENSION BRIDGE

WHISKEY PIPE

WINDOWS
VACANT
WINDOWS

FREE WARE HO No2
CAPCY. 3822 BBLS
PAT. RACKS 14 TIERS
USED FOR STORAGE ONLY
No HEATING
5 PAILS WATER EACH FLOOR

STEAM PIPE

A. MAYFIELD AND CO.
BONDED WARE HO.
No 229-"C".
CAPCY. 16200 BBLS.
PAT. RACKS 15 TIERS.
USED FOR STORAGE ONLY
No HEAT STEAM 60° TO 65°
FIVE FILLED WATER PAILS EA. FLR.
93' x 140'
IRON CLAD SHUTS. ALL SIDES.

WATER TANKS.

J. M. ATHERTON AND CO. BONDED WARE HO.
No 80-"D"
CAPCY. 18376 BBLS. PAT. RACKS. 12 TIERS.
USED FOR STORAGE ONLY
HEAT STEAM 60° TO 65°
FIVE FILLED WARM PAILS EACH FLOOR.
90' x 105'
90' x 120'
IRON CLAD SHUTTERS ALL SIDES.

CISTERN ROOM.

For Report See Adjoining Sheet

COUNTY ROAD

ROAD

Scale of Feet.
50 40 30 20 10 0 50 100 150

1894

KENTUCKY - 5th DISTRICT

E. L. MILES

E. L. MILES Distillery No 146 - NEW HOPE Distillery No 101

E. L. MILES and CO'S DISTILLERY No 146.

NEW HOPE DISTILLING CO'S DISTILLERY No 101.

ROLLING FORK - NEW HOPE PIKE

GETHSEMANE

BONDED WARE HO. "A"
CAPCY 13000 BBLS -
PAT. RACKS - 17 TIERS -
STEAM HEAT 60° TO 85° -
USED FOR STORAGE ONLY -
IRON SHUTTERS ALL SIDES
175' x 134'
20' TO EAVES

FREE WARE HO. "W"
CAPCY 4000 BBLS -
PAT. RACKS - 9 TIERS -
NO HEATING -
USED FOR STORAGE ONLY -
IRON SHUTTERS ALL SIDES
41' x 109'
35' TO EAVES

CATTLE SHED
100' x 125'

CATTLE SHED
112' x 145'

STOP TROUGH

TWO 10" W. PIPES

E. L. MILES
Also Mfg. as The TWIN SPRING DISTILLING CO. - ADAMS, TAYLOR and CO.
E. L. MILES and CO.
Registered Distillery No 146 - 5th Distr. Nelson Co. Ky.
PRODUCTION, BOURBON & RYE SWEET MASH WHISKEYS
CAPCY 693 BUS. AND PRODUCE 300 BUS. PER DAY.
RUN 6 MONTHS OF YEAR -
BRICK AND FRAME BLDG. METAL ROOF - FIRE UNDER DOUBLER

E. L. MILES
Also Mfg. as The NEW HOPE DISTILLING CO. - ADAMS, TAYLOR and CO.
Registered Distillery No 101 - 5th Distr. Nelson Co. Ky.
PRODUCTION, BOURBON & RYE HAND MADE SOUR MASH WHISKEY -
CAPCY 300 BUS. PER DAY - RUN FULL CAPCY ABOUT 6 MONTHS OF YEAR -
BRICK AND FRAME BLDG. METAL ROOF - FIRE UNDER DOUBLER -

NIGHT WATCHMAN WHEN RUNNING - NO CLOCK -
LIGHTS, INCAND. ELECTRIC - FUEL COAL -
HEAT STOVE IN YEAST ROOM -
100' 1¾" HOSE IN EACH DISTILLERY
WATER SUPPLY FROM LAKE -

AT NEW HOPE KY.
17 Miles N.W. of LEBANON KY.

L. & N. R. R. (KNOXVILLE BRANCH)

BONDED WARE HO. "X"
CAPCY 12000 BBLS -
PAT. RACKS - 12 TIERS -
STEAM HEAT 60° TO 85° -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES
90' x 127'
30' TO EAVES

BONDED WARE HO. "B"
CAPCY 13000 BBLS -
PAT. RACKS - 13 TIERS -
STEAM HEAT 61° TO 85° -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES -
100' x 133'
32' TO EAVES

MAIN ST.

SHERLEY AV.

L a k e

N E W H O P E

Drugs

BONDED WARE HO. "A" CAPCY 16000 BBLS - PATENT RACKS - 11 TIERS - STEAM HEAT 60° TO 85° -
Do. Do. "B" " 13000 " " " 13 " " " "
Do. Do. "X" " 12000 " " " 12 " " " "
FREE WARE HO. "W" " 4000 " " " 9 " NO HEATING

BRICK BUILDS. METAL ROOF - NIGHT WATCHMAN WHEN RUNNING - NO CLOCK -
LIGHTS, SIGNAL OIL CLOSED LAMPS - INCAND. ELECTRIC LIGHTS IN BONDED W. HO. "B"
WARE HOUSES USED FOR STORAGE ONLY -

BELLE of NELSON DISTILLING CO.

Formerly GEO. M. HAGANS, BELLE of KENTUCKY DISTILLERY No 3373
Registered Distillery No 271 - 5th Distr. Nelson Co. Ky.
PRODUCTION BOURBON & RYE HAND MADE SOUR MASH WHISKEYS
CAPCY 714 BUS. AND PRODUCE 519 BUS. PER DAY.
RUN 5 MONTHS OF YEAR -
FRAME BUILDING METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS, KEROSENE LANTERNS -
HEAT STOVE IN YEAST ROOM - FUEL COAL -
WATER FROM SPRING, SUPPLIED BY 2½-4" & 3" W. PIPES
200 ¾" HOSE -

BONDED WARE HO. No 2. CAPCY 5900 BBLS - PAT. RACKS - 13 TIERS -
Do. Do. No 3. " 10,000 " " " 18 "
Do. Do. No 4. " 1,300 " " " 6 "
FREE WARE HO. " 1230 " " " 6 "

FRAME BLDGS - IRON CLAD METAL ROOF -
NO WATCHMAN - LIGHTS, HEADLIGHT OIL CLOSED LAMPS
BONDED WARE HOS. HEATED BY STEAM WHEN RUNNING 60° TO 80°
WARE HOS. USED FOR STORAGE ONLY -

Situated 16 Miles N.W. of LEBANON KY.
1 Mile E. of NEW HOPE KY.

N O E X P O S U R E

FREE WARE HO.
CAPCY 1200 BBLS -
PAT. RACKS - 6 TIERS -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES -
30' x 80'
20' TO EAVES

BONDED WARE HO. No 2.
CAPCY 5900 BBLS -
PAT. RACKS - 13 TIERS -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES -
90' x 127'
30' TO EAVES

BONDED WARE HO. No 4.
CAPCY 1300 BBLS -
PAT. RACKS - 6 TIERS -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES -
30' x 80'
20' TO EAVES

BONDED WARE HO. No 3.
CAPCY 10,000 BBLS -
PAT. RACKS - 18 TIERS -
USED FOR STORAGE ONLY -
IRON CLAD SHUTTERS ALL SIDES -
37' x 135'
30' TO EAVES

CATTLE SHED

SIDE HILL

WHISKEY PIPE

STEEP

ELEVATION 65' ABOVE GRADE OF DISTILLERY

DRIVE

GRANARY

FUEL ROOM

STOP TROUGH

Pond

DISTILLERY

Scale of Feet.
50 40 30 20 10 0 50 100 150

V A C A N T

V A C A N T

KENTUCKY 5TH DISTRICT

1894

30

HENRY SUTHERLAND Suc'r to The Pearl Of Nelson Distilling Co.
Registered Distillery No 168 - 5th Distr - Nelson Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY

CAPCY 60 BUS - PRODUCE 36 BUS DAILY - RUN 5 MONTHS OF YEAR
BLDG FRAME - SHINGLE ROOF - FIRE UNDER DOUBLER.

NO WATCHMAN - LIGHTS KEROSENE; LANTERNS - NO HEATING.
STOVE IN OFFICE - FUEL WOOD.

Situated 4 Miles S.W. of BARDSTOWN

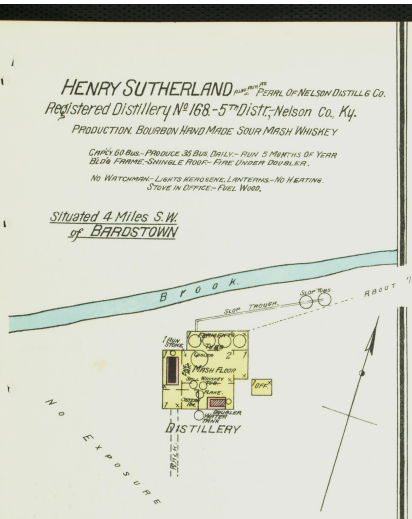

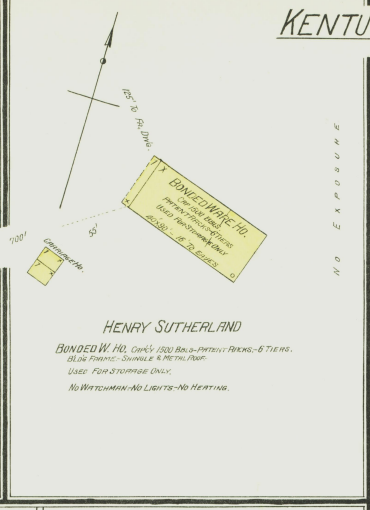

HENRY SUTHERLAND

BONDED W. HO. CAPCY 1500 BBLS - PATENT RACKS - 6 TIERS.
BLDG FRAME - SHINGLE & METAL ROOF.
USED FOR STORAGE ONLY.

NO WATCHMAN - NO LIGHTS - NO HEATING.

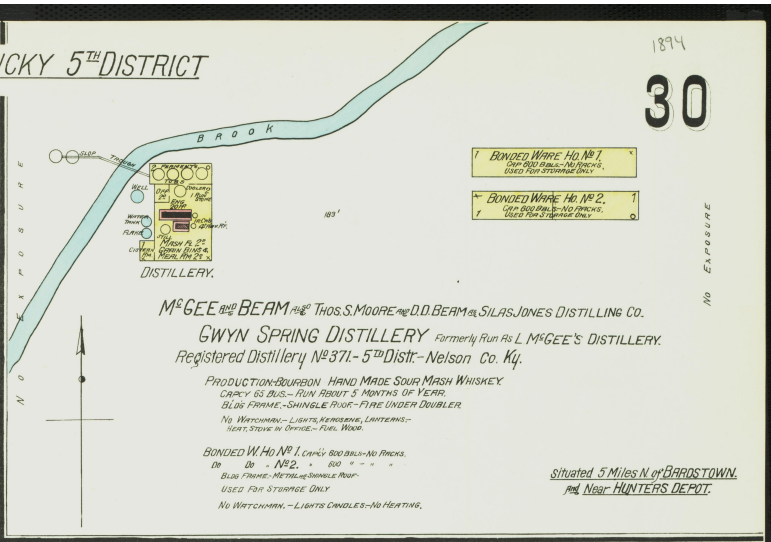

McGEE and BEAM Suc'rs to Thos. S. Moore and D.D. Beam Suc'rs to Silas Jones Distilling Co.
GWYN SPRING DISTILLERY Formerly Run As L. McGEE'S DISTILLERY.
Registered Distillery No 371 - 5th Distr - Nelson Co. Ky.

PRODUCTION - BOURBON HAND MADE SOUR MASH WHISKEY.
CAPCY 65 BUS. - RUN ABOUT 5 MONTHS OF YEAR.
BLDG FRAME - SHINGLE ROOF - FIRE UNDER DOUBLER.
NO WATCHMAN. - LIGHTS, KEROSENE, LANTERNS; -
HEAT, STOVE IN OFFICE. - FUEL, WOOD.

BONDED W. HO. No 1. CAPCY 800 BBLS - NO RACKS.
DO - DO - No 2. " 600 " - " - "
BLDG FRAME - METAL & SHINGLE ROOF -
USED FOR STORAGE ONLY
NO WATCHMAN. - LIGHTS CANDLES - NO HEATING.

Situated 5 Miles N. of BARDSTOWN. and Near HUNTERS DEPOT.

LANCASTER DISTILLING CO. Formerly LANCASTER DISTILLING CO. Suc'rs to S.P. LANCASTER.
Registered Distillery No 415 - 5th Distr - Nelson Co. Ky.

PRODUCTION - BOURBON SWEET MASH WHISKEY.
CAP 305 BUS - PRODUCE 280 BUS PER DAY - RUN 9 MOS OF YEAR.
BLDG FRAME - METAL, COMBUSTIONINE SHINGLE ROOF.
FIRE ins STEAM DOUBLER

NO WATCHMAN - LIGHTS CLOSED KEROSENE LAMPS - FUEL COAL.
HEAT STOVE IN YEAST ROOM & OFFICE - 50' 1" HOSE.

Situated 1½ Miles N.W. of BARDSTOWN.

BONDED WARE HO No 1 CAPCY 7000 BBLS - PAT RACKS - 9 TO 10 TIERS
STEAM PIPES IN ROOM (28 x 126') - HEATED OCCASIONALLY WHEN RUNNING, ABOUT 60°
BONDED WARE HO No 2 CAPCY 5000 BBLS - PAT RACKS - 10 TIERS - NO HEATING
BLDG FRAME, METAL ROOF - IRON CLAD -
USED FOR STORAGE ONLY
NO WATCHMAN. - LIGHTS CANDLES.

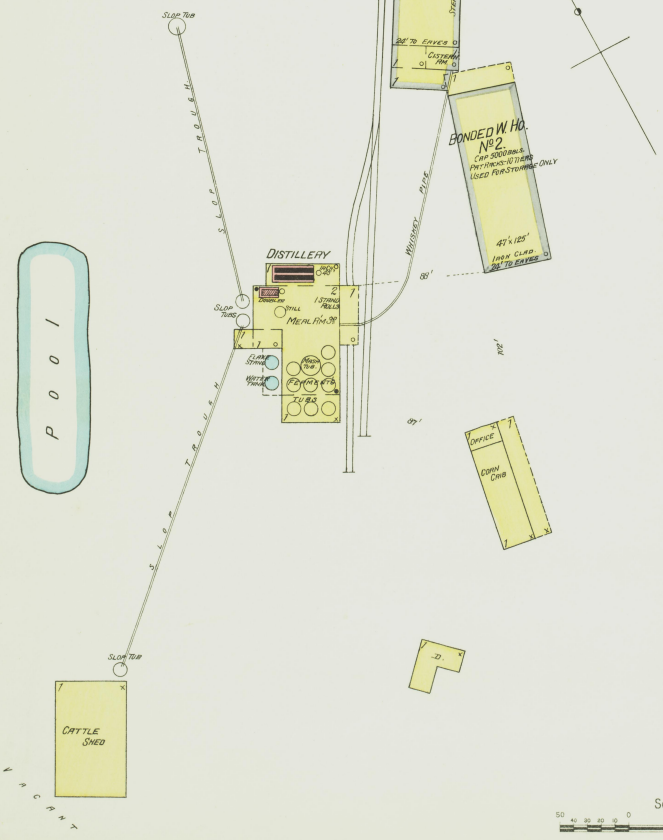

HENRY McKENNA
Registered Distillery No 111. - 5 Distr., Nelson Co. Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY.

CAP 100 BUS. - RUN FULL CAPCITY ABOUT 6 MONTHS OF YEAR
BLDG BRICK & FRAME - METAL ROOF - FIRE UNDER DOUBLER.

NO WATCHMAN. - HEAT STOVE IN OFFICE.
LIGHTS CANDLES. - FUEL COAL, WOOD & COBS.
1 OC 1¼" HOSE

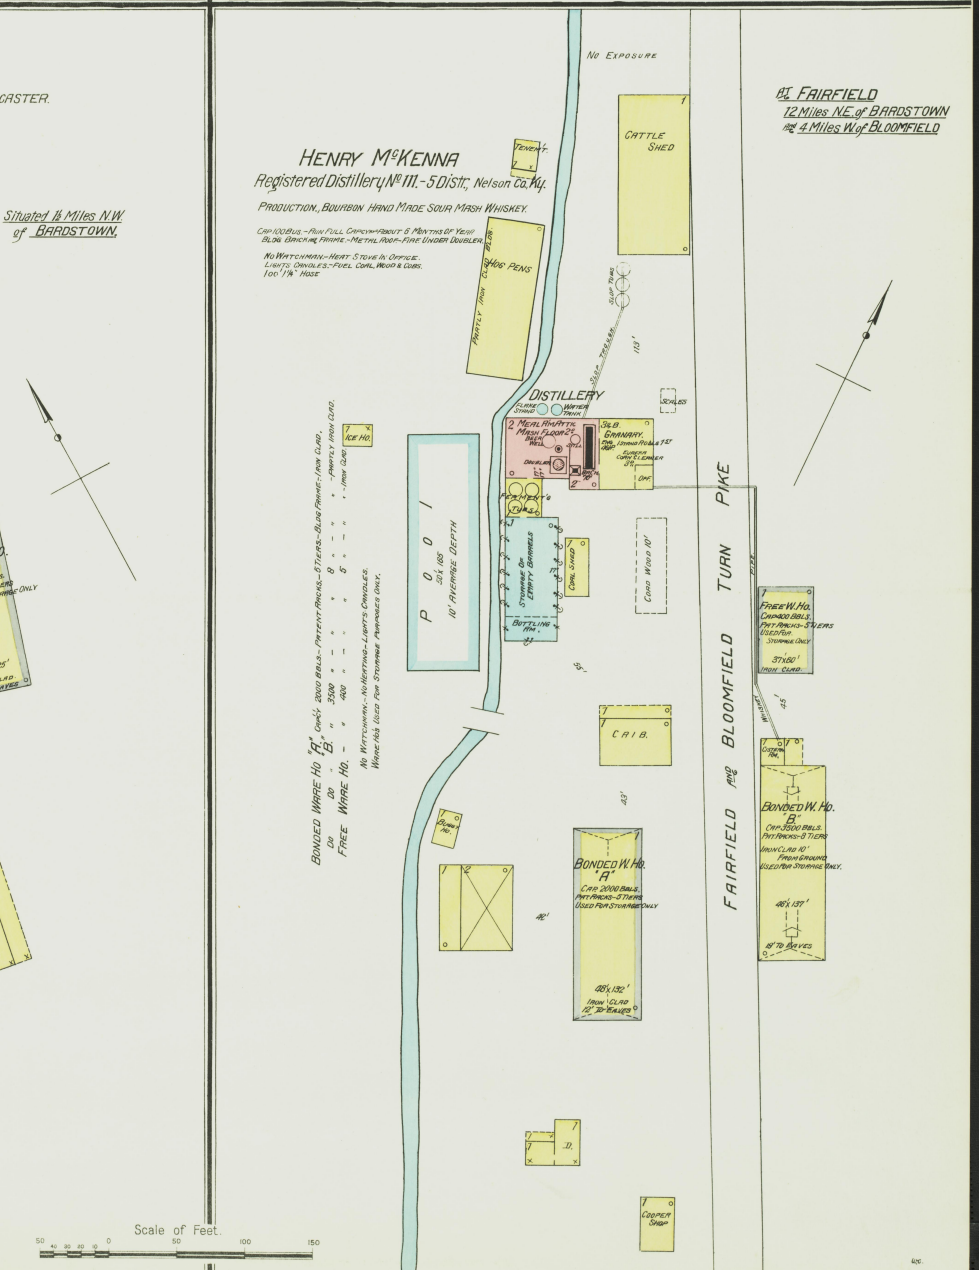

Scale of Feet.
50 40 30 20 10 0 50 100 150

Ct. FAIRFIELD
12 Miles N.E. of BARDSTOWN
and 4 Miles W. of BLOOMFIELD

31

KENTUCKY - 5TH DISTRICT

1894

AT DANT STATION
14 Miles West of LEBANON

DANT STATION

KNOXVILLE BRANCH OF L & N R R

DISTILLERY

WHISKEY PIPE

RETAINING WALL

BONDED WARE HO.
CAP. 3800 BBLS - PAT. RACKS - 8 TIERS
IN CLAD SHUTS - ALL SIDES -
30' x 100' - 18' TO EAVES -
USED FOR STORAGE ONLY -

PROPOSED BONDED WH NO.
CAP. 600 BBLS
PAT. RACKS - 6 TIERS
28' x 50'

FREE WARE HO.
CAP. 450 BBLS
PAT. RACKS - 8 TIERS
30' x 50'

110' TO SMALL FR. COOPER SHOP SHOP

TOP OF BANK

J. W. DANT
Registered Distillery No 189 - 5th Distr. Marion Co. KY.
PRODUCT - BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 100 BUS. PER DAY - RUN 6 MONTHS IN YEAR; -
FRAME BLDG - SHINGLE AND COMPOSH ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE LANTERNS - FUEL COAL -
HEAT STOVE IN OFFICE ONLY - 50' 1/2" HOSE -

SLOP TROUGH

SPRING

BROOK

CATTLE SHED

VACANT

FIELDS

BONDED WARE HO. (50'x100') CAP. 3800 BBLS - PAT. RACKS - 8 TIERS -
FREE DO. (15'x50') " 450 " " " 8 " -
BRICK BLDGS - METAL ROOF - NO WATCHMAN - NO HEATING - NO LIGHTS -
USED FOR STORAGE ONLY -

PROPOSED BONDED WARE HO. (28'x50')
CAPCY 600 BBLS - PAT. RACKS - 6 TIERS -
FRAME BLDG - IRON CLAD - METAL ROOF -

Hardin's Creek

GEO. D. BURKS
Registered Distillery No 440 - 5th Distr.
Marion Co. KY

PRODUCT - BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 60 BUS. - PRODUCE 30 BUS. PER DAY - RUN 5 MOS IN YEAR
FRAME BLDG - SHINGLE ROOF - FIRE UNDER DOUBLER
NO WATCHMAN - NO LIGHTS - HEAT STOVE IN OFFICE ONLY
FUEL WOOD - WATER AND STEAM POWER -

BONDED WARE HO. No 1. CAPCY 485 BBLS
PAT. RACKS - 5 TIERS
DO. DO - No 2. - CAPCY 630 BBLS
PAT. RACKS - 5 TIERS

FRAME BLDGS - METAL ROOF -
NO WATCHMAN - NO LIGHTS - NO HERTING -
WARE HOUSES USED FOR STORAGE ONLY -

CATTLE SHED

SLOP TROUGH

BROOK

GRIST MILL
ENG. 40 HP.

DISTILLERY

MILL RACE

BONDED W. HO. No 2
CAP. 630 BBLS
PAT. RACKS - 5 TIERS
STORAGE ONLY
28' x 48'

BONDED W. HO. No 1
CAP. 800 BBLS
PAT. RACKS - 5 TIERS
(STORAGE ONLY)

VACANT FIELDS

SMITH AND SMITH formerly SMITH, BLAIR & CO.
Registered Distillery No 174 - 5th Distr. Marion Co. Ky.
PRODUCT - BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 61 BUS. PER DAY - RUN 4 MONTHS IN THE YEAR -
FRAME BLDG - SHINGLE ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE, CLOSED LAMPS - FUEL COAL & WOOD -
HEAT STOVE IN OFFICE ONLY - NO FIRE APPLIANCES -

BONDED WARE HO. (35'x70') CAPCY 1350 BBLS - PAT. RACKS - 7 TIERS -
FRAME BLDG - SHINGLE ROOF -

NEW BONDED W. HO. (33'x45') CAP. 1000 BBLS - PAT. RACKS - 5 TIERS -
FRAME BLDG - METAL ROOF -

NO WATCHMAN - LIGHTS CANDLES - NO HERTING -
WARE HOS. USED FOR STORAGE ONLY -

BONDED W. HO. No 2
CAP. 1000 BBLS
PAT. RACKS - 7 TIERS
FRAME BLDG - SHINGLE ROOF
USED FOR STORAGE ONLY
35' x 120'

1 NEW BONDED W. HO.
CAP. 1000 BBLS
PAT. RACKS - 5 TIERS
STORAGE ONLY
35' x 60'

BROOK

WHISKEY PIPE

SLOP PIPE

SPRING

WATER TANK

ENG. 25 HP.

DOUBLER

BARREL SHED

DISTILLERY

KNOXVILLE BRANCH L. & N. R. R.

200' TO COOPER SHOP.

AT CHICAGO.
12 Miles W. of LEBANON

Pond.

AT LORETTO
10 Miles West of LEBANON

COOPER SHOP

KNOXVILLE BRANCH L. & N. R. R.

BONDED WARE HO.
45' x 100'
CAP. 3000 BBLS
PAT. RACKS - 9 TIERS
IRONCLAD BLDG
USED FOR STORAGE ONLY

BONDED WARE HO.
45' x 70'
CAP. 2000 BBLS
PAT. RACKS - 9 TIERS
IN CLAD SHUTS ALL SIDES
USED FOR STORAGE ONLY
20' TO EAVES

150' TO FR. DW'G

WALK

BARREL RUN

WHISKEY PIPE

DISTILLERY

OFFICE
FERMENTING
MASH FLR
MEAL R.
TUB
STILL
DOUBLER
ENG.
GRANARY
FLAKE STAND

Pond

SLOP TROUGH

SLOP TUBS

CATTLE SHED

VACANT FIELDS

VACANT

RICHARD CUMMINS — Also run as
R. CUMMINS & CO. - BALLARD & LANCASTER
Registered Distillery, No 357 - 5th Distr. Marion Co. Ky
PRODUCT - BOURBON AND RYE SOUR MASH WHISKEYS -
CAPCY 204 BUS. - PRODUCE 100 BUS. PER DAY - RUN 5 MONTHS IN YEAR -
FRAME BLDG - METAL ROOF - FIRE AND STEAM DOUBLER -
NO WATCHMAN - LIGHTS KEROSENE LANTERNS - HEAT STOVE IN OFFICE AND YEAST RM.
FUEL COAL - 100' 1 1/2" HOSE -

BONDED WARE HO. (45'x70') CAPCY 2000 BBLS - PAT. RACKS - 9 TIERS -
BRICK BLDG - METAL ROOF - IRON CLAD SHUTS ALL SIDES -
DO. DO. (45'x100') " 3600 BBLS - PAT. RACKS - 9 TIERS -
FRAME BLDG - IRONCLAD - METAL ROOF.
NO WATCHMAN - NO HERTING - LIGHTS CANDLES -
WARE HOUSES USED FOR STORAGE ONLY -

Scale of Feet.
50 40 30 20 10 0 50 100 150

PURDY & CO.
Registered Distillery No 376 - 5th Distr. Marion Co. KY
PRODUCT - BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 100 BUS. - PRODUCE 40 BUS. PER DAY - RUN 5 MO's IN YEAR
FRAME BLDG - SHINGLE ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - HEAT STOVE IN OFFICE ONLY - FUEL WOOD -
NO LIGHTS - NO FIRE APPLIANCES -

BONDED WARE HO. CAPCY 1512 BBLS - PAT. RACKS - 9 TIERS
FRAME BLDG - METAL ROOF - NO WATCHMAN - NO HEATING
NO LIGHTS
USED FOR STORAGE ONLY -

Situated near
BRADFORDSVILLE
13 Miles S.E. of LEBANON
and 8 Miles S. of RILEY STATION

HUSTONVILLE AND BRADFORDSVILLE PIKE

COOPER SHOP

SHED

BONDED WARE HO.
CAP. 1512 BBLS
PAT. RACKS - 9 TIERS
USED FOR STORAGE ONLY
IRONCLAD BLDG
28' x 60' - 24' TO EAVES

LANE

WHISKEY PIPE

OFFICE

DISTILLERY

CORN CRIB

MASH FLR
MEAL FLR
ENG. 30 HP.

SLOP TROUGH

WATER TANK

FLAKE STAND

CATTLE SHED

Rolling Fork

KENTUCKY, 5TH DISTRICT

SAMUEL'S DISTILLING CO.

Formerly W. B. SAMUELS & CO.

Registered Distillery No. 241. - 5th Distr. Nelson Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY -
CAPCY 200 BUSHELS PER DAY - RUN ABOUT 7 MONTHS OF YEAR -
FRAME BUILDING METAL AND COMPOSITION ROOF -
FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS, CLOSED KEROS. LAMPS -
FUEL COAL AND WOOD - 100' 1¼" HOSE -

BONDED WARE HO. No. 1. CAPCY 3000 BBLS - PATENT RACKS - 9 TIERS -
Do. Do. No. 2. " 3000 " " " 9 "
Do. Do. No. 3. " 4000 " " " 10 "
FRAME BUILDG - IRON CLAD - METAL ROOF -
NO WATCHMAN - NO HEATING - LIGHTS, CANDLES -
WARE HOS. USED FOR STORAGE ONLY -

At SAMUELS DEPOT
6 Miles N.W. of BARDSTOWN KY.

FELIX G. WALKER

Registered Distillery No. 410, 5th Distr. Nelson Co., Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY 249 BUSHELS PER DAY - RUN 5 MONTHS OF YEAR -
FRAME BUILDING METAL AND COMPOSITION ROOF -
FIRE UNDER DOUBLER -
NO WATCHMAN - LIGHTS, KEROS. LAMPS - HEAT STOVES -
FUEL COAL AND WOOD - 50' 1¼" HOSE -

BONDED WARE HO. No. 1. CAPCY 2580 BBLS - PAT. RACKS - 6 TIERS -
Do. Do. No. 2. " 2580 " " " 6 "
FRAME BUILDINGS - IRON CLAD - METAL ROOF
NO WATCHMAN - NO HEATING - LIGHTS, CANDLES -
WARE HOS. USED FOR STORAGE ONLY -

Situated One Mile W. of
BARDSTOWN KY.

BARDSTOWN AND BOSTON TURN PIKE

THOS. S. MOORE

Registered Distillery No. 355. - 5th Distr. Nelson Co. Ky.

Also Run as CLEVELAND DISTILLING CO. -
COLD SPRING Do. Do. -
LEE McGEE - TOM MOORE -

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY -
CAPCY 100 BUSHELS PER DAY - RUN 6 MONTHS OF YEAR -
FRAME BUILDING - COMPOSITION ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - MAN SLEEPS IN DISTILLERY -
LIGHTS KEROS. LANTERNS - FUEL COAL AND WOOD
HEAT STOVE IN YEAST ROOM AND OFFICE -
30' 1¼" HOSE -

BONDED WARE HO. No. 1. CAPCY 4000 BBLS - PAT RACKS 10 TIERS -
FRAME BUILDING - IR. CLAD - METAL RF. -
Do. Do. No. 2. CAPCY 3500 BBLS - PAT RACKS - 7 TIERS -
FRAME BUILDING METAL ROOF -
NO WATCHMAN - NO HEATING -
LIGHTS CANDLES, USED ONLY OCCASIONALLY
WARE HOS. USED FOR STORAGE ONLY -

Situated One Mile S. of
BARDSTOWN KY.

NEWHAVEN AND BARDSTOWN PIKE

MATTINGLY & MOORE - SIMMS & EDELEN

Registered Distillery No. 272. - 5th Distr. Nelson Co. Ky.

PRODUCTION, BOURBON & RYE SOUR MASH WHISKEYS (HAND MADE)
CAPCY 300 BUSHELS PER DAY - RUN 7 MONTHS OF YEAR -
FRAME BUILDING METAL AND SHINGLE ROOF - FIRE AND STEAM DOUBLER -
NO WATCHMAN - HEAT STOVE IN YEAST RM AND OFFICE
LIGHTS, KEROS CLOSED LAMPS - FUEL COAL AND WOOD
100' 1¼" HOSE

BONDED WARE HO. "B" CAPCY 3000 BBLS - PAT. RACKS - 6 TIERS - BRICK AND STONE BUILDING METAL ROOF
Do. Do. "C" " 3000 " " " 10 " FRAME BUILDG - IRON CLAD - METAL ROOF
Do. Do. "D" " 5000 " " " 10 " " " IRON CLAD " "
FREE WARE HO. "A" " 800 - No RACKS BRICK " " "
Do. Do. "B" " 500 " " " FRAME " IRON CLAD " "
NO WATCHMAN - LIGHTS, CANDLES - NO HEATING -
WARE HOUSES USED FOR STORAGE ONLY -

FREE WARE HO. "B" CAP. 500 BBLS - NO RACKS - USED FOR STORAGE ONLY -

Situated One Mile S.W. of
BARDSTOWN KY.

BONDED WARE HO. "C" CAPCY 8000 BBLS - PAT. RACKS - 10 TIERS - USED FOR STORAGE ONLY -
65' x 159' IRON CLAD BLDG 70 TO EAVES -

ELEVATION ABOUT 45' ABOVE CENTRE OF DISTILLERY

HILL SIDE

NEWHAVEN AND BARDSTOWN PIKE

FREE WARE HO. "A" CAP. 800 BBLS - NO RACKS - USED FOR STORAGE ONLY -

BONDED WARE HO. "D" CAP. 5000 BBLS - PAT. RACKS - 10 TIERS - USED FOR STORAGE ONLY -
46' x 100' IRON CLAD BLDG 22 TO EAVES -

BONDED WARE HO. "A" CAPCY 3000 BBLS - PAT. RACKS - 6 TIERS - USED FOR STORAGE ONLY -
66' x 79' 15' TO EAVES -

BONDED WARE HO. No. 2. CAPCY 2500 BBLS - PAT. RACKS - 7 TIERS - USED FOR STORAGE ONLY -
57' x 67' 26 TO EAVES -

Scale of Feet.
50 40 30 20 10 0 50 100 150

1894.
NEXT PAGE 40

KENTUCKY 5TH DISTRICT

WATHEN, MUELLER AND CO.-"ROLLING FORK DISTILLERY" AND CHAS. KOBERT AND CO.-"CUMBERLAND DISTILLERY"

ALSO FOR 2D MOORE AND GRISBY DISTILLING CO.

NIGHT WATCHMAN. HEAT STOVES & OPEN GRATES. LIGHTS OILS.
FUEL COAL.— WATER SUPPLY FROM WELL & PONDS.
200' OF 1¼" HOSE IN EACH DISTILLERY. STEAM DOUBLERS.

L. & N. R. R.

CUMBERLAND DISTILLERY
Registered Distillery No 299, 5th Distr.- Marion Co. Ky.

PRODUCTION BOURBON AND RYE SOUR MASH WHISKEY.
CAPCY. 106 BUS. PER DAY.- RUN 6 MONTHS PER YEAR

FRAME BUILDING. METAL ROOF.
HEAT STOVE IN YEAST ROOM.

ROLLING FORK DISTILLERY
Registered Distillery No 270, 5th Distr.- Marion Co. Ky.

PRODUCTION BOURBON, RYE & MALT SWEET MASH WHISKEY
CAPCY. 432 BUS. PER DAY.- RUN 6 MONTHS PER YEAR

BRICK BUILDING. METAL ROOF.
HEAT OPEN GRATE IN OFFICE

Situated ½ mile West of LEBANON KY.

WARE HOUSES

CHAS. KOBERT AND CO. BONDED WARE HO. No 299. CAPCY. 6000 BBLS. PAT. RACKS 10 TIERS.
WATHEN, MUELLER AND CO. " " No 270-A" " 10000 " " " 12 "
" " " " " No 270-C" " 10000 " " " 12 "
FREE " — " 5000 " " " 10 "
FRAME BUILDINGS. METAL ROOF. CORR. IR. CLAD ALL SIDES.
NIGHT WATCHMAN. NO HEATING. LIGHTS CANDLES.
WARE HOUSES USED FOR STORAGE ONLY.

R. B. LANCASTER
Registered Distillery No 263, 5th Distr.- Marion Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY—
CAPCY. 100 BUS. PER DAY.- RUN 5 MONTHS PER YEAR.

FRAME BUILDING. SHINGLE ROOF.
NO WATCHMAN. NO HEATING. FUEL COAL.
LIGHTS. KEROSENE, CLOSED LAMPS.
FIRE UNDER DOUBLER.- 100' OF 1" HOSE.

Situated ½ Mile West of LEBANON KY.

BONDED WARE HO. CAPCY. 5000 BBLS. PAT. RACKS 7 TIERS.
FRAME BUILDING. METAL ROOF.
NO WATCHMAN. NO HEATING.
LIGHTS CANDLES.
USED FOR STORAGE ONLY.

BLAIR AND BALLARD
Registered Distillery No 375, 5th Distr.- Marion Co. Ky.

AT CHICAGO
12 Miles W. of LEBANON KY.

PRODUCTION BOURBON SOUR MASH WHISKEY.
CAPCY. 62 BUS. PER. DAY.- RUN 5 MONTHS PER YEAR.

FRAME BUILDING SHINGLE ROOF.
NO WATCHMAN. FUEL COAL. NO LIGHTS.
HEAT STOVE IN OFFICE. FIRE DOUBLER

BONDED WARE HO. CAPCY 4500 BBLS. PAT. RACKS. 9 TIERS.
FRAME BUILDING. METAL ROOF.
NO WATCHMAN. NO LIGHTS. NO HEATING

Scale of Feet.

1894

KENTUCKY 6th DISTRICT

40

VACANT FIELDS

CATTLE SHED

the RICHWOOD DISTILLERY CO. HARRY M. LEVY PROP'R

Registered Distillery No 63 - 6th Distr. Trimble Co. Ky.

Formerly Known as SNYDER BROS
JAMES O. SNYDER - H. M. LEVY

PRODUCTION BOURBON & RYE WHISKEY -
POWER MADE SOUR MASH PROCESS -
WASHING CAPCY 1300 BUSHELS PER DAY -
DISTILLING " 180 BBLS - " "
OPERATED 12 MONTHS OF YEAR-RUN DAILY -
BUILDINGS KEPT CLEAN & IN GOOD REPAIR -
WARE HOUSES NOT HEATED ABOVE 75° FAHRENHEIT -
NIGHT WATCHMAN - FUEL COAL-POWER STEAM -
LIGHTS HEADLIGHT & LARD OIL MIXED IN LANTERNS
STEAM HEAT IN WARE HOUSES AS NOTED -
ONE STOVE IN OFFICE-NO OTHER HEATING -
350'12" LINEN HOSE CAN BE ATTACHED TO 4" PIPE & F PUMP AS SHOWN IN MILL - FIRE PAILS ALL THROUGH
WATER SUPPLY FROM DRIVEN WELLS -
NO OTHER FIRE APPLIANCES -

PREVAILING WINDS NORTH WEST -

WARE HOUSES

BONDED WARE HO. NO 1 CAPCY 20000 BBLS - PAT RACKS - 42 TIERS - STEAM HEAT -
" " " NO 2 " 45000 " " " 42 " " "
FREE " " " 3700 " " " 32 " NO HEATING -

FREE WARE HO.
CAPCY 3700 BBLS - PAT RACKS - 32 TIERS -
NO HEATING -
1" POPLAR STRIPS ON 3'x8' OAK STUDDING -
IN CLAD ALL SIDES
40'x141'

DISTILLERY

MASH HO.

MILL

BOILER HO.

BONDED WARE HO. NO 1.
CAPCY 20000 BBLS - PAT RACKS - 42 TIERS -
STEAM HEAT - PIPES HUNG ON BRACKETS -
ALL SHUTTERS STANDARD IRON CLAD
NO FINISH ON WALLS
94' x 210'

BONDED WARE HO. NO 2.
CAPCY 45000 BBLS - PAT RACKS - 42 TIERS -
STEAM HEAT - PIPES HUNG ON BRACKETS -
ALL SHUTTERS STANDARD IRON CLAD
NO FINISH ON WALLS
125'8" x 210'

BRANDING HO.
32'x63'

CISTERN No 1 45'
BARREL STORAGE 1ST
22' x 69'

CHARRED STAVE STORAGE 1ST OFFICE

WAGON HOUSE & FARM BUILDINGS (OLD)
40'x108'

SPRING HO.

PRIVATE
30'x40'

Situated
One Mile E. of MILTON P. O.

PIKE

MILTON

Ohio River

VACANT BEYOND

Scale of Feet.
50 40 30 20 10 0 50 100 150

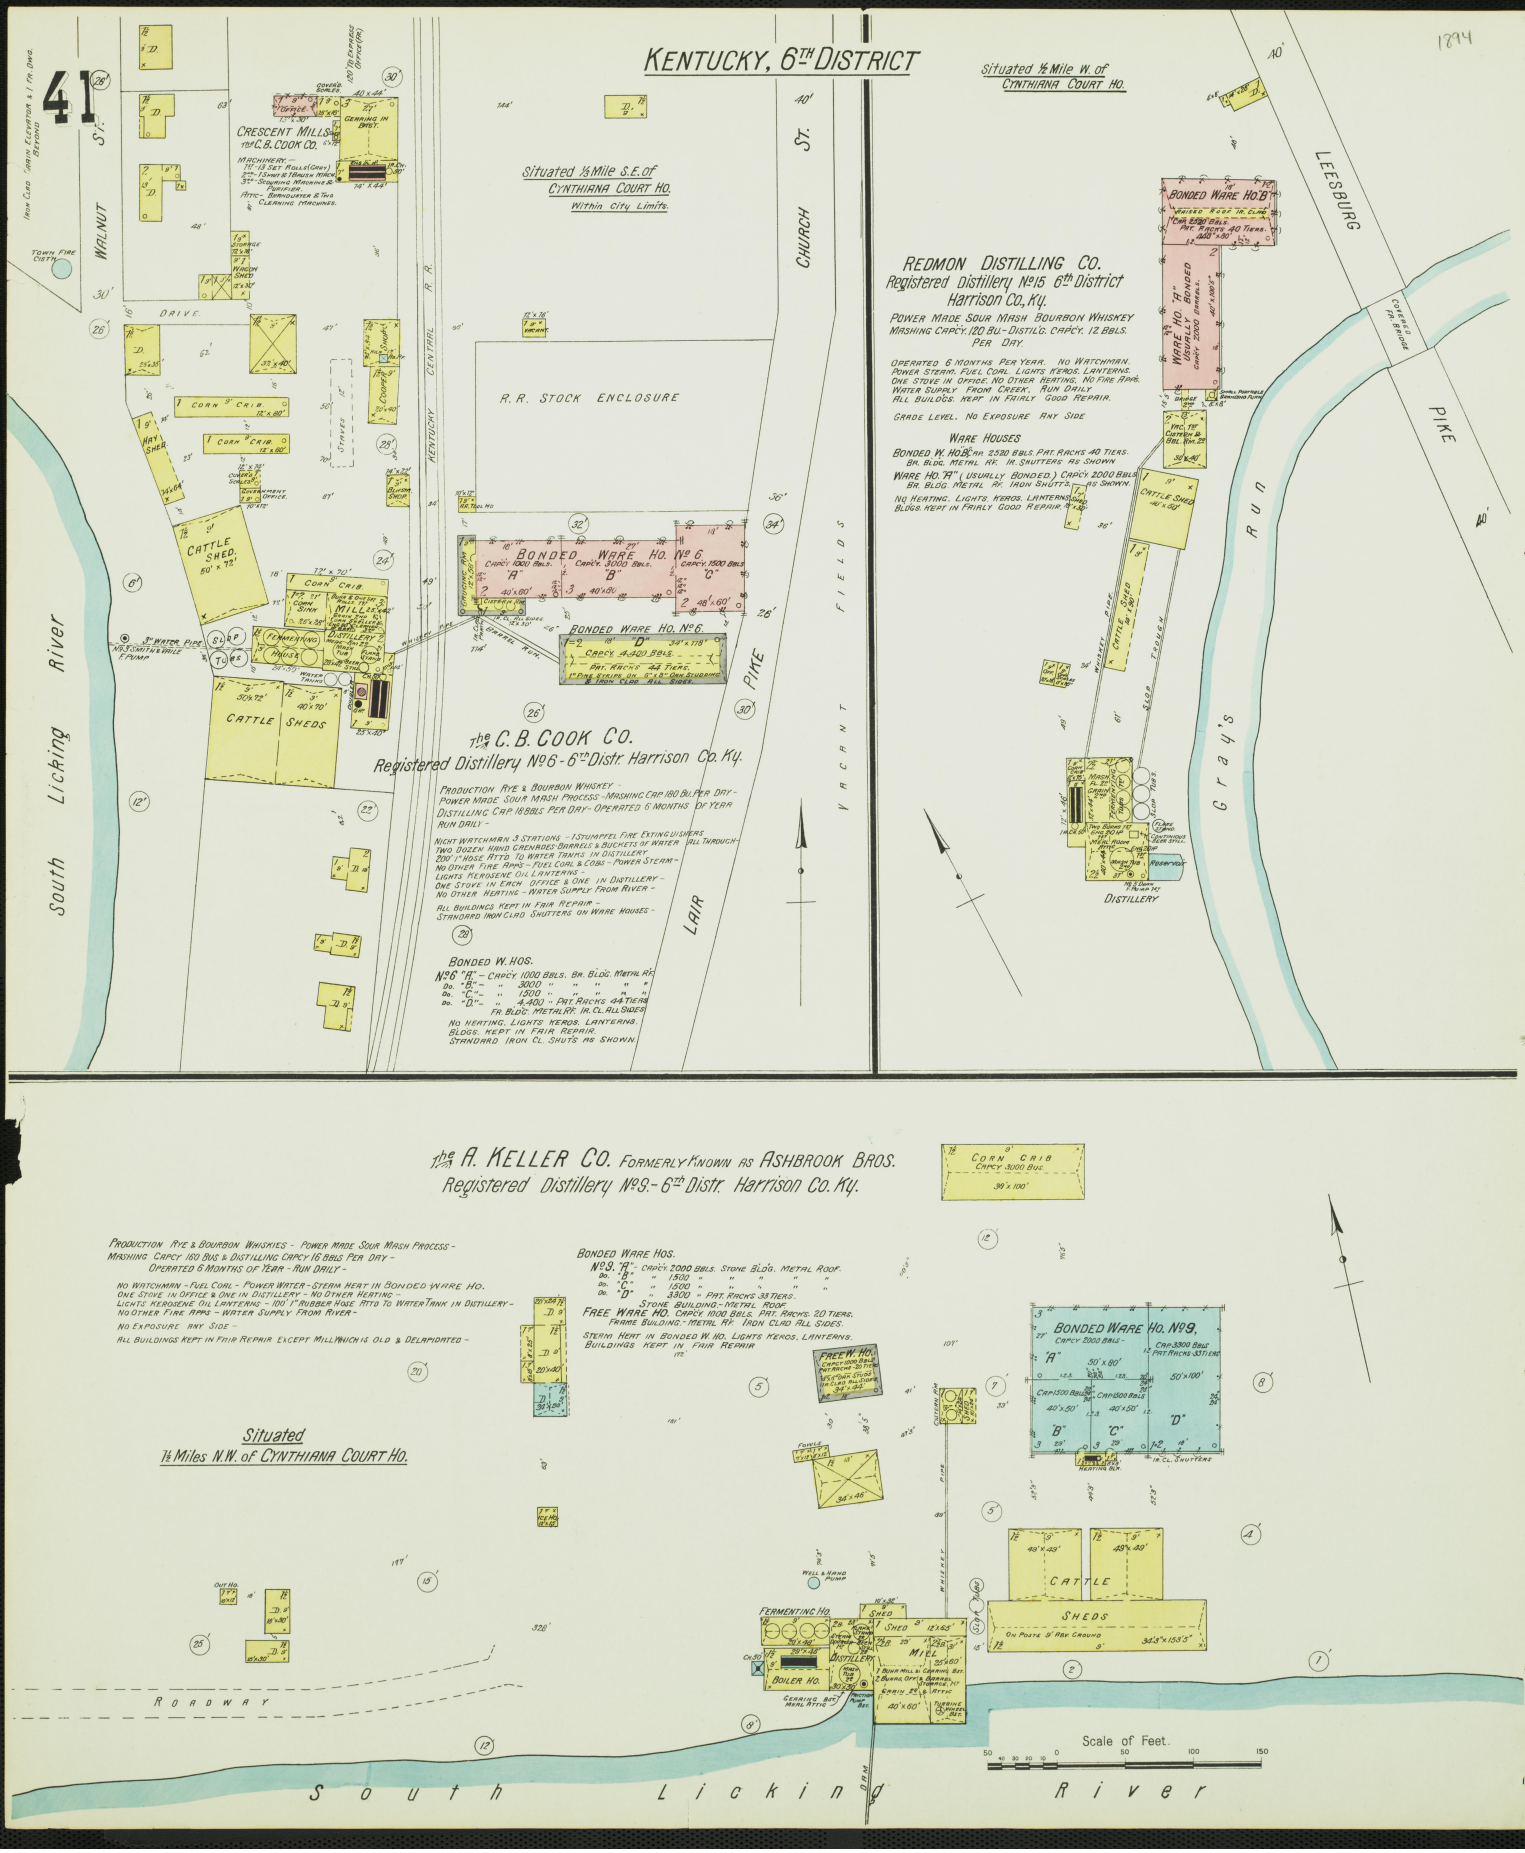
41
KENTUCKY, 6TH DISTRICT
Situated ½ Mile S.E. of Cynthiana Court Ho.
Within City Limits.
Situated ½ Mile W. of Cynthiana Court Ho.
CRESCENT MILLS
The C.B. COOK CO.
R.R. STOCK ENCLOSURE
BONDED WARE HO. No 6.
BONDED WARE HO. No 6.
The C. B. COOK CO.
Registered Distillery No 6 - 6th Distr. Harrison Co. Ky.
REDMON DISTILLING CO.
Registered Distillery No 15 6th District
Harrison Co, Ky.
BONDED WARE HO. B
WARE HO. "A" BONDED (USUALLY BONDED.)
DISTILLERY
The A. KELLER CO. FORMERLY KNOWN AS ASHBROOK BROS.
Registered Distillery No 9. - 6th Distr. Harrison Co. Ky.
BONDED WARE HO. No 9.
Situated
1½ Miles N.W. of Cynthiana Court Ho.
ROADWAY
South Licking River
Gray's Run
Scale of Feet.

KENTUCKY 6TH DISTRICT

F. G. CRAIG
Registered Distillery No 17 - 6th Distr. Harrison Co. Ky.

PRODUCT BOURBON WHISKEY - POWER MADE SOUR MASH PROCESS - MASHING CAPCY 200 BUSHELS PER DAY - DISTILLING CAPCY 20 BBLS PER DAY. RUN DAILY - OPERATED SIX MONTHS PER YEAR

NO WATCHMAN - NO FIRE APPARATUS - FUEL COAL - POWER STEAM - NO HEATING - LIGHTS KEROS OIL LANTERNS - WATER SUPPLY FROM RIVER -

ALL BUILDINGS KEPT IN FAIR REPAIR EXCEPT DISTILLERY & BOILER NO. WHICH ARE OLD & DILAPIDATED - GRADE LEVEL -

WARE HOUSES.

BONDED WH. NO "A" - CAPCY 1600 BBLS. PAT. RACKS 32 TIERS. STONE BLDG.
" " " "B" - " 2800 " " " 28 " FRAME BLDG.
NO HEATING. LIGHTS KEROS. LANTERNS.
BUILDINGS IN FAIR REPAIR. - METAL ROOFS.

Situated in the town of BERRY

THE WIGLESWORTH - BROS. CO.
Registered Distillery No 10 - 6th Distr. Harrison Co. Ky.

1 Mile E. of POINDEXTER DEPOT
KENTUCKY CENTRAL R.R.

PRODUCTION BOURBON WHISKEY POWER MADE SOUR MASH PROCESS
MASHING CAPCY 100 BUSHELS PER DAY - DISTILG CAP 10 BBLS PER DAY -
OPERATED SIX MONTHS OF YEAR - RUN DAILY -

NO WATCHMAN - NO FIRE APPS - FUEL COAL - POWER WATER & STEAM - LIGHTS KEROSENE OIL LANTERNS - 1 STOVE IN OFFICE, NO OTHER HEATING - WATER SUPPLY FROM RIVER -
BUILDINGS KEPT CLEAN & IN GOOD REPAIR -
GRADE LEVEL - NO EXPOSURE ANY SIDE -

WARE HOUSES.

BONDED WARE NO. NO1 CAPCY 1200 BBLS. NO RACKS. STONE BLDG. METAL RF.
" " " NO2 " 1584 " PAT RACKS. 36 TIERS. FR. BLDG. " "
FREE " " - " 200 " NO RACKS. BR. BUILDING " "
NO HEATING. LIGHTS KEROS. OIL LANTERNS.
BUILDINGS KEPT CLEAN & IN GOOD REPAIR

THE G. R. SHARPE CO.
Registered Distillery No 19 - 6th Distr. Harrison Co. Ky.

PRODUCTION BOURBON WHISKEY - MASHING CAPCY 200 BUSHELS PER DAY - DISTILLING CAPCY 20 BBLS PER DAY - POWER MADE SOUR MASH PROCESS - OPERATED 5 MONTHS OF YEAR - RUN DAILY -

NIGHT WATCHMAN - NO FIRE APPS - POWER STEAM & WATER - NO HEATING - LIGHTS KEROSENE OIL LANTERNS - FUEL COAL. WATER SUPPLY FROM RIVER -
BUILDINGS KEPT IN FAIR CONDITION OF REPAIR -
GRADE LEVEL -

WARE HOUSES

BONDED WARE HO. CAPCY 4160 BBLS. PAT. RACKS 32 TIERS. BR. BLDG. METAL RF. (NO WHISKEY IN BOND)
FREE " " CAPCY 400 BBLS. STONE BLDG. METAL RF.
NO HEATING. LIGHTS. KEROS. OIL LANTERNS.

LACEY, BUCKER, GERALD AND MILLER. MILL CREEK DISTILLERY
AS G. W. TAYLOR CO. FORMERLY KNOWN AS G. W. TAYLOR.
Registered Distillery No 13 - 6th Distr. Harrison Co. Ky.

PRODUCTION BOURBON WHISKEY - POWER MADE SOUR MASH PROCESS - MASHING CAPCY 80 BUSHELS PER DAY - DISTILLING CAPCY 8 BBLS PER DAY - OPERATED 5 MONTHS OF YEAR - RUN DAILY -

NO WATCHMAN - FUEL COAL - POWER STEAM - 1 STOVE IN EACH OFFICE - NO OTHER HEATING - LIGHTS KEROSENE OIL LANTERNS - NO FIRE APPS - WATER SUPPLY FROM WELL & CREEK -
BUILDINGS KEPT IN FAIR REPAIR - STANDARD IRON CLAD SHUTTERS ON WARE HOUSES -
GRADE LEVEL - NO EXPOSURE ANY SIDE

WARE HOUSES

BONDED WARE HO. "A" CAPCY 600 BBLS - NO RACKS - STONE BLDG - METAL RF -
" " " "B" " 1000 " " " " " " "
" " " "C" " 1000 " " " FRAME " " "
NO HEATING - LIGHTS KEROSENE OIL LANTERNS -
BUILDINGS KEPT IN FAIR REPAIR - STANDARD IR CLAD SHUTTERS ON WARE HOUSES -

2½ Miles S.W. of POINDEXTER DEPOT
KENTUCKY CENTRAL R.R.

¼ Mile E. of LAIR DEPOT
KENTUCKY CENTRAL R.R.

VACANT 250' DISTILLERY NO 38' BEYOND

Scale of Feet.

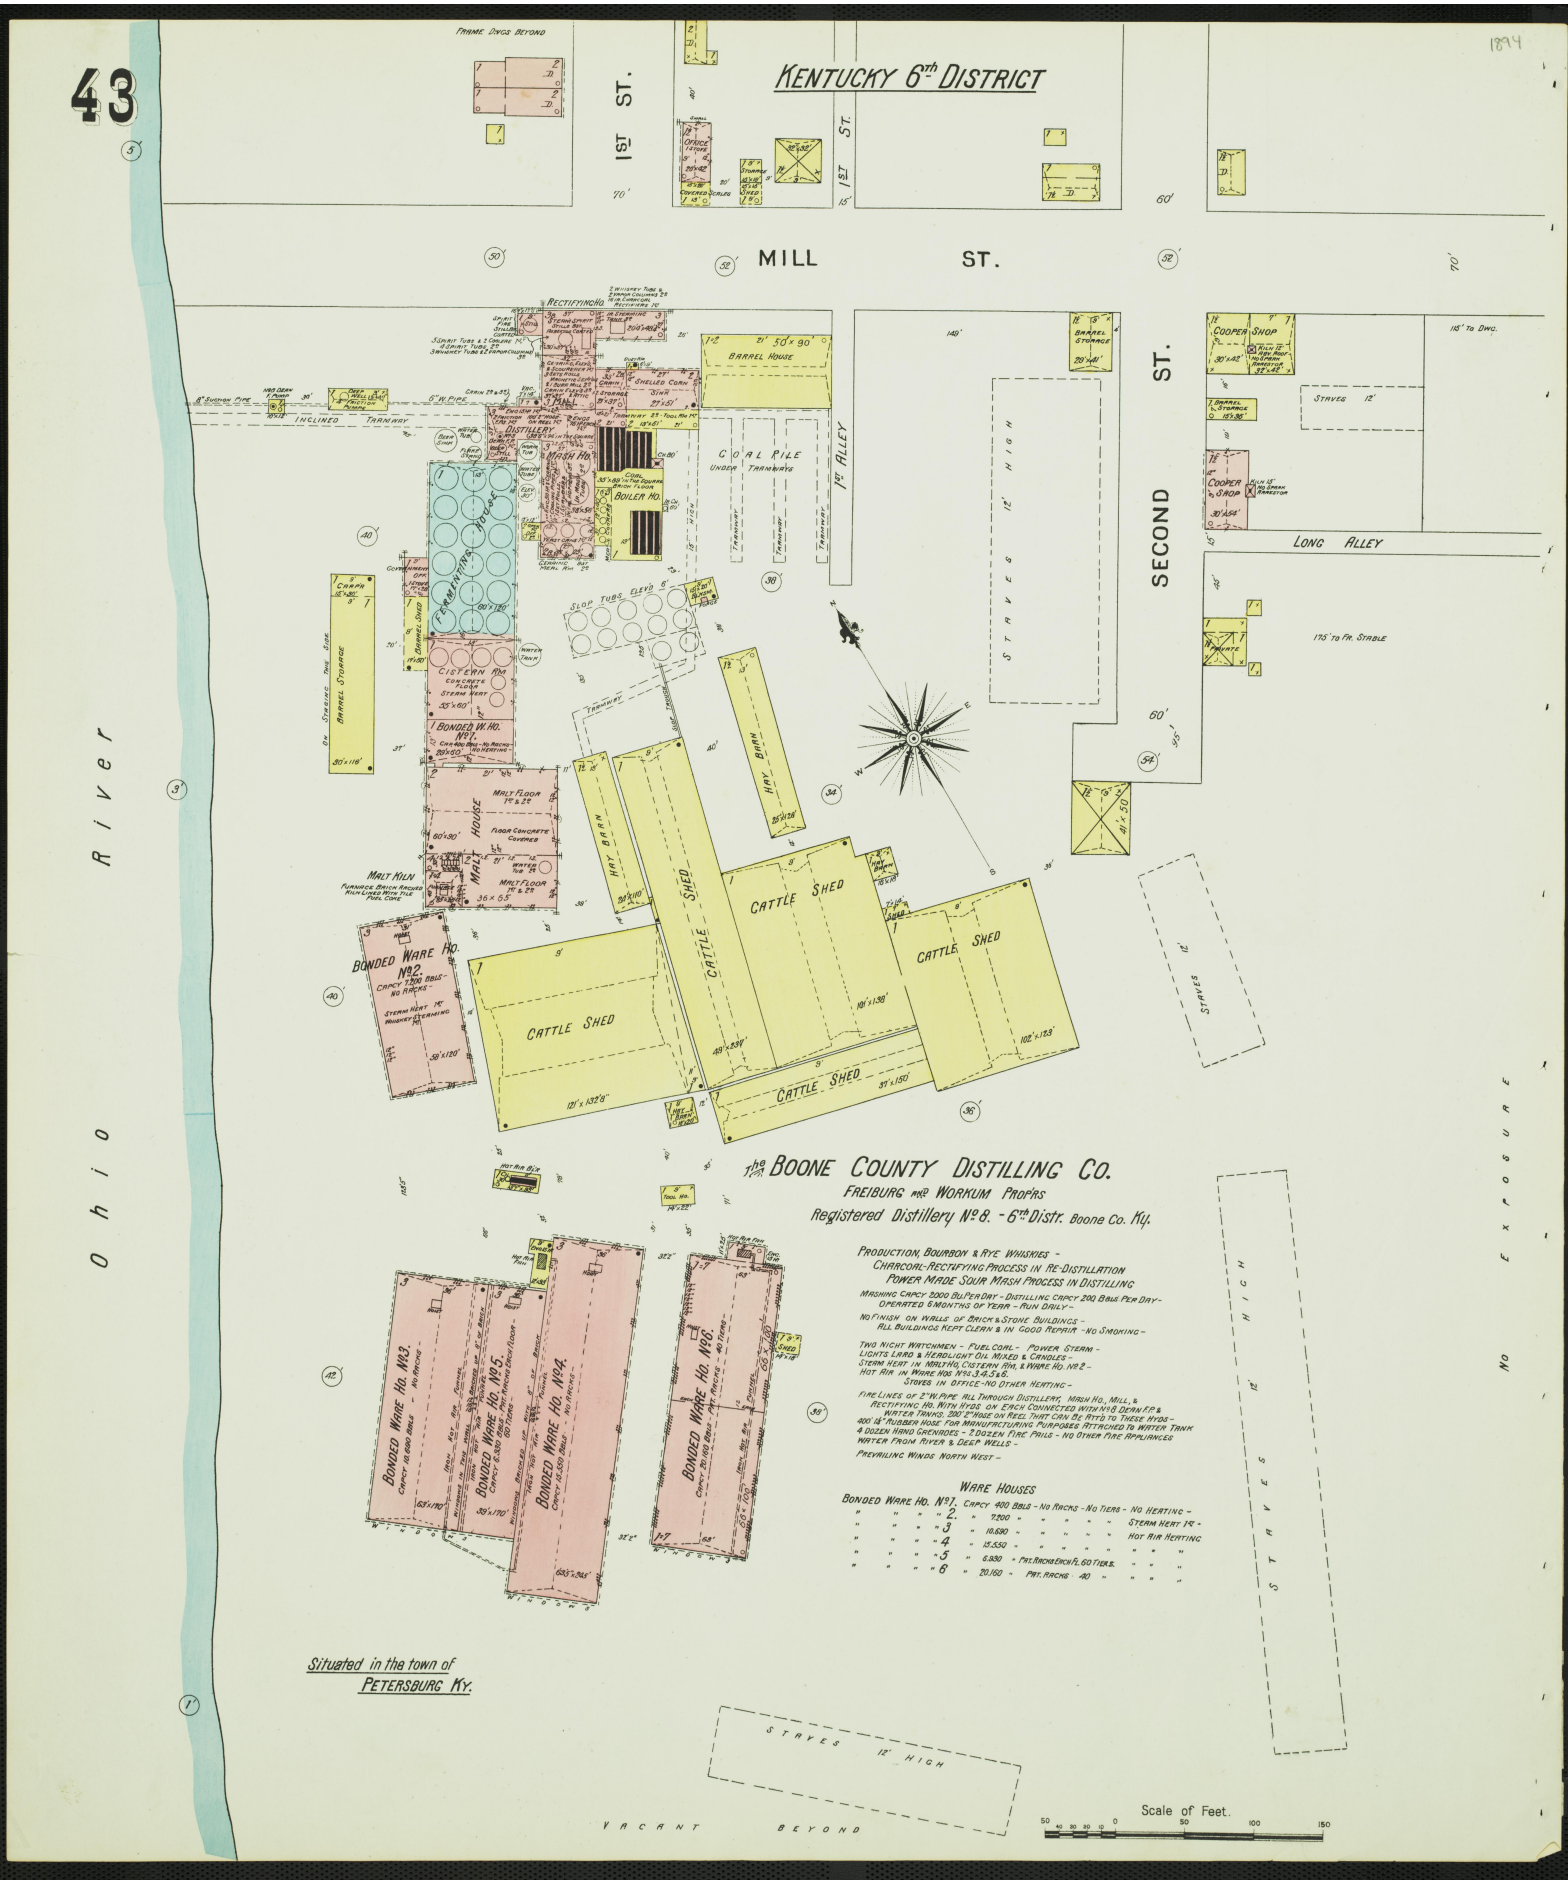

The BOONE COUNTY DISTILLING CO.

FREIBURG AND WORKUM PROP'RS

Registered Distillery No 8. - 6th Distr. Boone Co. Ky.

PRODUCTION, BOURBON & RYE WHISKIES -
CHARCOAL-RECTIFYING PROCESS IN RE-DISTILLATION
POWER MADE SOUR MASH PROCESS IN DISTILLING

MASHING CAPCY 2000 BLS PER DAY - DISTILLING CAPCY 200 BBLS PER DAY -
OPERATED 6 MONTHS OF YEAR - RUN DAILY -

NO FINISH ON WALLS OF BRICK & STONE BUILDINGS -
ALL BUILDINGS KEPT CLEAN & IN GOOD REPAIR - NO SMOKING -

TWO NIGHT WATCHMEN - FUEL COAL - POWER STEAM -
LIGHTS LAMP & HEADLIGHT OIL MIXED & CANDLES -
STEAM HEAT IN MALT HO, CISTERN RM. & WARE HO. No 2 -
HOT AIR IN WARE HOS No 3, 4, 5 & 6.
STOVES IN OFFICE - NO OTHER HEATING -

FIRE LINES OF 2" W. PIPE ALL THROUGH DISTILLERY, MASH HO., MILL, &
RECTIFYING HO. WITH HYDS ON EACH CONNECTED WITH No 8 DEAN F.P. &
WATER TANKS. 200' 2" HOSE ON REEL THAT CAN BE ATT'D TO THESE HYDS -
400' 1½" RUBBER HOSE FOR MANUFACTURING PURPOSES ATTACHED TO WATER TANK
4 DOZEN HAND GRENADES - 2 DOZEN FIRE PAILS - NO OTHER FIRE APPLIANCES
WATER FROM RIVER & DEEP WELLS -

PREVAILING WINDS NORTH WEST -

WARE HOUSES

BONDED WARE HO. No 1.	CAPCY 400 BBLS	- NO RACKS	- NO TIERS	- NO HEATING -	
" " " " 2.	" 7.200 "	" "	" "	STEAM HEAT 1ST -	
" " " " 3	" 10.690 "	" "	" "	HOT AIR HEATING	
" " " " 4	" 15.550 "	" "	" "	" " "	
" " " " 5	" 6.930 "	PAT. RACKS EACH FL.	60 TIERS.	" " "	
" " " " 6	" 20.160 "	PAT. RACKS	40 "	" " "	

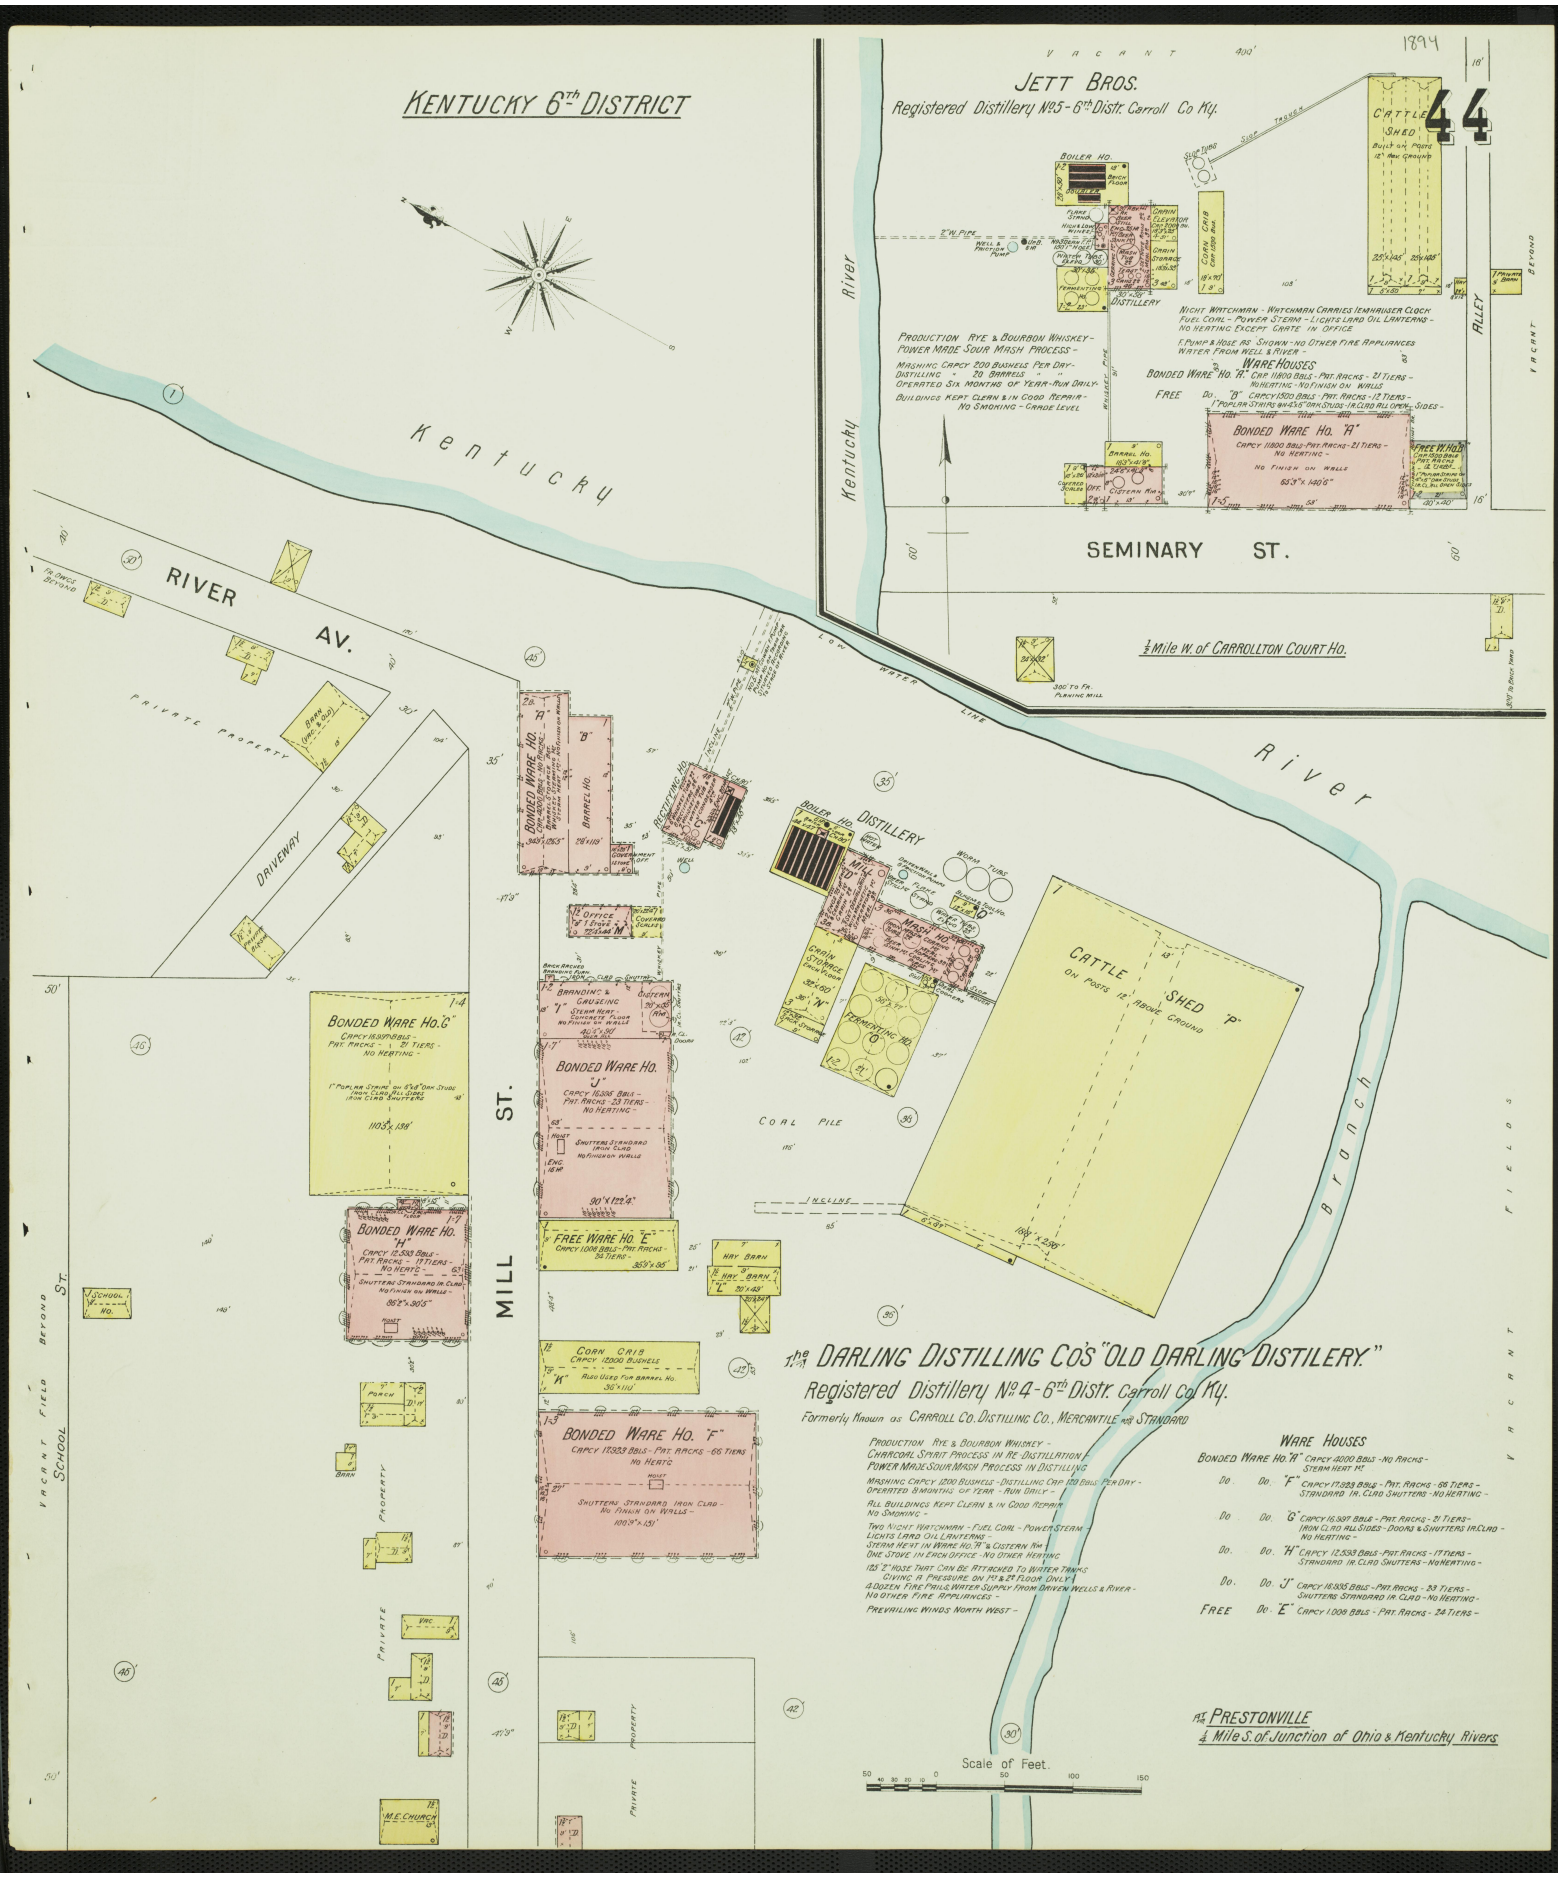

KENTUCKY 6th DISTRICT
JETT BROS.
Registered Distillery No. 5 - 6th Distr. Carroll Co Ky.
1894
44
VACANT
CATTLE SHED
BOILER HO.
CORN CRIB
DISTILLERY
PRODUCTION RYE & BOURBON WHISKEY - POWER MADE SOUR MASH PROCESS -
MASHING CAPCY 200 BUSHELS PER DAY - DISTILLING 20 BARRELS - OPERATED SIX MONTHS OF YEAR - RUN DAILY -
BUILDINGS KEPT CLEAN & IN GOOD REPAIR - NO SMOKING - GRADE LEVEL
NIGHT WATCHMAN - WATCHMAN CARRIES LEMHAUSER CLOCK
FUEL COAL - POWER STEAM - LIGHTS LARD OIL LANTERNS - NO HEATING EXCEPT GRATE IN OFFICE
F. PUMP & HOSE AS SHOWN - NO OTHER FIRE APPLIANCES
WATER FROM WELL & RIVER -
WARE HOUSES
BONDED WARE HO. "A" CAP. 11800 BBLS - PAT. RACKS - 21 TIERS - NO HEATING - NO FINISH ON WALLS
FREE DO. "B" CAPCY 1500 BBLS - PAT. RACKS - 12 TIERS - 1" POPLAR STRIPS ON 4"x6" OAK STUDS - IR. CLAD ALL OPEN SIDES -
BONDED WARE HO. "A"
CAPCY 11800 BBLS - PAT. RACKS - 21 TIERS - NO HEATING -
NO FINISH ON WALLS
63'3" x 140'6"
FREE W. HO. "B"
SEMINARY ST.
Kentucky River
ALLEY
VACANT BEYOND
½ Mile W. of CARROLLTON COURT HO.
300' TO FR. PLANING MILL
LOW WATER LINE
River
RIVER AV.
PRIVATE PROPERTY
DRIVEWAY
BONDED WARE HO. "A"
BARREL HO.
"B"
OFFICE
COVERED SCALES
BONDED WARE HO. "G"
CAPCY 16,997 BBLS - PAT. RACKS - 21 TIERS - NO HEATING -
1" POPLAR STRIPS ON 6"x8" OAK STUDS IRON CLAD ALL SIDES IRON CLAD SHUTTERS
110'5" x 139'
BONDED WARE HO. "H"
CAPCY 12,593 BBLS - PAT. RACKS - 17 TIERS - NO HEATG -
SHUTTERS STANDARD IR. CLAD - NO FINISH ON WALLS -
86'2" x 90'5"
BONDED WARE HO. "I"
BARNDING & GAUGEING
STEAM HEAT - CONCRETE FLOOR - NO FINISH ON WALLS
BONDED WARE HO. "J"
CAPCY 16,595 BBLS - PAT. RACKS - 23 TIERS - NO HEATING -
SHUTTERS STANDARD IRON CLAD - NO FINISH ON WALLS
90' x 122'4"
FREE WARE HO. "E"
CAPCY 1,008 BBLS - PAT. RACKS - 24 TIERS -
35'9" x 95'
HAY BARN
CORN CRIB
CAPCY 12,000 BUSHELS
ALSO USED FOR BARREL HO.
36' x 110'
BONDED WARE HO. "F"
CAPCY 17,923 BBLS - PAT. RACKS - 66 TIERS - NO HEATG
SHUTTERS STANDARD IRON CLAD - NO FINISH ON WALLS -
100'9" x 151'
MILL ST.
COAL PILE
INCLINE
CATTLE SHED "P"
ON POSTS 12' ABOVE GROUND
Branch
VACANT FIELDS
VACANT FIELD BEYOND
SCHOOL ST.
SCHOOL HO.
PORCH
BARN
PRIVATE PROPERTY
M.E. CHURCH
The DARLING DISTILLING CO'S "OLD DARLING DISTILERY."
Registered Distillery No. 4 - 6th Distr. Carroll Co. Ky.
Formerly Known as CARROLL CO. DISTILLING CO., MERCANTILE AND STANDARD
PRODUCTION RYE & BOURBON WHISKEY - CHARCOAL SPIRIT PROCESS IN RE-DISTILLATION - POWER MADE SOUR MASH PROCESS IN DISTILLING
MASHING CAPCY 1200 BUSHELS - DISTILLING CAP. 120 BBLS PER DAY - OPERATED 8 MONTHS OF YEAR - RUN DAILY -
ALL BUILDINGS KEPT CLEAN & IN GOOD REPAIR - NO SMOKING -
TWO NIGHT WATCHMAN - FUEL COAL - POWER STEAM - LIGHTS LARD OIL LANTERNS - STEAM HEAT IN WARE HO. "A" & CISTERN RM. - ONE STOVE IN EACH OFFICE - NO OTHER HEATING
125' 2" HOSE THAT CAN BE ATTACHED TO WATER TANKS GIVING A PRESSURE ON 1st & 2d FLOOR ONLY
4 DOZEN FIRE PAILS, WATER SUPPLY FROM DRIVEN WELLS & RIVER - NO OTHER FIRE APPLIANCES -
PREVAILING WINDS NORTH WEST -
WARE HOUSES
BONDED WARE HO. "A" CAPCY 4000 BBLS - NO RACKS - STEAM HEAT HT.
DO. DO. "F" CAPCY 17,923 BBLS - PAT. RACKS - 66 TIERS - STANDARD IR. CLAD SHUTTERS - NO HEATING -
DO. DO. "G" CAPCY 16,997 BBLS - PAT. RACKS - 21 TIERS - IRON CLAD ALL SIDES - DOORS & SHUTTERS IR. CLAD - NO HEATING -
DO. DO. "H" CAPCY 12,593 BBLS - PAT. RACKS - 17 TIERS - STANDARD IR. CLAD SHUTTERS - NO HEATING -
DO. DO. "J" CAPCY 16,595 BBLS - PAT. RACKS - 23 TIERS - SHUTTERS STANDARD IR. CLAD - NO HEATING -
FREE DO. "E" CAPCY 1,008 BBLS - PAT. RACKS - 24 TIERS -
At PRESTONVILLE
¼ Mile S. of Junction of Ohio & Kentucky Rivers
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY, 6TH DISTRICT

Flour Creek

South Fork of Licking River

J. DUCKER AND SON.
Registered Distillery No 31, 6th District
Pendleton Co., Ky.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
MASHING CAPCY. 24 BUS. & DISTILLING CAPCY. 2½ BBLS PER DAY
RUN DAILY, 3 MONTHS PER YEAR.

NO WATCHMAN. STOVE IN OFFICE. NO OTHER HEATING.
HAND POWER. LIGHTS KEROS. OIL LANTERNS. FUEL WOOD
NO FIRE APPS. BUILDINGS KEPT IN FAIR REPAIR.
GRADE LEVEL - NO EXPOSURE ANY SIDE

Situated 2 Miles S.E. of BUTLER DEPOT Kentucky Central R.R.

O. W. COWLES.
Registered Distillery No 30, 6th District.
Pendleton Co., Ky.

Situated ¾ Miles West of BUTLER DEPOT Kentucky Central R.R.

D.W. COWLES, BONDED WARE HO. of DISTILLERY No 30.

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
MASHING CAPCY 30 BUS. & DISTILLING CAPCY 3 BBLS. PER DAY
RUN DAILY - 5 MONTHS PER YEAR.

NO WATCHMAN. POWER STEAM. STOVE IN OFF. NO OTHER HEATING
FUEL WOOD & COAL. LIGHTS KEROS. OIL LANTERNS.
NO FIRE APPS. BUILDINGS KEPT IN FAIR REPAIR.
GRADE LEVEL - NO EXPOSURE ANY SIDE

BONDED WARE HO. 22'x44' (SEE ABOVE) CAPCY. 450 BBLS.
PAT. RACKS. - NO HEATING
" " " 15'x73' CAPCY. 300 BBLS. " "
OLD & TO BE TORN DOWN

Situated ½ Mile N.W. of FALMOUTH COURT HO.

CHIPMAN AND RIGGLE, Successors to R.B. McDONALD.
FLOUR AND FEED MILL
Registered Distillery No 14, 6th District.
Pendleton Co., Ky.

HAND MADE SOUR MASH BOURBON WHISKEY
30 BUS. MASHED & 3 BBLS. DISTILLED DAILY.
RUN DAILY, 6 MONTHS PER YEAR.

5TH ST.

UPPER MILL ST.

WATER ST.

NO WATCHMAN. LIGHTS KEROS. LANTERNS
HEAT STEAM IN FLOUR MILL. NO OTHER HEATING
FUEL COAL IN BOILER HO. WOOD IN DISTILY.
STOVE IN OFFICE.
50' 1" HOSE IN DISTILLERY THAT CAN BE
ATTD. TO WATER TANK.
NO OTHER FIRE APPARATUS.
WATER SUPPLY FROM MILL.
MAGNETIC SEPARATORS ON ALL ROLLS
IN FLOUR & FEED MILL.
BUILDINGS CLEAN & IN GOOD REPAIR.
GRADE LEVEL

WARE HOUSES
BONDED WARE HO. "A" CAPCY. 360 BBLS. PAT. RACKS 12 TIERS.
" " " "B" " 540 " " " 18 "
FREE " " "B" " 180 " " " 6 "
FRAME BLDGS. METAL RF-IN. CL. ALL SIDES. NO HEATING.

Situated 2 Miles S.E. of BUTLER DEPOT Kentucky Central R.R.

PERRY DUCKER
Registered Distillery No 22, 6th Distr.
Pendleton Co., Ky.

BUTLER PIKE

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY.
MASHING CAPCY. 24 BUS. & DISTILLING CAPCY. 2½ BBLS PER. DAY.
RUN DAILY, 5 MONTHS PER YEAR

No WATCHMAN. POWER STEAM.
FUEL WOOD. STOVE IN OFF. NO OTHER HEATING
LIGHTS KEROS. OIL LANTERNS.
NO FIRE APPS - BLDGS. KEPT IN FAIR REPAIR.

VACANT BEYOND

Situated 2 Miles N.W. of MORGAN DEPOT Kentucky Central R.R.

J.J. BRANN
Registered Distillery No 12, 6th District
Pendleton Co., Ky.

Pond

Brush Branch

PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY
MASHING CAPCY. 24 BUS. & DISTILLING CAPCY. 2½ BBLS. PER DAY.
RUN DAILY - 5 MONTHS PER YEAR.

NO WATCHMAN. POWER STEAM.
NO HEATING. EXCEPT STOVE IN OFFICE.
LIGHTS KEROS. OIL LANTERNS.
FUEL WOOD. BUILDINGS ALL NEW.
NO EXPOSURE ANY SIDE. - GRADE LEVEL.
NO FIRE APP.

VACANT FIELDS

Situated ½ mile North of CYNTHIANA COURT HO.

The F.S. ASHBROOK Incorporated "OLD VAN HOOK DISTILLERY"
Registered Distillery No 35, 6th District - Harrison Co., Ky.

PRODUCTION, BOURBON WHISKEY. MASHING CAPCY. 200 BUS. &
DISTILLING CAPCY 20 BBLS PER DAY - RUN DAILY, 6 MONTHS PER YEAR.

NIGHT WATCHMAN & CLOCK-A-STATIONS. POWER STEAM. FUEL COAL.
NO HEATING EXCEPT ONE STOVE IN EACH OFF. CE. NO FIRE APPS.
WATER SUPPLY FROM RIVER & BRANCH
ALL BUILDINGS KEPT CLEAN & IN GOOD REPAIR.
LIGHTS KEROS. OIL LANTERNS GRADE LEVEL.

N. MAIN ST.

WARE HOUSES
BONDED W. HO. "A" CAPCY 4000 BBLS. PAT. RACKS 62 TIERS.
" " " B " 1452 " " " 22 "
" " " C " 4000 " " " 40 "
FREE " " CAPCY 1900 BBLS. NOT MORE THAN 200 BBLS ON HAND AT ONE TIME.

STEAM HEAT (NOT FROM BOILERS) IN WARE HOUSES "A" & "B".
NO HEATING IN WARE HO. "C" OR FREE WARE HOUSE.
BUILDINGS KEPT CLEAN & IN GOOD REPAIR.
STANDARD IRON CLAD SHUTTERS ON WARE HOS. AS SHOWN.
NO FINISH ON WALLS OF BRICK WARE HOUSES.

PRIVATE PROPERTY

NO EXPOSURE

Branch

STONE BRIDGE

Scale of Feet.

1894
46
KENTUCKY, 6TH DISTRICT
Licking River
THE LATONIA DISTILLING CO.
Registered Distillery No. 2, 6th Distr. Kenton Co. Ky.
OPERATED by the WHISKEY TRUST.
FREDERICK KINSINGER PROP'R.
Also run as HOFFHEIMER and CO.- COLUMBIA DISTILLING CO.- LOEWE BROS.
LATONIA CLUB DISTILLING CO.- MADDUX, HOBART and CO.-
LATONIA DISTILLING CO.- E. HELLAR and CO.- J. M. DAVIS.-
H. W. SMITH and CO.- WHITE MILLS DISTILLING CO.-
UNION MILLS DISTILLING CO.- STAR DISTIL'G. CO.-
PLEASANT VALLEY DISTILLING CO.
Formerly known as CHAS. L. MILLS DISTILLING CO.- MILLDALE DISTILLING CO.-
WILLOW RUN DISTILLING CO.- NEW CASTLE DISTILLING CO.
Situated in the limits of the borough of MILLDALE.
PRODUCTION RYE & BOURBON WHISKEY, POWER MADE SOUR MASH PROCESS.
MASHING CAPCY. 1200 BUS. & DISTILLING CAPCY. 120 BBLS. PER DAY.
RUN DAILY, 6 MONTHS PER YEAR. 20 HANDS EMPLOYED.
PREVAILING WINDS WESTERLY. ALL BUILDINGS KEPT CLEAN & IN GOOD REPAIR
NO FINISH ON WALLS OF WARE HO'S. & DISTILLERY. NO SMOKING ALLOWED.
ONE NIGHT & SUNDAY WATCHMAN.- POWER STEAM.
FUEL COAL. LIGHTS LARD OIL LANTERNS.
HEAT HOT AIR IN WARE HO'S. AS NOTED. ONE STOVE IN EACH OFFICE.
NO OTHER HEATING.
WATER SUPPLY PUMPED FROM RIVER BY No. 10 CAMERON F. PUMP.
VARIOUS F. PUMPS FOR FIRE PURPOSES AS SHOWN.
HYD'TS., HOSE & V.P'S AS SHOWN.
4 DOZ. CO-OPERATIVE FIRE EXTING'RS. DISTRIBUTED.
FIRE PAILS & BBLS. OF WATER IN EVERY BUILD'G.
NO OTHER FIRE APP'S.
BONDED WARE HOUSES.
No. 2-"A" - CAPCY 2400 BBLS. PAT. RACKS 24 TIERS. HEAT HOT AIR.
" "B" - " 2400 " " " 24 " " " "
" "C" - " 2400 " " " 24 " " " "
" "D" - " 2000 " " " 20 " " " "
" "E" - " 2400 " " " 24 " " " "
" "F" - " 3040 " " " 42 " NO HEATING -
" "G" - " 15750 " " " 105 " HEAT HOT AIR.
" "H" - " 2400 " " " 24 " " " "
" "I" - " 3960 " " " 22 " " " "
" "J.K.L.M." " 4800 " " " 48 " " " "
" "T" - CAPCY. 7644 " " " 42 " " " "
BUILD'GS. BRICK - METAL ROOF LIGHTS LARD OIL LANTERNS.
HEAT HOT AIR, (EXCEPT IN "F") NOT ABOVE 80° FAHR.
DISTILLERY
COAL HEAP
FERMENTING HOUSE
Reservoirs
GRAIN ELEVATOR
BARREL STORAGE
BONDED WARE HO. No. 2-"G"
CAPCY 15,750 BBLS. PAT. RACKS 105 TIERS.
HEAT HOT AIR. TEMPERATURE NOT ABOVE 80° FAHR.
THIS WARE HO. FORMERLY KNOWN AS NO. R.Q.R. & S
ALL PARTITIONS NOW REMOVED.
COOPER SHOP
BONDED WARE HO. No. 2-"F"
CAPCY. 5040 BBLS. PAT. RACKS 42 TIERS.
NO HEATING.
HOG PENS & HAY STORAGE
CATTLE SHED
ON POSTS 10' ABV. GROUND.
12.5' x 42.5'
OLD CATTLE SHED
HEATING BOILERS.
BONDED WARE HOUSES - No. 2
HOT AIR FUNNEL BUILT OF BRICK & TIN
EXTENDS THROUGH CENTER OF WARE HO'S.
WITH OPENINGS AT VARIOUS POINTS.
PRIVATE PROPERTY
PRIVATE PROPERTY
BRICK DWG. BEYOND.
KENTUCKY CENTRAL R.R.
PASSENGER STATION
Scale of Feet.
NO EXPOSURE

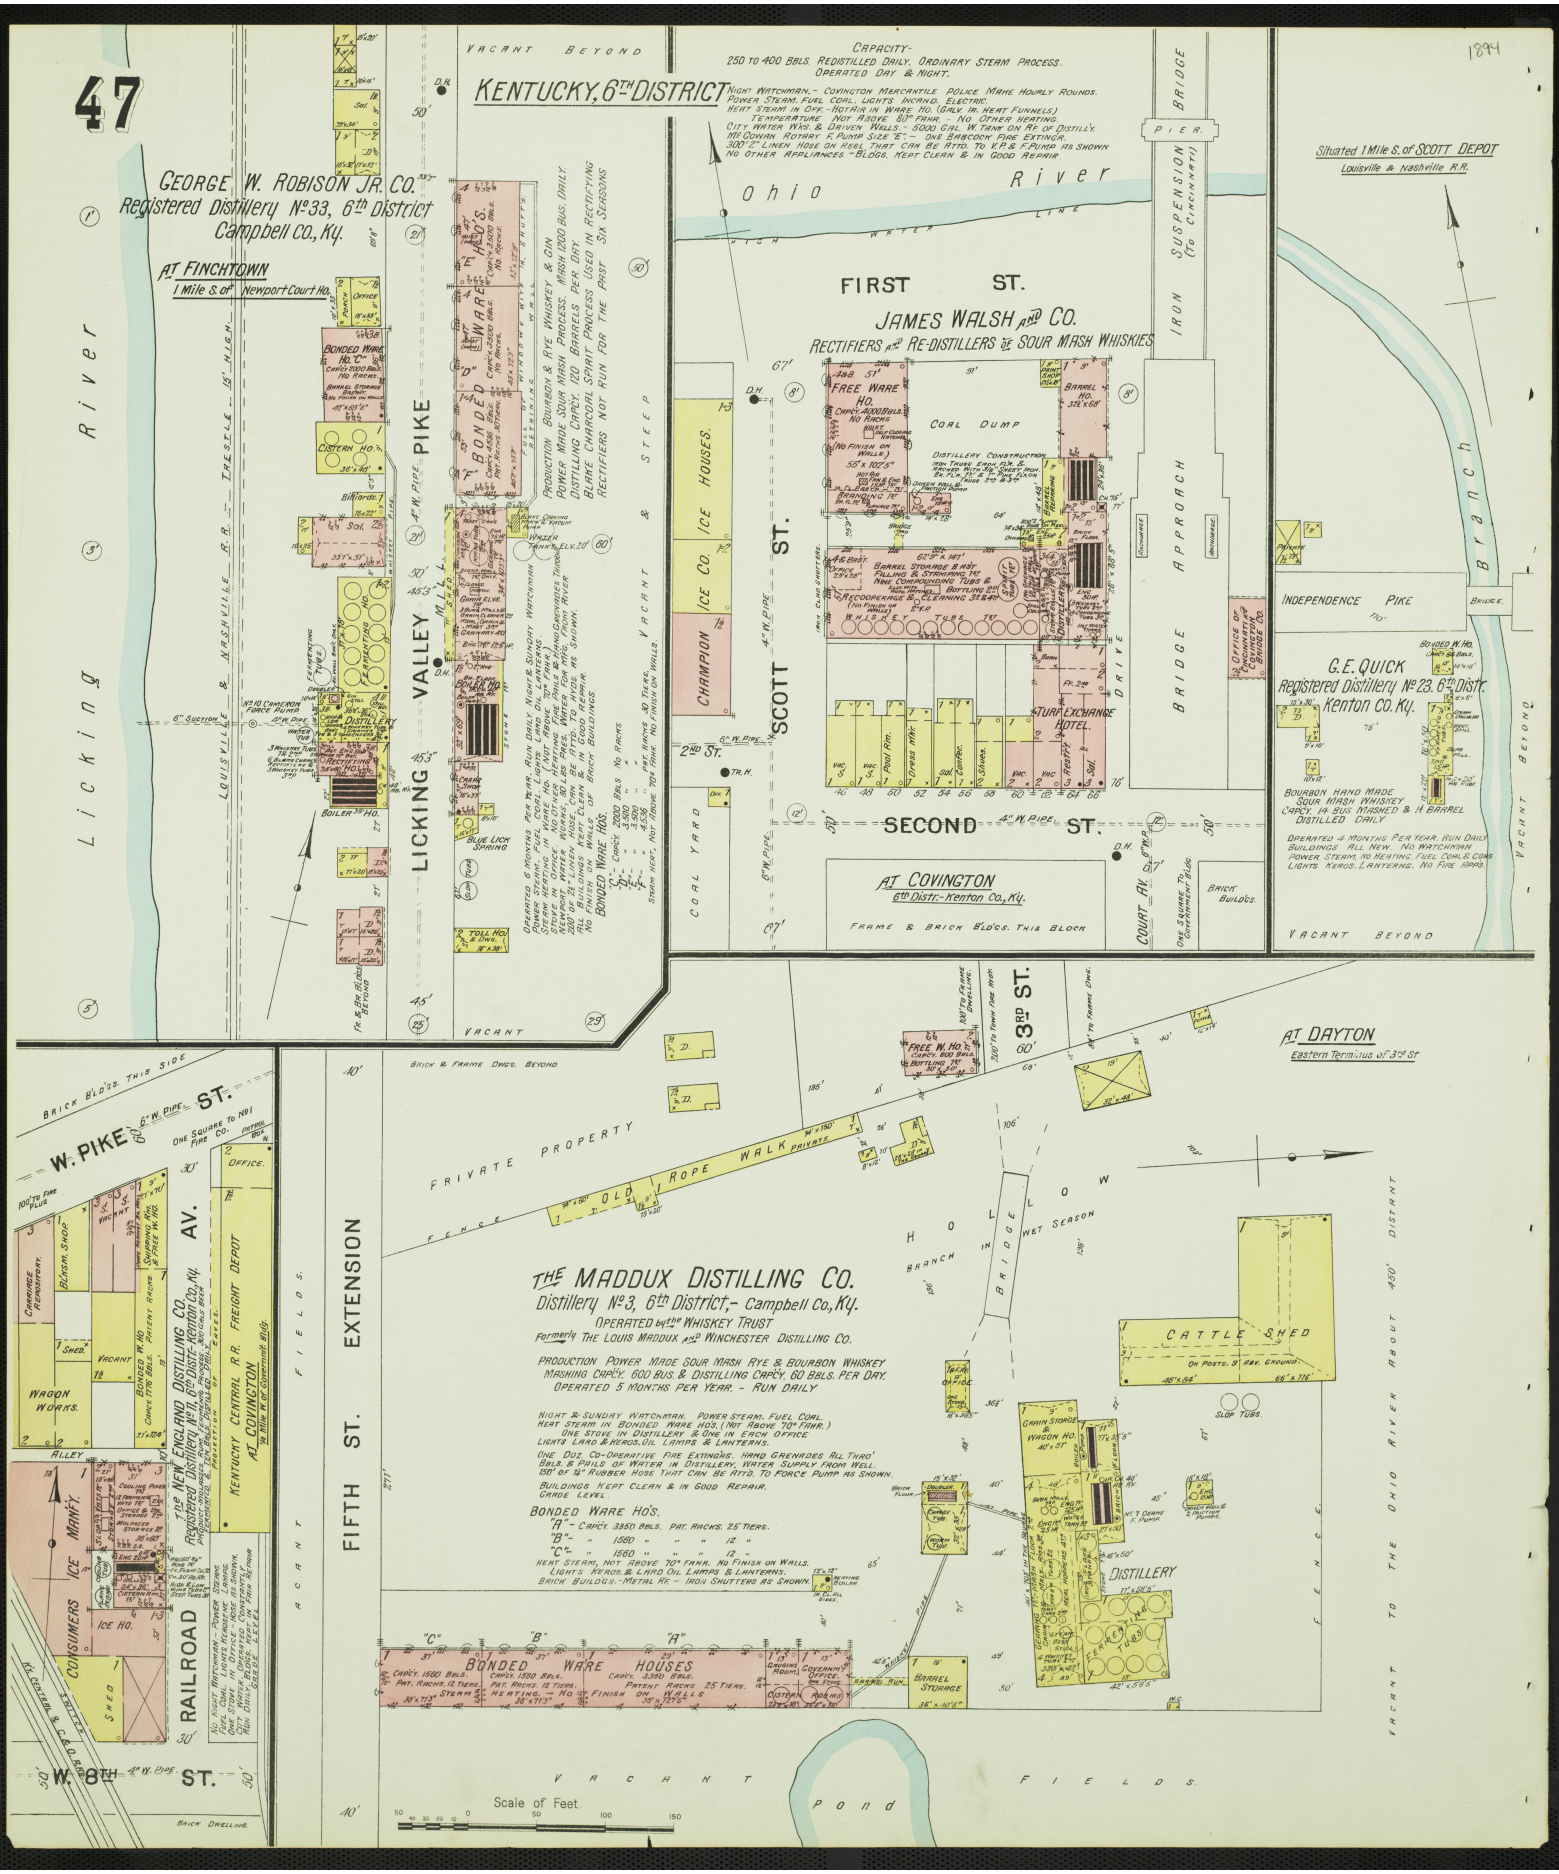
47
KENTUCKY, 6TH DISTRICT
GEORGE W. ROBISON JR. CO.
Registered Distillery No 33, 6th District
Campbell Co., Ky.
AT FINCHTOWN
1 Mile S. of Newport Court Ho.
Ohio River
Licking River
LICKING VALLEY PIKE
LOUISVILLE & NASHVILLE R.R. - TRESTLE - 18' HIGH
FIRST ST.
SECOND ST.
SCOTT ST.
JAMES WALSH AND CO.
RECTIFIERS AND RE-DISTILLERS OF SOUR MASH WHISKIES
CAPACITY-
250 TO 400 BBLS. REDISTILLED DAILY. ORDINARY STEAM PROCESS.
OPERATED DAY & NIGHT.
IRON SUSPENSION BRIDGE (TO CINCINNATI)
BRIDGE APPROACH
INDEPENDENCE PIKE
Situated 1 Mile S. of SCOTT DEPOT
Louisville & Nashville R.R.
G.E. QUICK
Registered Distillery No 23, 6th Distr.
Kenton Co. Ky.
BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY. 14 BUS. MASHED & 14 BARREL DISTILLED DAILY.
AT COVINGTON
6th Distr.- Kenton Co., Ky.
FRAME & BRICK BLDGS. THIS BLOCK
AT DAYTON
Eastern Terminus of 3rd St
3RD ST.
W. PIKE ST.
W. 8TH ST.
FIFTH ST. EXTENSION
RAILROAD
THE MADDUX DISTILLING CO.
Distillery No 3, 6th District,- Campbell Co., Ky.
OPERATED by the WHISKEY TRUST
Formerly THE LOUIS MADDUX AND WINCHESTER DISTILLING CO.
PRODUCTION POWER MADE SOUR MASH RYE & BOURBON WHISKEY
MASHING CAPCY. 600 BUS & DISTILLING CAPCY. 60 BBLS. PER DAY.
OPERATED 5 MONTHS PER YEAR. - RUN DAILY
BONDED WARE HO'S.
"A" - CAPCY. 3350 BBLS. PAT. RACKS. 25 TIERS.
"B" - " 1560 " " " 12 "
"C" - " 1560 " " " 12 "
BONDED WARE HOUSES
DISTILLERY
CATTLE SHED
FERMENTING TUBS
PRIVATE PROPERTY
FENCE
OLD ROPE WALK PRIVATE
HOLLOW
BRANCH
BRIDGE
VACANT FIELDS
POND
Scale of Feet.
0 50 100 150
THE NEW ENGLAND DISTILLING CO.
Registered Distillery No 11, 6th Distr.-Kenton Co., Ky.
KENTUCKY CENTRAL R.R. FREIGHT DEPOT
AT COVINGTON
CONSUMERS ICE MFG'Y.
ICE HO.
WAGON WORKS.
BRICK DWELLING
BRICK BLD'GS. THIS SIDE
ONE SQUARE TO NBI FIRE CO.
PATROL BOX
OFFICE
ALLEY
VACANT
BRICK & FRAME DWGS. BEYOND
VACANT BEYOND
1894

1894

KENTUCKY - 6TH DISTRICT

48

THE BOYERS DISTILLING CO.

Registered Distillery No 16 - 6th Distr. Harrison Co. Ky

PRODUCTION BOURBON WHISKEY - HAND MADE SOUR MASH PROCESS.

MASHING CAPCY 24 BUS - DISTILLING CAPCY 2½ BBLS PER DAY - OPERATED SIX MONTHS IN THE YEAR - RUN DAILY -

BUILDINGS KEPT IN GOOD REPAIR.

NO WATCHMAN - FUEL COAL AND WOOD - WERT STOVE IN OFFICE ONLY - LIGHTS KEROSENE LANTERNS -

WATER SUPPLY FROM WELL AND BRANCH - NO FIRE APPLIANCES.

Grade level - No exposures any side. -

AT CONNERSVILLE

7 Miles S.W. of Cynthiana Court Ho.

Mill Grain 132' Meal 52' Run & Grind 40'x40' Eng. Soap 9'

Well

Feed Grind. Duabler 20'x24' Shell Parch 32'x32' Earth Floor Cut Stalks 18'x60' 1½ 9'

Shed 17'x60'

Distillery

Cistern 8'x12'

Bonded Ware Ho. Cap 700 Bbls 30'x60' 1½ 9'

Corn Crib 30'x32' Off. 1½

Cattle Shed 30'x90' 9'

Stop Tubs

Bridge

Connersville Pike

Branch

THE T. J. MEGIBBEN CO'S "EDGEWATER DISTILLERY"

Registered Distillery No 1 - 6th Distr. Harrison Co. Ky

Formerly known as T. J. MEGIBBEN BROS DISTILLERY

Boiler Ho. 125 HP In the Building 16'x28' Eng. 75 HP Ch. 75

Mill Cleaning 2 Burrs 2 Grain 1 Grain 2 Rolls 1 Grain 3 Rolls 1 Grain 4 Rolls 1 Grain 5 Rolls 1 Grain 6 Rolls 1 Grain 7 Rolls 1 Grain 8 Rolls 1 Grain 9 Rolls 1 Grain 10 Rolls 1 Grain 11 Rolls 1 Grain

1894
NEXT PAGE:
52

THIS PAGE LEFT BLANK FOR SURVEYS OF NEW DISTILLERIES WHICH MAY BE BUILT IN THIS DISTRICT.

1894

52

KENTUCKY - 7TH DISTRICT

AT FRANKFORT
1½ Mile N. of Post Office

E. H. TAYLOR JR. CO. - THE GEO. T. STAGG CO.
"O. F. C." DISTILLERY AND CARLISLE DISTILLERY
— No 113 — — No 2 —

"O. F. C." DISTILLERY

Registered Distillery, No 113 - 7th Distr. Franklin Co. Ky
Product Bourbon & Rye - Hand Made Sour Mash Whiskies
Capcy 500 Bus. Per Day - Run 6 Months in Year.
Brick Bldg - Metal Roof - Fire Under Doubler -

Night Watchman and Clock - Lights Lard Oil Lanterns and Incand. Electric -
Heat Stove in Yeast Rm. - In Office on 2nd Floor, and in Bottling House - Fuel Coal -
Two Large Steam F. Pumps in Distillery, Supplied from River and Reservoir -
500' 1½" Hose on Cart - 200' 1½" Hose in Distillery -

"O. F. C." WARE HOUSES

Bonded Ware Ho.	No 113-A.	- Capcy 3000 Bbls -	No Racks -	Not Heated
Do.	Do.	No 113-B.	" 10.000 "	" "	Steam Heat 70° to 80°
Do.	Do.	No 113-C.	" 18 680 "	" "	" " 70° - 80°
Free	Do.	A.	" 2.000 "	" "	Not Heated -

Bldgs of Brick - Metal Roof and Cornice - All Openings Tinclad -
Constant Watchman and Clock - Night Store Keeper -
Lights Closed Lard Oil Lamps
Ware Houses Used For Storage Only -

CARLISLE DISTILLERY

Registered Distillery No 2 - 7th Distr. Franklin Co Ky
Product Bourbon and Rye - Hand Made Sour Mash Whiskies
Capcy 400 Bus. Per Day - Run 4 Months in the Year.
Brick and Stone Bldg - Metal Roof - Fire Under Doubler -

Constant Watchman and Seth Thomas' Clock - 10 Stations - Heat Stove in Yeast Rm. only.
Lights Lard Oil Lanterns and Incand. Electric - Fuel Coal -
Water Supply From River, And Reservoir Supplied By Spring -
Two Large Steam F. Pumps in Distillery - 500' 1½" Hose on Cart - 200' 1½" Hose in Bldg

CARLISLE WARE HOUSES

Bonded Ware Ho -	No 2-A	- Capcy 8760 Bbls -	Pat. Racks - 12 Tiers -	Steam Heat 70° to 80°
Do.	Do.	No 2-B	" 20000 "	" " 12 "	Do. Do. Do.
Free	Do.	A.	" 1000 "	No Racks	Not Heated.

Brick Bldgs - Metal Roof and Cornice - All Openings Tinclad -
Constant Watchman and Clock - Night Storekeeper - Lights Closed Lard Oil Lamps -
Ware Houses Used For Storage Only -

CATTLE SHED
"O. F. C." BONDED WARE HO. No 113-C.
Cap. 10000 Bbls - No Racks - Steam Heat - Stone 15' 120' x 60' - Used For Storage Only -
"O. F. C." BONDED WARE HO. No 113-B.
Cap. 10000 Bbls - No Racks - 67' x 240' - Steam Heat 70° to 80° - Used For Storage Only
"O. F. C." BONDED WARE HO. No 113-A.
Cap. 3000 Bbls - No Racks - 75' x 150' - Not Heated - Used For Storage Only
"CARLISLE" BONDED WARE HO. No 2-A.
Cap. 8760 Bbls - Pat. Racks - 12 Tiers - Steam Heat 70° to 80° - Used For Storage Only.
"CARLISLE" BONDED WARE HO. No 2-B.
Cap. 20000 Bbls - Pat. Racks - 12 Tiers - Steam Heat - 70° to 80° - Used For Storage Only -
FREE WARE HO A
Cap. 1000 Bbls - No Racks - Not Heated.
"O. F. C." FREE WARE HO. A
Cap. 2000 Bbls - No Racks - No Heated - Storage of Bottled Goods
BOTTLING HO.
CARP'R & REPAIR SHOP.
OFFICE.
SCALES
FEED.
BUGGY HO.
BRANDING SHED
CHARCOAL
CISTERN RM.
WATER TANK
STEAM PIPE
UNDERGD DRAIN PIPE
SURFACE GUTTER
GUTTER
BARREL RUN
SLOP TROUGH
WHISKEY PIPE
DRAIN PIPE
4" W. PIPE FROM PUMP HO. AT RESERVOIR, 7/8 MILE DISTANT.
10" UNDERGD DRAIN
VACANT FIELDS.
FRANKFORT AND LEWIS FERRY TURNPIKE
WELL BADLY SPRUNG.
O. F. C. DISTILLERY
CARLISLE DISTILLERY
GRAIN ELEVATOR Cap. 40000 Bus. 40' x 68'.
9 FERMENTING TUBS 83' - IRON COOLERS - MILL RM. - MASH PUMP - MASH TUB 84' x 52' - 2nd FLOOR - BRICK FLOOR - HEATER - CHIEF - 1st FLOOR - 2nd FLOOR - 3rd FLOOR - 4th FLOOR - 5th FLOOR - 6th FLOOR - 7th FLOOR - 8th FLOOR - 9th FLOOR - 10th FLOOR - 11th FLOOR - 12th FLOOR - 13th FLOOR - 14th FLOOR - 15th FLOOR - 16th FLOOR - 17th FLOOR - 18th FLOOR - 19th FLOOR - 20th FLOOR - 21st FLOOR - 22nd FLOOR - 23rd FLOOR - 24th FLOOR - 25th FLOOR - 26th FLOOR - 27th FLOOR - 28th FLOOR - 29th FLOOR - 30th FLOOR - 31st FLOOR - 32nd FLOOR - 33rd FLOOR - 34th FLOOR - 35th FLOOR - 36th FLOOR - 37th FLOOR - 38th FLOOR - 39th FLOOR - 40th FLOOR - 41st FLOOR - 42nd FLOOR - 43rd FLOOR - 44th FLOOR - 45th FLOOR - 46th FLOOR - 47th FLOOR - 48th FLOOR - 49th FLOOR - 50th FLOOR - 51st FLOOR - 52nd FLOOR - 53rd FLOOR - 54th FLOOR - 55th FLOOR - 56th FLOOR - 57th FLOOR - 58th FLOOR - 59th FLOOR - 60th FLOOR - 61st FLOOR - 62nd FLOOR - 63rd FLOOR - 64th FLOOR - 65th FLOOR - 66th FLOOR - 67th FLOOR - 68th FLOOR - 69th FLOOR - 70th FLOOR - 71st FLOOR - 72nd FLOOR - 73rd FLOOR - 74th FLOOR - 75th FLOOR - 76th FLOOR - 77th FLOOR - 78th FLOOR - 79th FLOOR - 80th FLOOR - 81st FLOOR - 82nd FLOOR - 83rd FLOOR - 84th FLOOR - 85th FLOOR - 86th FLOOR - 87th FLOOR - 88th FLOOR - 89th FLOOR - 90th FLOOR - 91st FLOOR - 92nd FLOOR - 93rd FLOOR - 94th FLOOR - 95th FLOOR - 96th FLOOR - 97th FLOOR - 98th FLOOR - 99th FLOOR - 100th FLOOR - 101st FLOOR - 102nd FLOOR - 103rd FLOOR - 104th FLOOR - 105th FLOOR - 106th FLOOR - 107th FLOOR - 108th FLOOR - 109th FLOOR - 110th FLOOR - 111th FLOOR - 112th FLOOR - 113th FLOOR - 114th FLOOR - 115th FLOOR - 116th FLOOR - 117th FLOOR - 118th FLOOR - 119th FLOOR - 120th FLOOR - 121st FLOOR - 122nd FLOOR - 123rd FLOOR - 124th FLOOR - 125th FLOOR - 126th FLOOR - 127th FLOOR - 128th FLOOR - 129th FLOOR - 130th FLOOR - 131st FLOOR - 132nd FLOOR - 133rd FLOOR - 134th FLOOR - 135th FLOOR - 136th FLOOR - 137th FLOOR - 138th FLOOR - 139th FLOOR - 140th FLOOR - 141st FLOOR - 142nd FLOOR - 143rd FLOOR - 144th FLOOR - 145th FLOOR - 146th FLOOR - 147th FLOOR - 148th FLOOR - 149th FLOOR - 150th FLOOR - 151st FLOOR - 152nd FLOOR - 153rd FLOOR - 154th FLOOR - 155th FLOOR - 156th FLOOR - 157th FLOOR - 158th FLOOR - 159th FLOOR - 160th FLOOR - 161st FLOOR - 162nd FLOOR - 163rd FLOOR - 164th FLOOR - 165th FLOOR - 166th FLOOR - 167th FLOOR - 168th FLOOR - 169th FLOOR - 170th FLOOR - 171st FLOOR - 172nd FLOOR - 173rd FLOOR - 174th FLOOR - 175th FLOOR - 176th FLOOR - 177th FLOOR - 178th FLOOR - 179th FLOOR - 180th FLOOR - 181st FLOOR - 182nd FLOOR - 183rd FLOOR - 184th FLOOR - 185th FLOOR - 186th FLOOR - 187th FLOOR - 188th FLOOR - 189th FLOOR - 190th FLOOR - 191st FLOOR - 192nd FLOOR - 193rd FLOOR - 194th FLOOR - 195th FLOOR - 196th FLOOR - 197th FLOOR - 198th FLOOR - 199th FLOOR - 200th FLOOR - 201st FLOOR - 202nd FLOOR - 203rd FLOOR - 204th FLOOR - 205th FLOOR - 206th FLOOR - 207th FLOOR - 208th FLOOR - 209th FLOOR - 210th FLOOR - 211th FLOOR - 212th FLOOR - 213th FLOOR - 214th FLOOR - 215th FLOOR - 216th FLOOR - 217th FLOOR - 218th FLOOR - 219th FLOOR - 220th FLOOR - 221st FLOOR - 222nd FLOOR - 223rd FLOOR - 224th FLOOR - 225th FLOOR - 226th FLOOR - 227th FLOOR - 228th FLOOR - 229th FLOOR - 230th FLOOR - 231st FLOOR - 232nd FLOOR - 233rd FLOOR - 234th FLOOR - 235th FLOOR - 236th FLOOR - 237th FLOOR - 238th FLOOR - 239th FLOOR - 240th FLOOR - 241st FLOOR - 242nd FLOOR - 243rd FLOOR - 244th FLOOR - 245th FLOOR - 246th FLOOR - 247th FLOOR - 248th FLOOR - 249th FLOOR - 250th FLOOR - 251st FLOOR - 252nd FLOOR - 253rd FLOOR - 254th FLOOR - 255th FLOOR - 256th FLOOR - 257th FLOOR - 258th FLOOR - 259th FLOOR - 260th FLOOR - 261st FLOOR - 262nd FLOOR - 263rd FLOOR - 264th FLOOR - 265th FLOOR - 266th FLOOR - 267th FLOOR - 268th FLOOR - 269th FLOOR - 270th FLOOR - 271st FLOOR - 272nd FLOOR - 273rd FLOOR - 274th FLOOR - 275th FLOOR - 276th FLOOR - 277th FLOOR - 278th FLOOR - 279th FLOOR - 280th FLOOR - 281st FLOOR - 282nd FLOOR - 283rd FLOOR - 284th FLOOR - 285th FLOOR - 286th FLOOR - 287th FLOOR - 288th FLOOR - 289th FLOOR - 290th FLOOR - 291st FLOOR - 292nd FLOOR - 293rd FLOOR - 294th FLOOR - 295th FLOOR - 296th FLOOR - 297th FLOOR - 298th FLOOR - 299th FLOOR - 300th FLOOR - 301st FLOOR - 302nd FLOOR - 303rd FLOOR - 304th FLOOR - 305th FLOOR - 306th FLOOR - 307th FLOOR - 308th FLOOR - 309th FLOOR - 310th FLOOR - 311th FLOOR - 312th FLOOR - 313th FLOOR - 314th FLOOR - 315th FLOOR - 316th FLOOR - 317th FLOOR - 318th FLOOR - 319th FLOOR - 320th FLOOR - 321st FLOOR - 322nd FLOOR - 323rd FLOOR - 324th FLOOR - 325th FLOOR - 326th FLOOR - 327th FLOOR - 328th FLOOR - 329th FLOOR - 330th FLOOR - 331st FLOOR - 332nd FLOOR - 333rd FLOOR - 334th FLOOR - 335th FLOOR - 336th FLOOR - 337th FLOOR - 338th FLOOR - 339th FLOOR - 340th FLOOR - 341st FLOOR - 342nd FLOOR - 343rd FLOOR - 344th FLOOR - 345th FLOOR - 346th FLOOR - 347th FLOOR - 348th FLOOR - 349th FLOOR - 350th FLOOR - 351st FLOOR - 352nd FLOOR - 353rd FLOOR - 354th FLOOR - 355th FLOOR - 356th FLOOR - 357th FLOOR - 358th FLOOR - 359th FLOOR - 360th FLOOR - 361st FLOOR - 362nd FLOOR - 363rd FLOOR - 364th FLOOR - 365th FLOOR - 366th FLOOR - 367th FLOOR - 368th FLOOR - 369th FLOOR - 370th FLOOR - 371st FLOOR - 372nd FLOOR - 373rd FLOOR - 374th FLOOR - 375th FLOOR - 376th FLOOR - 377th FLOOR - 378th FLOOR - 379th FLOOR - 380th FLOOR - 381st FLOOR - 382nd FLOOR - 383rd FLOOR - 384th FLOOR - 385th FLOOR - 386th FLOOR - 387th FLOOR - 388th FLOOR - 389th FLOOR - 390th FLOOR - 391st FLOOR - 392nd FLOOR - 393rd FLOOR - 394th FLOOR - 395th FLOOR - 396th FLOOR - 397th FLOOR - 398th FLOOR - 399th FLOOR - 400th FLOOR - 401st FLOOR - 402nd FLOOR - 403rd FLOOR - 404th FLOOR - 405th FLOOR - 406th FLOOR - 407th FLOOR - 408th FLOOR - 409th FLOOR - 410th FLOOR - 411th FLOOR - 412th FLOOR - 413th FLOOR - 414th FLOOR - 415th FLOOR - 416th FLOOR - 417th FLOOR - 418th FLOOR - 419th FLOOR - 420th FLOOR - 421st FLOOR - 422nd FLOOR - 423rd FLOOR - 424th FLOOR - 425th FLOOR - 426th FLOOR - 427th FLOOR - 428th FLOOR - 429th FLOOR - 430th FLOOR - 431st FLOOR - 432nd FLOOR - 433rd FLOOR - 434th FLOOR - 435th FLOOR - 436th FLOOR - 437th FLOOR - 438th FLOOR - 439th FLOOR - 440th FLOOR - 441st FLOOR - 442nd FLOOR - 443rd FLOOR - 444th FLOOR - 445th FLOOR - 446th FLOOR - 447th FLOOR - 448th FLOOR - 449th FLOOR - 450th FLOOR - 451st FLOOR - 452nd FLOOR - 453rd FLOOR - 454th FLOOR - 455th FLOOR - 456th FLOOR - 457th FLOOR - 458th FLOOR - 459th FLOOR - 460th FLOOR - 461st FLOOR - 462nd FLOOR - 463rd FLOOR - 464th FLOOR - 465th FLOOR - 466th FLOOR - 467th FLOOR - 468th FLOOR - 469th FLOOR - 470th FLOOR - 471st FLOOR - 472nd FLOOR - 473rd FLOOR - 474th FLOOR - 475th FLOOR - 476th FLOOR - 477th FLOOR - 478th FLOOR - 479th FLOOR - 480th FLOOR - 481st FLOOR - 482nd FLOOR - 483rd FLOOR - 484th FLOOR - 485th FLOOR - 486th FLOOR - 487th FLOOR - 488th FLOOR - 489th FLOOR - 490th FLOOR - 491st FLOOR - 492nd FLOOR - 493rd FLOOR - 494th FLOOR - 495th FLOOR - 496th FLOOR - 497th FLOOR - 498th FLOOR - 499th FLOOR - 500th FLOOR - 501st FLOOR - 502nd FLOOR - 503rd FLOOR - 504th FLOOR - 505th FLOOR - 506th FLOOR - 507th FLOOR - 508th FLOOR - 509th FLOOR - 510th FLOOR - 511th FLOOR - 512th FLOOR - 513th FLOOR - 514th FLOOR - 515th FLOOR - 516th FLOOR - 517th FLOOR - 518th FLOOR - 519th FLOOR - 520th FLOOR - 521st FLOOR - 522nd FLOOR - 523rd FLOOR - 524th FLOOR - 525th FLOOR - 526th FLOOR - 527th FLOOR - 528th FLOOR - 529th FLOOR - 530th FLOOR - 531st FLOOR - 532nd FLOOR - 533rd FLOOR - 534th FLOOR - 535th FLOOR - 536th FLOOR - 537th FLOOR - 538th FLOOR - 539th FLOOR - 540th FLOOR - 541st FLOOR - 542nd FLOOR - 543rd FLOOR - 544th FLOOR - 545th FLOOR - 546th FLOOR - 547th FLOOR - 548th FLOOR - 549th FLOOR - 550th FLOOR - 551st FLOOR - 552nd FLOOR - 553rd FLOOR - 554th FLOOR - 555th FLOOR - 556th FLOOR - 557th FLOOR - 558th FLOOR - 559th FLOOR - 560th FLOOR - 561st FLOOR - 562nd FLOOR - 563rd FLOOR - 564th FLOOR - 565th FLOOR - 566th FLOOR - 567th FLOOR - 568th FLOOR - 569th FLOOR - 570th FLOOR - 571st FLOOR - 572nd FLOOR - 573rd FLOOR - 574th FLOOR - 575th FLOOR - 576th FLOOR - 577th FLOOR - 578th FLOOR - 579th FLOOR - 580th FLOOR - 581st FLOOR - 582nd FLOOR - 583rd FLOOR - 584th FLOOR - 585th FLOOR - 586th FLOOR - 587th FLOOR - 588th FLOOR - 589th FLOOR - 590th FLOOR - 591st FLOOR - 592nd FLOOR - 593rd FLOOR - 594th FLOOR - 595th FLOOR - 596th FLOOR - 597th FLOOR - 598th FLOOR - 599th FLOOR - 600th FLOOR - 601st FLOOR - 602nd FLOOR - 603rd FLOOR - 604th FLOOR - 605th FLOOR - 606th FLOOR - 607th FLOOR - 608th FLOOR - 609th FLOOR - 610th FLOOR - 611th FLOOR - 612th FLOOR - 613th FLOOR - 614th FLOOR - 615th FLOOR - 616th FLOOR - 617th FLOOR - 618th FLOOR - 619th FLOOR - 620th FLOOR - 621st FLOOR - 622nd FLOOR - 623rd FLOOR - 624th FLOOR - 625th FLOOR - 626th FLOOR - 627th FLOOR - 628th FLOOR - 629th FLOOR - 630th FLOOR - 631st FLOOR - 632nd FLOOR - 633rd FLOOR - 634th FLOOR - 635th FLOOR - 636th FLOOR - 637th FLOOR - 638th FLOOR - 639th FLOOR - 640th FLOOR - 641st FLOOR - 642nd FLOOR - 643rd FLOOR - 644th FLOOR - 645th FLOOR - 646th FLOOR - 647th FLOOR - 648th FLOOR - 649th FLOOR - 650th FLOOR - 651st FLOOR - 652nd FLOOR - 653rd FLOOR - 654th FLOOR - 655th FLOOR - 656th FLOOR - 657th FLOOR - 658th FLOOR - 659th FLOOR - 660th FLOOR - 661st FLOOR - 662nd FLOOR - 663rd FLOOR - 664th FLOOR - 665th FLOOR - 666th FLOOR - 667th FLOOR - 668th FLOOR - 669th FLOOR - 670th FLOOR - 671st FLOOR - 672nd FLOOR - 673rd FLOOR - 674th FLOOR - 675th FLOOR - 676th FLOOR - 677th FLOOR - 678th FLOOR - 679th FLOOR - 680th FLOOR - 681st FLOOR - 682nd FLOOR - 683rd FLOOR - 684th FLOOR - 685th FLOOR - 686th FLOOR - 687th FLOOR - 688th FLOOR - 689th FLOOR - 690th FLOOR - 691st FLOOR - 692nd FLOOR - 693rd FLOOR - 694th FLOOR - 695th FLOOR - 696th FLOOR - 697th FLOOR - 698th FLOOR - 699th FLOOR - 700th FLOOR - 701st FLOOR - 702nd FLOOR - 703rd FLOOR - 704th FLOOR - 705th FLOOR - 706th FLOOR - 707th FLOOR - 708th FLOOR - 709th FLOOR - 710th FLOOR - 711th FLOOR - 712th FLOOR - 713th FLOOR - 714th FLOOR - 715th FLOOR - 716th FLOOR - 717th FLOOR - 718th FLOOR - 719th FLOOR - 720th FLOOR - 721st FLOOR - 722nd FLOOR - 723rd FLOOR - 724th FLOOR - 725th FLOOR - 726th FLOOR - 727th FLOOR - 728th FLOOR - 729th FLOOR - 730th FLOOR - 731st FLOOR - 732nd FLOOR - 733rd FLOOR - 734th FLOOR - 735th FLOOR - 736th FLOOR - 737th FLOOR - 738th FLOOR - 739th FLOOR - 740th FLOOR - 741st FLOOR - 742nd FLOOR - 743rd FLOOR - 744th FLOOR - 745th FLOOR - 746th FLOOR - 747th FLOOR - 748th FLOOR - 749th FLOOR - 750th FLOOR - 751st FLOOR - 752nd FLOOR - 753rd FLOOR - 754th FLOOR - 755th FLOOR - 756th FLOOR - 757th FLOOR - 758th FLOOR - 759th FLOOR - 760th FLOOR - 761st FLOOR - 762nd FLOOR - 763rd FLOOR - 764th FLOOR - 765th FLOOR - 766th FLOOR - 767th FLOOR - 768th FLOOR - 769th FLOOR - 770th FLOOR - 771st FLOOR - 772nd FLOOR - 773rd FLOOR - 774th FLOOR - 775th FLOOR - 776th FLOOR - 777th FLOOR - 778th FLOOR - 779th FLOOR - 780th FLOOR - 781st FLOOR - 782nd FLOOR - 783rd FLOOR - 784th FLOOR - 785th FLOOR - 786th FLOOR - 787th FLOOR - 788th FLOOR - 789th FLOOR - 790th FLOOR - 791st FLOOR - 792nd FLOOR - 793rd FLOOR - 794th FLOOR - 795th FLOOR - 796th FLOOR - 797th FLOOR - 798th FLOOR - 799th FLOOR - 800th FLOOR - 801st FLOOR - 802nd FLOOR - 803rd FLOOR - 804th FLOOR - 805th FLOOR - 806th FLOOR - 807th FLOOR - 808th FLOOR - 809th FLOOR - 810th FLOOR - 811th FLOOR - 812th FLOOR - 813th FLOOR - 814th FLOOR - 815th FLOOR - 816th FLOOR - 817th FLOOR - 818th FLOOR - 819th FLOOR - 820th FLOOR - 821st FLOOR - 822nd FLOOR - 823rd FLOOR - 824th FLOOR - 825th FLOOR - 826th FLOOR - 827th FLOOR - 828th FLOOR - 829th FLOOR - 830th FLOOR - 831st FLOOR - 832nd FLOOR - 833rd FLOOR - 834th FLOOR - 835th FLOOR - 836th FLOOR - 837th FLOOR - 838th FLOOR - 839th FLOOR - 840th FLOOR - 841st FLOOR - 842nd FLOOR - 843rd FLOOR - 844th FLOOR - 845th FLOOR - 846th FLOOR - 847th FLOOR - 848th FLOOR - 849th FLOOR - 850th FLOOR - 851st FLOOR - 852nd FLOOR - 853rd FLOOR - 854th FLOOR - 855th FLOOR - 856th FLOOR - 857th FLOOR - 858th FLOOR - 859th FLOOR - 860th FLOOR - 861st FLOOR - 862nd FLOOR - 863rd FLOOR - 864th FLOOR - 865th FLOOR - 866th FLOOR - 867th FLOOR - 868th FLOOR - 869th FLOOR - 870th FLOOR - 871st FLOOR - 872nd FLOOR - 873rd FLOOR - 874th FLOOR - 875th FLOOR - 876th FLOOR - 877th FLOOR - 878th FLOOR - 879th FLOOR - 880th FLOOR - 881st FLOOR - 882nd FLOOR - 883rd FLOOR - 884th FLOOR - 885th FLOOR - 886th FLOOR - 887th FLOOR - 888th FLOOR - 889th FLOOR - 890th FLOOR - 891st FLOOR - 892nd FLOOR - 893rd FLOOR - 894th FLOOR - 895th FLOOR - 896th FLOOR - 897th FLOOR - 898th FLOOR - 899th FLOOR - 900th FLOOR - 901st FLOOR - 902nd FLOOR - 903rd FLOOR - 904th FLOOR - 905th FLOOR - 906th FLOOR - 907th FLOOR - 908th FLOOR - 909th FLOOR - 910th FLOOR - 911th FLOOR - 912th FLOOR - 913th FLOOR - 914th FLOOR - 915th FLOOR - 916th FLOOR - 917th FLOOR - 918th FLOOR - 919th FLOOR - 920th FLOOR - 921st FLOOR - 922nd FLOOR - 923rd FLOOR - 924th FLOOR - 925th FLOOR - 926th FLOOR - 927th FLOOR - 928th FLOOR - 929th FLOOR - 930th FLOOR - 931st FLOOR - 932nd FLOOR - 933rd FLOOR - 934th FLOOR - 935th FLOOR - 936th FLOOR - 937th FLOOR - 938th FLOOR - 939th FLOOR - 940th FLOOR - 941st FLOOR - 942nd FLOOR - 943rd FLOOR - 944th FLOOR - 945th FLOOR - 946th FLOOR - 947th FLOOR - 948th FLOOR - 949th FLOOR - 950th FLOOR - 951st FLOOR - 952nd FLOOR - 953rd FLOOR - 954th FLOOR - 955th FLOOR - 956th FLOOR - 957th FLOOR - 958th FLOOR - 959th FLOOR - 960th FLOOR - 961st FLOOR - 962nd FLOOR - 963rd FLOOR - 964th FLOOR - 965th FLOOR - 966th FLOOR - 967th FLOOR - 968th FLOOR - 969th FLOOR - 970th FLOOR - 971st FLOOR - 972nd FLOOR - 973rd FLOOR - 974th FLOOR - 975th FLOOR - 976th FLOOR - 977th FLOOR - 978th FLOOR - 979th FLOOR - 980th FLOOR - 981st FLOOR - 982nd FLOOR - 983rd FLOOR - 984th FLOOR - 985th FLOOR - 986th FLOOR - 987th FLOOR - 988th FLOOR - 989th FLOOR - 990th FLOOR - 991st FLOOR - 992nd FLOOR - 993rd FLOOR - 994th FLOOR - 995th FLOOR - 996th FLOOR - 997th FLOOR - 998th FLOOR - 999th FLOOR - 1000th FLOOR
MASH.
21 IRON PILLARS BST & 1ST CEMENT FLOOR BST
FERMENTING VATS, COPPER LINED BST
IRON COOLERS
STONE RETAINING WALL
WINDOWS
STONE
1ST FLOOR
2ND FLOOR
3RD FLOOR
4TH FLOOR
5TH FLOOR
6TH FLOOR
7TH FLOOR
8TH FLOOR
9TH FLOOR
10TH FLOOR
11TH FLOOR
12TH FLOOR
13TH FLOOR
14TH FLOOR
15TH FLOOR
16TH FLOOR
17TH FLOOR
18TH FLOOR
19TH FLOOR
20TH FLOOR
21ST FLOOR
22ND FLOOR
23RD FLOOR
24TH FLOOR
25TH FLOOR
26TH FLOOR
27TH FLOOR
28TH FLOOR
29TH FLOOR
30TH FLOOR
31ST FLOOR
32ND FLOOR
33RD FLOOR
34TH FLOOR
35TH FLOOR
36TH FLOOR
37TH FLOOR
38TH FLOOR
39TH FLOOR
40TH FLOOR
41ST FLOOR
42ND FLOOR
43RD FLOOR
44TH FLOOR
45TH FLOOR
46TH FLOOR
47TH FLOOR
48TH FLOOR
49TH FLOOR
50TH FLOOR
51ST FLOOR
52ND FLOOR
53RD FLOOR
54TH FLOOR
55TH FLOOR
56TH FLOOR
57TH FLOOR
58TH FLOOR
59TH FLOOR
60TH FLOOR
61ST FLOOR
62ND FLOOR
63RD FLOOR
64TH FLOOR
65TH FLOOR
66TH FLOOR
67TH FLOOR
68TH FLOOR
69TH FLOOR
70TH FLOOR
71ST FLOOR
72ND FLOOR
73RD FLOOR
74TH FLOOR
75TH FLOOR
76TH FLOOR
77TH FLOOR
78TH FLOOR
79TH FLOOR
80TH FLOOR
81ST FLOOR
82ND FLOOR
83RD FLOOR
84TH FLOOR
85TH FLOOR
86TH FLOOR
87TH FLOOR
88TH FLOOR
89TH FLOOR
90TH FLOOR
91ST FLOOR
92ND FLOOR
93RD FLOOR
94TH FLOOR
95TH FLOOR
96TH FLOOR
97TH FLOOR
98TH FLOOR
99TH FLOOR
100TH FLOOR
101ST FLOOR
102ND FLOOR
103RD FLOOR
104TH FLOOR
105TH FLOOR
106TH FLOOR
107TH FLOOR
108TH FLOOR
109TH FLOOR
110TH FLOOR
111TH FLOOR
112TH FLOOR
113TH FLOOR
114TH FLOOR
115TH FLOOR
116TH FLOOR
117TH FLOOR
118TH FLOOR
119TH FLOOR
120TH FLOOR
121ST FLOOR
122ND FLOOR
123RD FLOOR
124TH FLOOR
125TH FLOOR
126TH FLOOR
127TH FLOOR
128TH FLOOR
129TH FLOOR
130TH FLOOR
131ST FLOOR
132ND FLOOR
133RD FLOOR
134TH FLOOR
135TH FLOOR
136TH FLOOR
137TH FLOOR
138TH FLOOR
139TH FLOOR
140TH FLOOR
141ST FLOOR
142ND FLOOR
143RD FLOOR
144TH FLOOR
145TH FLOOR
146TH FLOOR
147TH FLOOR
148TH FLOOR
149TH FLOOR
150TH FLOOR
151ST FLOOR
152ND FLOOR
153RD FLOOR
154TH FLOOR
155TH FLOOR
156TH FLOOR
157TH FLOOR
158TH FLOOR
159TH FLOOR
160TH FLOOR
161ST FLOOR
162ND FLOOR
163RD FLOOR
164TH FLOOR
165TH FLOOR
166TH FLOOR
167TH FLOOR
168TH FLOOR
169TH FLOOR
170TH FLOOR
171ST FLOOR
172ND FLOOR
173RD FLOOR
174TH FLOOR
175TH FLOOR
176TH FLOOR
177TH FLOOR
178TH FLOOR
179TH FLOOR
180TH FLOOR
181ST FLOOR
182ND FLOOR
183RD FLOOR
184TH FLOOR
185TH FLOOR
186TH FLOOR
187TH FLOOR
188TH FLOOR
189TH FLOOR
190TH FLOOR
191ST FLOOR
192ND FLOOR
193RD FLOOR
194TH FLOOR
195TH FLOOR
196TH FLOOR
197TH FLOOR
198TH FLOOR
199TH FLOOR
200TH FLOOR
201ST FLOOR
202ND FLOOR
203RD FLOOR
204TH FLOOR
205TH FLOOR
206TH FLOOR
207TH FLOOR
208TH FLOOR
209TH FLOOR
210TH FLOOR
211TH FLOOR
212TH FLOOR
213TH FLOOR
214TH FLOOR
215TH FLOOR
216TH FLOOR
217TH FLOOR
218TH FLOOR
219TH FLOOR
220TH FLOOR
221ST FLOOR
222ND FLOOR
223RD FLOOR
224TH FLOOR
225TH FLOOR
226TH FLOOR
227TH FLOOR
228TH FLOOR
229TH FLOOR
230TH FLOOR
231ST FLOOR
232ND FLOOR
233RD FLOOR
234TH FLOOR
235TH FLOOR
236TH FLOOR
237TH FLOOR
238TH FLOOR
239TH FLOOR
240TH FLOOR
241ST FLOOR
242ND FLOOR
243RD FLOOR
244TH FLOOR
245TH FLOOR
246TH FLOOR
247TH FLOOR
248TH FLOOR
249TH FLOOR
250TH FLOOR
251ST FLOOR
252ND FLOOR
253RD FLOOR
254TH FLOOR
255TH FLOOR
256TH FLOOR
257TH FLOOR
258TH FLOOR
259TH FLOOR
260TH FLOOR
261ST FLOOR
262ND FLOOR
263RD FLOOR
264TH FLOOR
265TH FLOOR
266TH FLOOR
267TH FLOOR
268TH FLOOR
269TH FLOOR
270TH FLOOR
271ST FLOOR
272ND FLOOR
273RD FLOOR
274TH FLOOR
275TH FLOOR
276TH FLOOR
277TH FLOOR
278TH FLOOR
279TH FLOOR
280TH FLOOR
281ST FLOOR
282ND FLOOR
283RD FLOOR
284TH FLOOR
285TH FLOOR
286TH FLOOR
287TH FLOOR
288TH FLOOR
289TH FLOOR
290TH FLOOR
291ST FLOOR
292ND FLOOR
293RD FLOOR
294TH FLOOR
295TH FLOOR
296TH FLOOR
297TH FLOOR
298TH FLOOR
299TH FLOOR
300TH FLOOR
301ST FLOOR
302ND FLOOR
303RD FLOOR
304TH FLOOR
305TH FLOOR
306TH FLOOR
307TH FLOOR
308TH FLOOR
309TH FLOOR
310TH FLOOR
311TH FLOOR
312TH FLOOR
313TH FLOOR
314TH FLOOR
315TH FLOOR
316TH FLOOR
317TH FLOOR
318TH FLOOR
319TH FLOOR
320TH FLOOR
321ST FLOOR
322ND FLOOR
323RD FLOOR
324TH FLOOR
325TH FLOOR
326TH FLOOR
327TH FLOOR
328TH FLOOR
329TH FLOOR
330TH FLOOR
331ST FLOOR
332ND FLOOR
333RD FLOOR
334TH FLOOR
335TH FLOOR
336TH FLOOR
337TH FLOOR
338TH FLOOR
339TH FLOOR
340TH FLOOR
341ST FLOOR
342ND FLOOR
343RD FLOOR
344TH FLOOR
345TH FLOOR
346TH FLOOR
347TH FLOOR
348TH FLOOR
349TH FLOOR
350TH FLOOR
351ST FLOOR
352ND FLOOR
353RD FLOOR
354TH FLOOR
355TH FLOOR
356TH FLOOR
357TH FLOOR
358TH FLOOR
359TH FLOOR
360TH FLOOR
361ST FLOOR
362ND FLOOR
363RD FLOOR
364TH FLOOR
365TH FLOOR
366TH FLOOR
367TH FLOOR
368TH FLOOR
369TH FLOOR
370TH FLOOR
371ST FLOOR
372ND FLOOR
373RD FLOOR
374TH FLOOR
375TH FLOOR
376TH FLOOR
377TH FLOOR
378TH FLOOR
379TH FLOOR
380TH FLOOR
381ST FLOOR
382ND FLOOR
383RD FLOOR
384TH FLOOR
385TH FLOOR
386TH FLOOR
387TH FLOOR
388TH FLOOR
389TH FLOOR
390TH FLOOR
391ST FLOOR
392ND FLOOR
393RD FLOOR
394TH FLOOR
395TH FLOOR
396TH FLOOR
397TH FLOOR
398TH FLOOR
399TH FLOOR
400TH FLOOR
401ST FLOOR
402ND FLOOR
403RD FLOOR
404TH FLOOR
405TH FLOOR
406TH FLOOR
407TH FLOOR
408TH FLOOR
409TH FLOOR
410TH FLOOR
411TH FLOOR
412TH FLOOR
413TH FLOOR
414TH FLOOR
415TH FLOOR
416TH FLOOR
417TH FLOOR
418TH FLOOR
419TH FLOOR
420TH FLOOR
421ST FLOOR
422ND FLOOR
423RD FLOOR
424TH FLOOR
425TH FLOOR
426TH FLOOR
427TH FLOOR
428TH FLOOR
429TH FLOOR
430TH FLOOR
431ST FLOOR
432ND FLOOR
433RD FLOOR
434TH FLOOR
435TH FLOOR
436TH FLOOR
437TH FLOOR
438TH FLOOR
439TH FLOOR
440TH FLOOR
441ST FLOOR
442ND FLOOR
443RD FLOOR
444TH FLOOR
445TH FLOOR
446TH FLOOR
447TH FLOOR
448TH FLOOR
449TH FLOOR
450TH FLOOR
451ST FLOOR
452ND FLOOR
453RD FLOOR
454TH FLOOR
455TH FLOOR
456TH FLOOR
457TH FLOOR
458TH FLOOR
459TH FLOOR
460TH FLOOR
461ST FLOOR
462ND FLOOR
463RD FLOOR
464TH FLOOR
465TH FLOOR
466TH FLOOR
467TH FLOOR
468TH FLOOR
469TH FLOOR
470TH FLOOR
471ST FLOOR
472ND FLOOR
473RD FLOOR
474TH FLOOR
475TH FLOOR
476TH FLOOR
477TH FLOOR
478TH FLOOR
479TH FLOOR
480TH FLOOR
481ST FLOOR
482ND FLOOR
483RD FLOOR
484TH FLOOR
485TH FLOOR
486TH FLOOR
487TH FLOOR
488TH FLOOR
489TH FLOOR
490TH FLOOR
491ST FLOOR
492ND FLOOR
493RD FLOOR
494TH FLOOR
495TH FLOOR
496TH FLOOR
497TH FLOOR
498TH FLOOR
499TH FLOOR
500TH FLOOR
501ST FLOOR
502ND FLOOR
503RD FLOOR
504TH FLOOR
505TH FLOOR
506TH FLOOR
507TH FLOOR
508TH FLOOR
509TH FLOOR
510TH FLOOR
511TH FLOOR
512TH

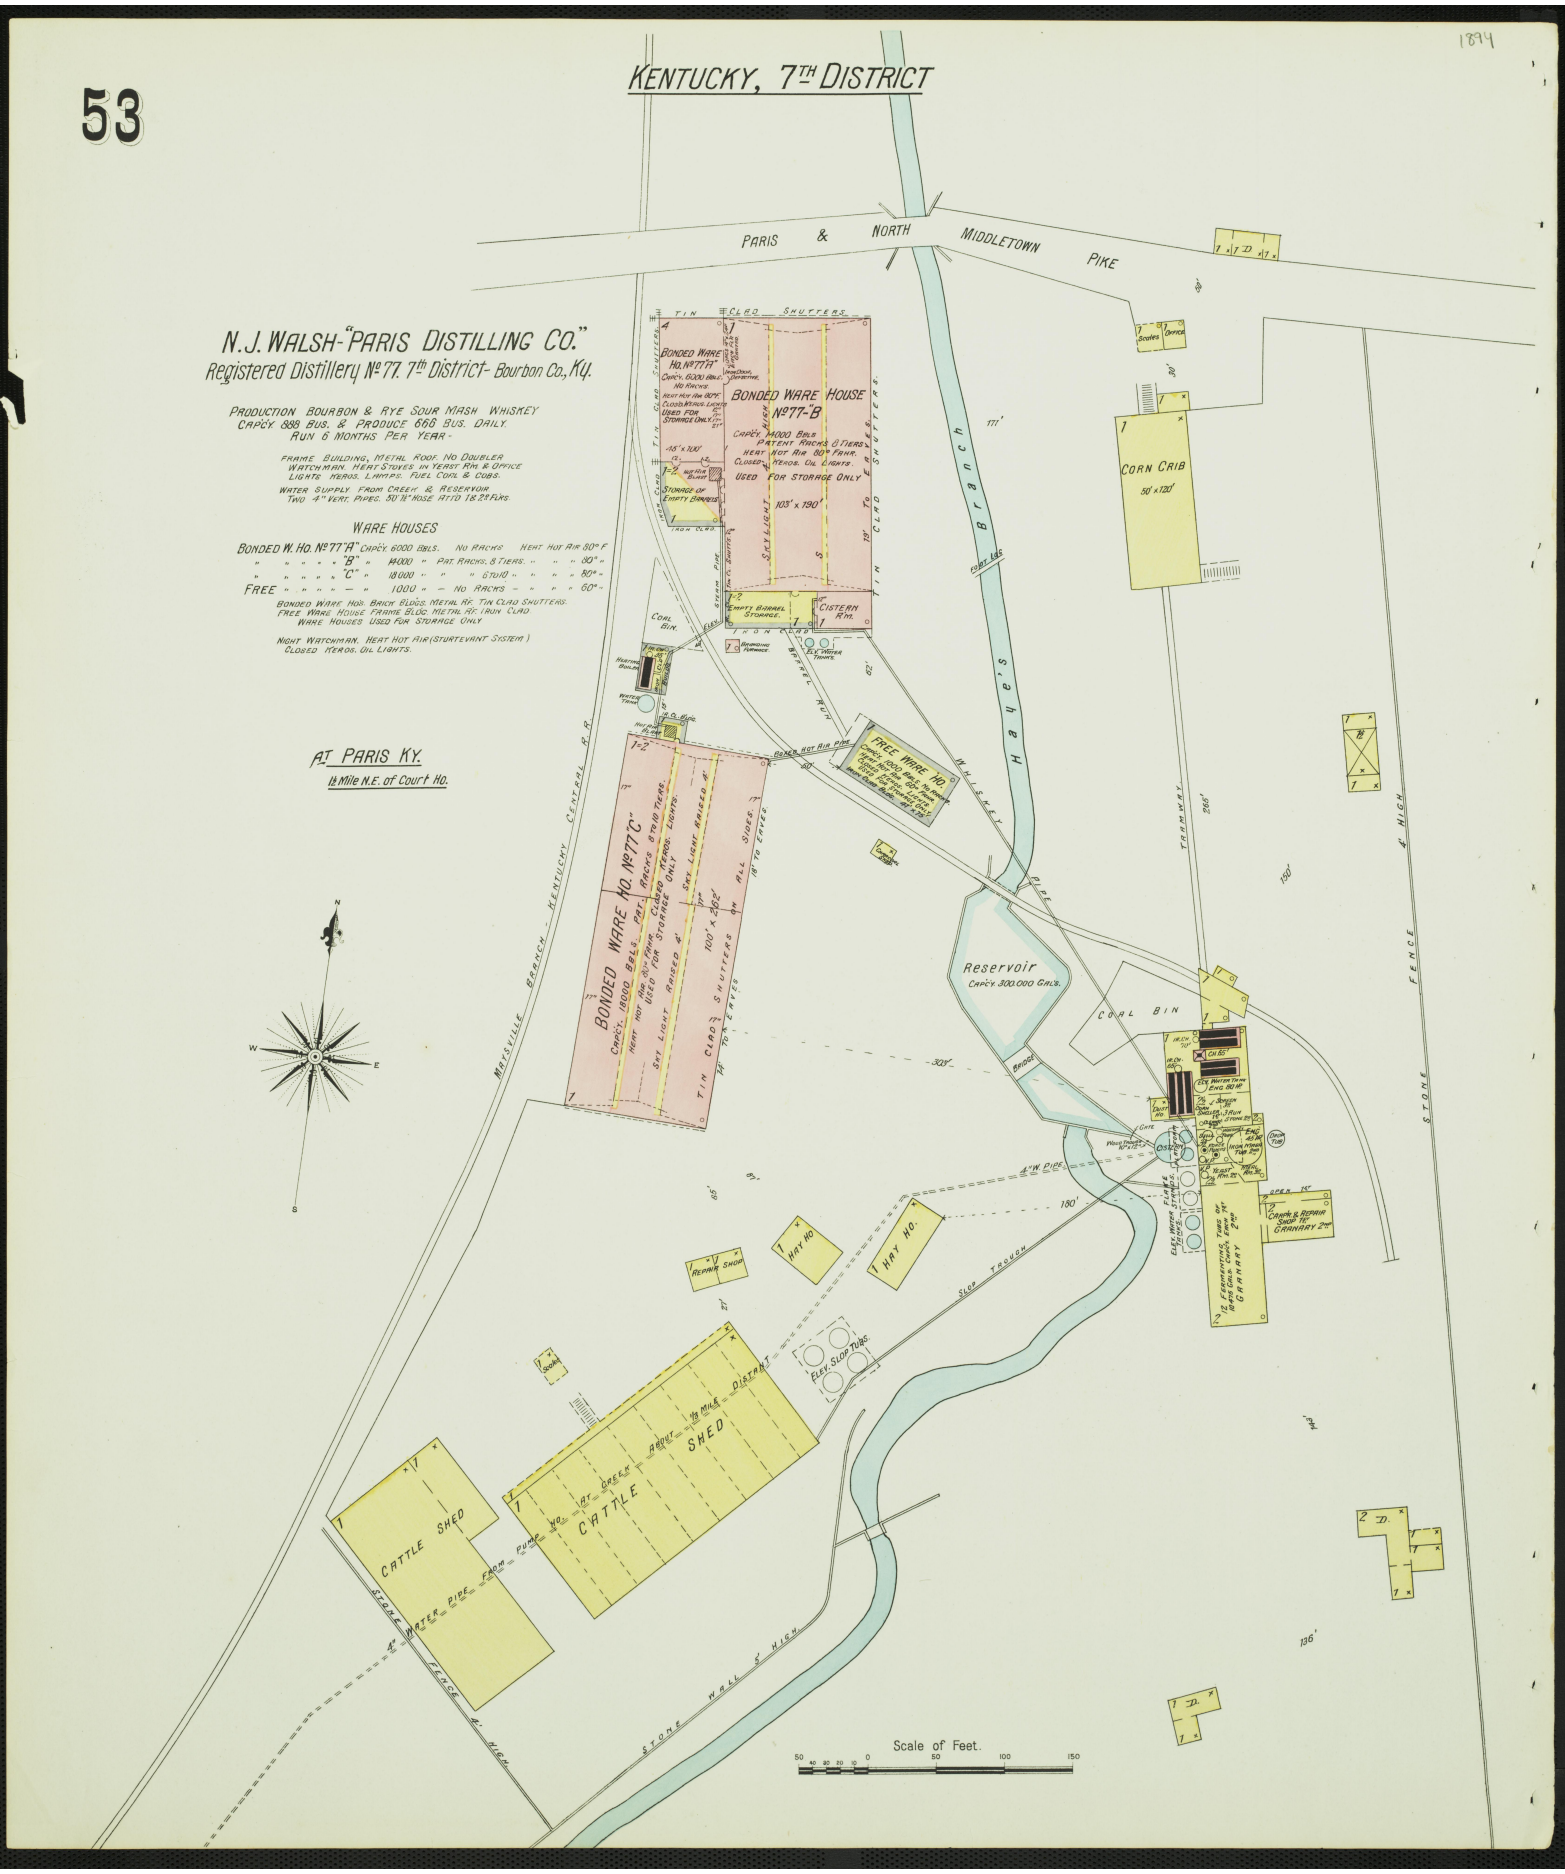
53
1894
KENTUCKY, 7TH DISTRICT
N.J. WALSH-"PARIS DISTILLING CO."
Registered Distillery No 77. 7th District- Bourbon Co., Ky.
PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAP'CY. 888 BUS. & PRODUCE 666 BUS. DAILY.
RUN 6 MONTHS PER YEAR-
FRAME BUILDING, METAL ROOF. NO DOUBLER
WATCHMAN. HEAT STOVES IN YEAST RM. & OFFICE
LIGHTS KEROS. LAMPS. FUEL COAL & COBS.
WATER SUPPLY FROM CREEK & RESERVOIR
TWO 4" VERT. PIPES. 50' 1½" HOSE ATT'D 1 & 2 FLRS.
WARE HOUSES
BONDED W. HO. No 77 "A" CAP'CY. 6000 BBLS. NO RACKS HEAT HOT AIR 80° F
" " " " "B" " 14000 " PAT. RACKS. 8 TIERS. " " " 80° "
" " " " "C" " 18000 " " " 6 TO 10 " " " " 80° "
FREE " " " " — " 1000 " — NO RACKS — " " " 60° "
BONDED WARE HOS. BRICK BLDGS. METAL RF. TIN CLAD SHUTTERS.
FREE WARE HOUSE FRAME BLDG. METAL RF. IRON CLAD.
WARE HOUSES USED FOR STORAGE ONLY
NIGHT WATCHMAN. HEAT HOT AIR (STURTEVANT SYSTEM)
CLOSED KEROS. OIL LIGHTS.
AT PARIS KY.
1½ Mile N.E. of Court Ho.
PARIS & NORTH MIDDLETOWN PIKE
TIN CLAD SHUTTERS
BONDED WARE HO. No 77 "A"
BONDED WARE HOUSE No 77-"B"
CAP'CY. 14000 BBLS
PATENT RACKS 8 TIERS
HEAT HOT AIR 80° FAHR.
CLOSED KEROS. OIL LIGHTS.
USED FOR STORAGE ONLY
103' x 190'
STORAGE OF EMPTY BARRELS
EMPTY BARREL STORAGE.
CISTERN RM.
COAL BIN.
FREE WARE HO.
BONDED WARE HO. No 77 "C"
CAP'CY. 18000 BBLS. PAT. RACKS 8 TO 10 TIERS.
HEAT HOT AIR. RUN FAHR. CLOSED KEROS. LIGHTS.
USED FOR STORAGE ONLY
SKY LIGHT RAISED 4'
TIN CLAD SHUTTERS ON ALL SIDES.
18' TO EAVES
Hayes Branch
WHISKEY PIPE
CORN CRIB
50' x 120'
Scales
OFFICE
TRAMWAY
Reservoir
CAP'CY. 300,000 GALS.
COAL BIN
BRIDGE
MAYSVILLE BRANCH KENTUCKY CENTRAL R.R.
STONE FENCE 4' HIGH
4" W. PIPE
HAY HO.
HAY HO.
REPAIR SHOP
SLOP TROUGH
ELEV. SLOP TUBS.
CATTLE SHED
CATTLE SHED
4" WATER PIPE FROM PUMP HO. AT CREEK ABOUT ½ MILE DISTANT
STONE FENCE 4' HIGH
STONE WALL 5' HIGH
Scale of Feet.
50 40 30 20 10 0 50 100 150

1894

54

KENTUCKY 7th DISTRICT

VERSAILLES 3rd & McCRACKENS MILL PIKE

GLENN'S Creek

GLEN SPRING

CATTLE SHED 46' × 139'

STONE FENCE

CORN CRIB

WHISKEY PIKE

BONDED WARE HO. CAPCY 9000 BBLS - PAT RACKS - 7 TO 9 TIERS - USED FOR STORAGE ONLY

CORN CRIB

VACANT FIELDS

4 Miles N. of VERSAILLES KY.

C. STEGE - GLEN SPRING DISTILLERY CO.

Registered Distillery No 57. - 7th Distr. Woodford Co. Ky.

PRODUCTION BOURBON SOUR MASH WHISKEY - CAPCY 179 BUSHELS PER DAY - RUN 5 MONTHS OF YEAR - STONE BUILDING METAL ROOF - FIRE UNDER DOUBLER - WATCHMAN WHEN RUNNING - NO CLOCK - NO HEATING - FUEL COAL - CLOSED KEROSENE LIGHTS - 100' 1/4 HOSE

BONDED WARE HO. CAPCY 9000 BBLS - PAT. RACKS - 7 TO 9 TIERS - STONE BUILDING METAL ROOF - CLOSED KEROS LIGHTS - NO HEATING - BUILDING USED FOR STORAGE ONLY -

DISTILLERY

L & N. R.R.

RAILROAD ST.

P.O.

JAIL IRON CLAD

TOBACCO WARE HO.

NEGRO SHANTIES

ALLEY

GRATZ ST.

CATTLE SHED 45' × 385'

CATTLE SHED 388' LONG

DISTILLERY

OFFICE

FREE WARE HO. No 2 CAPCY 1000 BBLS - NO RACKS - NO HEATING

WELL

WAGON SHED

BONDED WARE HO. No 9 A CAPCY 12000 BBLS - PAT RACKS - 11 TIERS - NO HEATING

BONDED WARE HO. No 9 B CAPCY 18000 BBLS - PAT. RACKS - 13 TIERS - STEAM HEAT

BONDED WARE HO. No 9 C CAPCY 10000 BBLS - PAT RACKS - 11 TIERS - STEAM HEAT

FREE WARE HO. No 9 D CAPCY 800 BBLS - PAT RACKS - 5 TIERS - NO HEATING

CISTERN IN BRICK

DEPOT

DUDLEY

WARFIELD ST.

NEGRO SHANTIES

LOUISVILLE & SOUTHERN R.R.

S. J. GREENBAUM

BELLE of ANDERSON - GLENARME DISTILLERY

Formerly run as M.J. HAYDEN - T.S. EDWARDS

Registered Distillery No 9. - 7th Distr. Woodford Co. Ky.

Also Run as ARLINGTON DISTILLING CO. - T.J. MONARCH - WOODFORD DISTILLING CO. - CRABFELDER & TACHAU - STEIG REISLING - EMIL STERN

PRODUCTION BOURBON & RYE WHISKIES

CAPCY 900 BUSHELS PER DAY - RUN 6 MONTHS OF YEAR - BRICK & FRAME BUILDINGS - METAL ROOF - FIRE UNDER DOUBLER - NIGHT WATCHMAN ABOUT 6 MONTHS OF YEAR - NO CLOCK - ONE STOVE IN YEAST RM - CLOSED LAMP OIL LIGHTS - FUEL COAL - TWO LARGE F. PUMPS CAP. 150 GALS PER MINUTE EACH - 250' 1¼" HOSE WATER SUPPLY FROM SPRING AND DRIVEN WELLS -

BONDED WARE HO.	No 9 A	CAPCY 12000 BBLS	PAT. RACKS	11 TIERS	NO HEATING	
FREE	Do.	No 9 B	" 800	" "	5 "	"
BONDED	Do.	No 9 C	" 10000	" "	11 "	STEAM HEAT
Do.	Do.	No 9 D	" 18000	" "	13 "	" "
FREE	Do.	No 9 E	" 200	" NO RACKS		NO HEATING

WARE HOUSES A-B-C & D ARE FRAME BUILDINGS - IRON CLAD ALL SIDES - METAL ROOF - WARE HOUSE E - FRAME BUILDING METAL ROOF -

NIGHT WATCHMAN 3 MONTHS OF YEAR - NO CLOCK - LIGHTS LARD OIL DARK LANTERNS -

AT MIDWAY KY.

Lee's Branch

VACANT FIELDS

Scale of Feet. 50 0 50 100 150

1894

KENTUCKY, 7TH DISTRICT

THE PEACOCK DISTILLERY CO. – Formerly FORD and BOWEN

Registered Distillery No 10, – 7th Distr. Bourbon Co., Ky.

PRODUCTION, BOURBON & RYE SOUR MASH WHISKIES.

CAPCY. 313 BUS. PER DAY. RUN FULL CAPCY ABOUT 5 MOS. PER YEAR.
STONE AND FRAME BLDG. – METAL ROOF

NIGHT WATCHMAN & CLOCK. ONE STATION AT WARE HO "A" – POWER WATER & STEAM.
HEAT STOVES. – FUEL COAL & COBS. – LIGHTS KEROSENE, – 150' 1½" HOSE.

BONDED W. HO. NO 10. "A" CAPCY 3400 BBLS. – PATENT RACKS. – 5 TO 7 TIERS. – NO HEATING. – STOVE IN OFFICE
" " " 10. "B" " 3000 " " " 5 " 7 " " " "
FREE WARE HO. " " " 650 " " " 5 " 7 " " " "

BLDGS FRAME. – IRON CLAD. – METAL ROOF. – USED FOR STORAGE ONLY.
NIGHT WATCHMAN & CLOCK. – ONE STATION IN OFF. IN WARE HO "A" – NO LIGHTS.

Situated 3½ Miles N. of PARIS
and ½ Mile E. of KISERTON

BONDED WARE HO. No 10. "A"
60' x 110'
CAPCY. 3400 BBLS. – PATENT RACKS. – 5 TO 7 TIERS.
USED FOR STORAGE ONLY.

FREE WARE HO. 60' x 110'

BRANDING & BARREL SHED

IRON CLAD BLD'G.

BONDED WARE HO. No 10. "B"
60' x 208'
CAPCY. 3000 BBLS. – PATENT RACKS. – 5 TO 7 TIERS.
USED FOR STORAGE ONLY.

IRON CLAD BLD'G.

CATTLE SHED

DRIVE

WHISKEY PIPE

PARIS and KISERTON TURN PIKE

DISTILLERY

CORN CRIB 30' x 80'

ICE HO.

COOPER SHOP 25' x 50'

OFFICE

Stoner Creek

Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY 7TH DISTRICT

G. G. WHITE CO. "CHICKEN COCK DISTILLERY"

formerly G. G. WHITE MFG CO. - WHITE MFG ALEXANDER -

Registered Distillery No 14. - 7th Distr. Bourbon Co. Ky.

PRODUCTION, BOURBON WHISKEY - SOUR MASH

CAPCY 600 BUSHELS PER DAY - PRODUCE 200 BUSHELS PER DAY - RUN 6 MONTHS OF YEAR -

DISTILLERY CONSTRUCTED OF BRICK & FRAME METAL ROOF - FIRE UNDER DOUBLERS -

NIGHT WATCHMAN - NO CLOCK - HEAT STOVES, 1 STOVE IN CISTERN RM - OPEN & CLOSED YEMOR LAMPS - FUEL COAL & COBS -

WATER SUPPLY FROM CREEK - 1 PUMP 100 1/2" HOSE -

COOPER SHOP

CATTLE SHED

STORAGE OF MATERIAL

7½ PARIS KY.
¼ MILE N.E. of Court Ho.

SLOP TUBS

CORN CRIB
36' x 100'

SKID

W.C.

HEATING BLR

BONDED WARE HO. No 5. E.
CAPCY 1500 BBLS - PAT. RACKS - 6 TO 9 TIERS
USED FOR STORAGE ONLY - STEAM HEAT
SKYLIGHT RAISED 4'
112' x 122'
18' TO EAVES

BONDED WARE HO. No 6. F.
CAPCY 9728 BBLS - PAT. RACKS - 6 TO 9 TIERS -
USED FOR STORAGE ONLY - STEAM HEAT -
SKYLIGHT RAISED 4'
IRON SHUTTERS ALL SIDES
100' x 155'
15' TO EAVES

STEAM PIPE

IRON SHUTTERS

IRON TROUGH

SLOP TROUGH

PUMPING HOUSE

IRON SHUTTERS

6" W. PIPE
2 INCH TO TWIN CREEK

LOW MOUNT TUB

DOUBLERS

BEER TROUGH

CISTERN PUMP

FLOOR DRAIN

IN WATER TANK

IN COOK ROOM

IN CYCLE MILL RM

CAST IRON TUBS

ENG. 30 HP

BOILER 30 HP

ENG. 30 HP

BOILER 30 HP

METAL RM 25' x 46'

CORN CRIB
41' x 65'

SCALES

COOLER

DISTILLERY

CISTERN RM

FREE WARE HO. No 1. A.
CAPCY 4600 BBLS - NO RACKS -
USED FOR STORAGE ONLY - NO HEAT & STOVE IN CISTERN RM -
40' x 100'

FREE WARE HO. No 2. B.
CAP 1800 BBLS - NO RACKS -
USED FOR STORAGE ONLY - NO HEATING -
24' x 60'

FREE WARE HO. No 3. C.
CAPCY 3400 BBLS - PAT. RACKS -
7 TO 10 TIERS
USED FOR STORAGE ONLY - NO HEATING -
50' x 65'

FREE WARE HO. No 4. D.
CAPCY 1000 BBLS - NO RACKS -
USED FOR STORAGE ONLY - NO HEATING -
50' x 65'

CISTERN

MAYSVILLE AND LEXINGTON PIKE

STONE FRAME

OLD SCHOOL HO

Stoner Creek

Scale of Feet.
50 40 30 20 10 0 50 100 150

VACANT FIELDS

6 Miles N. of Paris Ky.
2½ Miles E. Shawhan Station

BOURBON DISTILLING CO.

Formerly H. C. BOWEN

Registered Distillery No 102. - 7th Distr. Bourbon Co. Ky.

PRODUCTION, BOURBON & RYE SOUR MASH WHISKIES

CAPCY 200 BUSHELS PER DAY - RUN 6 MONTHS OF YEAR -

FRAME BUILDING IRON CLAD METAL ROOF - STEAM DOUBLER -

NIGHT WATCHMAN WHEN RUNNING - NO CLOCK - HEAT STOVE IN YEAST RM & OFFICE CLOSED KEROSENE LIGHTS - FUEL COAL & COBS - 100 1/2" HOSE -

BONDED WARE No. 102. CAPCY 6400 BBLS - PARTLY RACKED - 5 TO 7 TIERS -

NIGHT WATCHMAN WHEN RUNNING - NO CLOCK - NO HEAT - NO LIGHTS - FRAME BUILDING PARTLY IR CLAD - METAL ROOF -

IRON CLAD

BONDED WARE No. 102.
CAPCY 5400 BBLS - PAT. RACKS - 5 TO 7 TIERS
72' x 125'

CORN CRIB
45' x 98'

CATTLE SHED
39' x 100'

EMPTY BARREL STORAGE

BONDED WARE No. 102.
CAPCY 3200 BBLS - NO RACKS
62' x 103'

CISTERN No 1 IR CLAD

SLOP TUBS

LARGE TROUGH

IRON TROUGH

RUDDELLS MILLS AND SHAWHAN STATION PIKE

STONE FRAME

DISTILLERY

4" W. PIPE

SHED

J. A. GRIMES

Registered Distillery No 79. - 7th Distr. Bourbon Co. Ky.

PRODUCTION, BOURBON WHISKEY - HAND MADE SOUR MASH -

CAPCY 30 BUSHELS PER DAY - RUN ABOUT 4 MONTHS OF YEAR

NO WATCHMAN - NO LIGHTS - NO HEATING - NO FIRE APPLIANCES

FRAME BUILDING METAL & SHINGLE ROOF - FIRE UNDER DOUBLER -

BONDED WARE HO. CAPCY 450 BBLS - NO RACKS - NO LIGHTS - NO HEATING - STONE & FRAME IRON CLAD BUILDING - METAL ROOF -

WATER TANK

DOUBLER

STILL

CISTERN

FERMENTING ROOM

DISTILLERY

2 Miles S. of Millersburg Ky.
8 Miles N.E. of Paris Ky.

BONDED W. HO.
CAP 450 BBLS
NO RACKS
37' x 65'

TOBACCO BARN
46' x 65'
1ST

VACANT FIELDS

WARE HOUSES

FREE WARE HO. No 1. A. CAPCY 4500 BBLS - NO RACKS - NO HEATING (STOVE IN CIST. RM)
Do. Do. Do. No 2. B. " 1800 " " " "
Do. Do. Do. No 3. C. " 3400 " PAT. RACKS - 7 TO 10 TIERS - NO HEATING
Do. Do. Do. No 4. D. " 2000 " NO " "
BONDED WARE HO. No 5. E. " 11500 " PAT. RACKS 6 TO 9 TIERS
Do. Do. Do. No 6. F. " 9728 " " " 6 TO 9 "

WARE HOUSES CONSTRUCTED OF BRICK METAL ROOF & CORNICE - ALL OPENINGS IR CLAD - OCCUPIED FOR STORAGE PURPOSES ONLY -

WATCHMAN - NO CLOCK - CLOSED KEROS. LIGHTS - NO HEATING - STEAM PIPES IN W. HOS. No 5 E. & No 6 F. NOT USED IN 2 YEARS -

57

KENTUCKY, 7TH DISTRICT

1894

LABROT AND GRAHAM - "OLD OSCAR PEPPER" DISTILLERY

Registered Distillery No 52, 7th District - Woodford Co, Ky.

Situated 10 Miles S.E. of FRANKFORT KY.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY. 200 BUS. PER DAY. RUN ABOUT 7 MONTHS PER YEAR

STONE BUILDING - METAL ROOF. NO WATCHMAN, NO HEATING
FUEL COAL. LIGHTS LARD OIL LANTERNS. FIRE DOUBLER.
TWO FORCE PUMPS. 2" I.P. TO 2nd FLR. 100' OF 1" HOSE.

WARE HOUSES

BONDED WARE HO. No 52 "A" CAPACITY 2700 BARRELS.
PAT. RACKS, 12 TIERS.

" " " No 52 "B" CAPACITY 7500 BARRELS.
PAT. RACKS 12 TIERS.

" " " No 52 "C" CAPACITY 5000 BARRELS
PAT. RACKS 12 TIERS.

FREE " " CAPCY 1800 BBLS. PAT. RACKS, 12 TIERS.

STONE BUILDS. METAL ROOF - TIN CLAD SHUTTERS.
NO WATCHMAN. LIGHTS LARD OIL DRAW LANTERNS
HEAT STEAM. WARE HOS. USED FOR STORAGE ONLY.

Kentucky River

Top of Bluff

North Fork of Glen's Creek

DISTILLERY

2 ENG. 80 HP

CORN MILL 70

STILL

STONE VAT

MASH FLOOR 2nd

MEAL RM. 3rd

F. RM. 4th

TANK

TUBS 16' DEEP

CORN HO.

32' x 85'

WALK

WATER TANK

WATER TANK

COOPER SHOP

BRANDING & LOWER SHED

WALK

BONDED WARE HO. No 37.

CAPCY. 17,000 BBLS. PAT. RACKS. 10 TIERS.
USED FOR STORAGE ONLY. STEAM HEAT

95' x 108'

100' x 140'

CISTERN RM.

FREE WARE HO.

OFFICE

ELEVD. WALK

Situated 1 Mile S.E. of FRANKFORT KY.

125' TO OLD SAW MILL (DISMANTLED)

L. & N. R.R.

SLOP TROUGH

OLD COAL ELEVATOR

COOPER SHOP

BONDED WARE HO. No 52 "B"

BONDED WARE HO. No 52 "A"

FREE WARE HO.

BONDED WARE HO. No 52 "C"

CORN CRIB

GRANARY

DISTILLERY

WALK OVER TRESTLE

NO EXPOSURE

DRIVE

JOHN COCHRAN AND CO. - "SPRING HILL DISTILLERY"

Registered Distillery No 37, 7th Distr. - Franklin Co., Ky.

PRODUCTION BOURBON & RYE HAND MADE SOUR MASH WHISKIES
CAPCY. 600 BUS. & PRODUCT ABOUT 300 BUS. PER DAY.

RUN 5 MONTHS PER YEAR. NIGHT & SUNDAY WATCHMAN - CLOCK 5 STATIONS.
HEAT STOVE IN YEAST RM. & OPEN GRATE IN OFFICE. FUEL COAL
LIGHTS KEROS. LAMPS & LANTERNS. TWO FORCE PUMPS. 200' 1" HOSE
STONE & FRAME BLDS. METAL & TILE UNDER DOUBLER.

BONDED WARE HO. CAPACY 17,000 BBLS. PATENT RACKS 10 TIERS
FREE " " " 1,000 " " " " 10 "
STONE BUILDING. METAL & TIN CLAD SHUTTERS ALL SIDES
USED FOR STORAGE ONLY. NIGHT WATCHMAN & CLOCK.
HEAT STEAM. CLOSED KEROS. OIL LIGHTS.

CATTLE PENS

SLOP TUBS

Scale of Feet.

50 40 30 20 10 0 50 100 150

AT STAMPING GROUND
9 Miles N.W. of Georgetown.

MAIN ST. OR GEORGETOWN PIKE

MULLINS AND CRIGLER - "BUFFALO SPRING DISTILLERY"

Registered Distillery No 105, 7th District - Scott Co., Ky.

PRODUCTION BOURBON SOUR MASH WHISKEY. CAPCY. 100 BUS. PER DAY.
RUN 6 MONTHS PER YEAR.

FRAME BUILDING - METAL ROOF. NIGHT WATCHMAN WHEN RUNNING.
HEAT STOVE IN YEAST RM & OFFICE. FUEL COAL.
CLOSED KEROS. LIGHTS & CANDLES. 70' 1" HOSE.
FOR UNDER DOUBLER.
BONDED WARE HO. CAPCY. 2500 BBLS. NO RACKS. NO HEATING
CLOSED KEROS. LIGHTS. FRAME BLDG. IRON CLAD. METAL ROOF.

BONDED WARE HO. CAPCY. 2500 BBLS. NO RACKS. NO HEATING IR. CLAD BLDG. 50' x 100'

DISTILLERY

OFFICE

FURNITURE

BANK

DWELLING

KENTUCKY CENTRAL R.R.

VACANT

KENTUCKY - 7TH DISTRICT

VACANT FIELDS.

BONDED WARE HO. No 96. E. Cap. 3000 BBLS. PAT. RACKS - 6 TIERS. USED FOR STORAGE ONLY. 50'X 115' - 16' TO EAVES - IRONCLAD

AT FARMDALE
8 Miles S.W. of FRANKFORT

BONDED WARE HO. No 96 D. Cap. 2400 BBLS. PAT. RACKS - 6 TIERS. USED FOR STORAGE ONLY. 50'X 100' - 16' TO EAVES - IRONCLAD

J. N. BLAKEMORE - ARNOLD SPRING DISTILLERY
Registered Distillery No. 96 - 7th Distr. Franklin Co. Ky

PRODUCTION - BOURBON WHISKEY - HAND MADE SOUR MASH.
CAPCY. 204 BUS. PER DAY - PRODUCE ABOUT 100 BUS PER DAY - RUN 7 MONTHS IN THE YEAR.
FRAME BUILDING - METAL ROOF - FIRE UNDER DOUBLER.
NIGHT WATCHMAN - NO CLOCK - FUEL COAL AND WOOD. LIGHTS KEROSENE - NO HEATING. - F. P. & 100' 1½" HOSE.

BONDED WARE HO. No 96 C. CAP. 800 BBLS - NO RACKS. FRAME BLDG - IRONCLAD - METAL ROOF

BONDED WARE HO. No 96 C. CAP. 800 BBLS - NO RACKS. 30'X12' - 18' TO EAVES - IR. CLAD. USED FOR STORAGE ONLY.

BONDED WARE HO. No 96. B. CAP. 1600 BBLS. NO RACKS. FRAME BLDG - SHINGLE & METAL ROOF

Do. Do. No 96 C. CAPCY 800 BBLS - NO RACKS. FRAME BLDG - IRONCLAD - METAL ROOF

Do. Do. No 96 D. CAPCY 2400 BBLS - PAT. RACKS - 6 TIERS. FRAME BLDG - IRONCLAD - METAL ROOF

Do. Do. No 96 E. CAPCY 3000 BBLS - PAT. RACKS - 6 TIERS. FRAME BLDG - IRONCLAD - METAL ROOF

NIGHT WATCHMAN - LIGHTS KEROSENE CLOSED LAMPS - NO HEATING.
WARE HOUSES USED FOR STORAGE PURPOSES ONLY.

BONDED WARE HO. No 96. B. CAP. 1600 BBLS. NO RACKS. USED FOR STORAGE ONLY.

FORMERLY BONDED W. HO "A" 1 EMPTY BARREL STORAGE 32'X 90'

FREE WARE HO. 30'X 32'

VACANT FIELDS

DISTILLERY

SLOP TROUGH

SLOP TANK

FERMENTING MASH FLOOR 2nd

CISTERN RM

DOUBLER

WATER TANK

FERMENTING TUBS 88' BEER STILLS 1 IR. CLAD MASH FL. 1ST MERL RM ENG. 65 H.P. ONE RUN OF STONES. 15 & 8

H. CK. NOT USED

SCALES

69'

FRANKFORT AND LAWRENCEBURG PIKE

J. & J. M. SAFFEL - CEDAR RUN DISTILLERY
Registered Distillery No. 91 - 7th Distr. Franklin Co. Ky

PRODUCTION - BOURBON WHISKEY
HAND MADE SOUR MASH.
CAPCY 100 BUS. PER DAY - RUN SIX MONTHS IN THE YEAR.
BRICK & FRAME BUILDING - METAL ROOF
DOUBLER RUN BY STEAM.
NIGHT WATCHMAN - NO CLOCK. - HEAT STEAM IN OFFICE - ONE STOVE IN DISTILLERY. FUEL COAL - NO LIGHTS. 100' 1½" HOSE.

BONDED WARE HO. CAP. 6000 BBLS. NO RACKS - NO HEATING. - CLOSED KEROSENE LIGHTS - BRICK BLDG - METAL ROOF - TINCL. SHS

BONDED WARE HO. - CAP. 1000 BBLS. NO RACKS - NO HEATING. CLOSED KEROSENE LIGHTS. FRAME BLDG - METAL ROOF.

WARE HOUSES USED FOR STORAGE ONLY.

BONDED WARE HO. CAP. 1000 BBLS. NO RACKS - NO HEATING. USED FOR STORAGE ONLY.

BONDED WARE HOUSE CAPCY. 6000 BBLS. NO RACKS. USED FOR STORAGE ONLY. 45'X 92'. 40'X 110'. 42'X 110'. ELEV.

CATTLE SHED

DISTILLERY

FERMENTING TUBS

SLOP TUB

SLOP TROUGH

SCALES

OFF. 20'

45'X 105'

MASH TUB 2nd

ONE RUN OF STONES MERL RM 3rd ENG. 40 H.P.

CISTERN RM

STILL

WATER TANK

RAKE

WELL 180' DEEP.

DRY WELL FROM CREEK.

Situated 2 Miles S. of FRANKFORT. KY

FRANKFORT AND LAWRENCEVILLE TURNPIKE

TOP OF BANK

Cedar Run

Kentucky River

W. A. GAINES AND CO. - "OLD CROW" DISTILLERY
Registered Distillery No. 106 - 7th Distr. Woodford Co. Ky

PRODUCTION BOURBON AND RYE - HAND MADE SOUR MASH WHISKEY
CAPCY 600 BUS - PRODUCE ABOUT 700 BUS - PER DAY - RUN 5 MONTHS IN THE YEAR.
STONE AND FRAME BLDG - METAL AND GRAVEL ROOF - FIRE UNDER DOUBLER.

NIGHT WATCHMAN AND CLOCK - 7 STATIONS - ONE STATION IN MERL ROOM - SIX STATIONS OUTSIDE -
FUEL COAL AND WOOD - LIGHTS KEROSENE - OPEN AND CLOSED LAMPS -
NO HEATING - OPEN GRATE IN OFFICE ONLY.

GRINNELL SPRINKLERS THRO'OUT DISTILLERY - WARE HOUSES AND CISTERN ROOMS - 257 SPRINKLER HEADS IN DISTILLERY - SUPPLIED FROM IRON TANK 15000 GALS - ELEV'D 80FT - ON BRICK BASE - WITH STEAM PIPE IN TOWER. - ALSO BY TWO LARGE DEANE F. PUMPS.

WATER SUPPLY FROM SPRING AND CREEK - 120' 1½" HOSE.

BARREL HO. 1 STORY 50'X 125' FURNACE IR. CLAD

Negro Shanties

TIN CLAD SHUTTERS.

BONDED WARE HO. No 106 - C. CAP. 7500 BBLS PAT. RACKS - 11 TIERS - 503 SPRINKLER HEADS 65'X 155' USED FOR STORAGE ONLY.

BONDED WARE HO. No 106. B. CAP. 6000 BBLS - PAT. RACKS - 11 TIERS - 408 SPRINKLER HEADS 65'X 125' SMALL SKYLIGHTS NO HEATING. USED FOR STORAGE ONLY.

TIN CLAD SHUTTERS

PLATFORM

USED FOR STORAGE ONLY.

BONDED WARE HO. No 106 - D. CAP. 4800 BBLS. PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY. 65'X 95' SMALL SKYLIGHTS NO HEATING 330 SPRINKLER HEADS

FREE WARE HO G. CAP. 3300 BBLS PAT. RACKS - 11 TIERS (STORAGE ONLY) 65'X 55' SMALL SKYLIGHTS 234 SPRINKLER HEADS.

BONDED WARE HO. No 106 - E. CAP. 3000 BBLS - PAT. RACKS - 11 TIERS - SMALL SKYLIGHTS - 331 SPRINKLER HEADS - NO HEATING - USED FOR STORAGE ONLY 60'X 105'

TIN CLAD SHUTTERS

TRACK FOR CARS

250' TO FR. DWG.

80'

6" W. PIPE

OFFICE

SCALES

6" W. P.

COOPER SHOP

HOT HO.

BONDED WARE HO. No 106 - F. CAP. 1500 BBLS PAT. RACKS - STAVES 2 - 163 SPRINKLER HEADS 63'X 58'

FREE WARE HO A. 36'X 63' CAP. 900 BBLS - NO RACKS. 40 SPRINKLER HEADS 1 STORAGE ONLY

SHOP

4" W. PIPE

STEAM HEAT USED FOR STORAGE ONLY.

BARREL RUN

COAL PILE

WHISKEY PIPE

SPRING HO.

EAVES LEVEL WITH GRD

POOL

DISTILLERY

ELEV'R

CONVEYER

MASH FLOOR 1ST STONE FLOOR

MERL RM

FERMENTING TUBS

IRON CLAD

CHAR

F.P.

DOUBLER

MASH TUBS

FERMENTING TUBS

IR. CLAD BLDG

GRAIN ELEVATOR CORN SHELLER STONE 18" IRON CLAD CAPCY 20,000 BUS

SHED

CORN CRIB

DUST HO

WATER TANK 10,000 GAL ELEV 80' ABV GRD

CORD WOOD

ARTESIAN WELL 3701' DEEP

RETAINING WALL

4" W. PIPE

Glen's Creek

Scale of Feet.

Situated 4 Miles S.E. of FRANKFORT. KY

WARE HOUSES

FREE WARE HO-		A.	CAP'Y 900 BBLS -	NO RACKS -		40 SPRINKLER HEADS		
BONDED.	Do.	No 106 - B	" 6000 "	PAT. RACKS - 11 TIERS -	408	"	"	
Do.	Do.	No 106 - C.	" 7500 "	Do.	11	"	503	" "
Do.	Do.	No 106 - D	" 4800 "	Do.	11	"	330	" "
Do.	Do.	No 106 E	" 3000 "	Do.	11	"	331	" "
Do.	Do.	No 106 F	" 1500 "	Do.	9	"	143	" " STEAM HEAT
FREE	Do.	G.	" 3200 "	Do.	11	"	224	" "

NIGHT WATCHMAN AND CLOCK - LIGHTS KEROSENE - CLOSED LAMPS
BONDED WARE HO. F. HEATED BY STEAM. - NO HEATING IN OTHERS -
WARE HOS. CONSTRUCTED OF BRICK, WITH METAL ROOF AND CORNICE -
ALL OPENINGS TINCLAD - GRINNELL SPRINKLERS IN EACH - HEADS NOTED ABOVE.
WARE HOUSES USED FOR STORAGE ONLY -

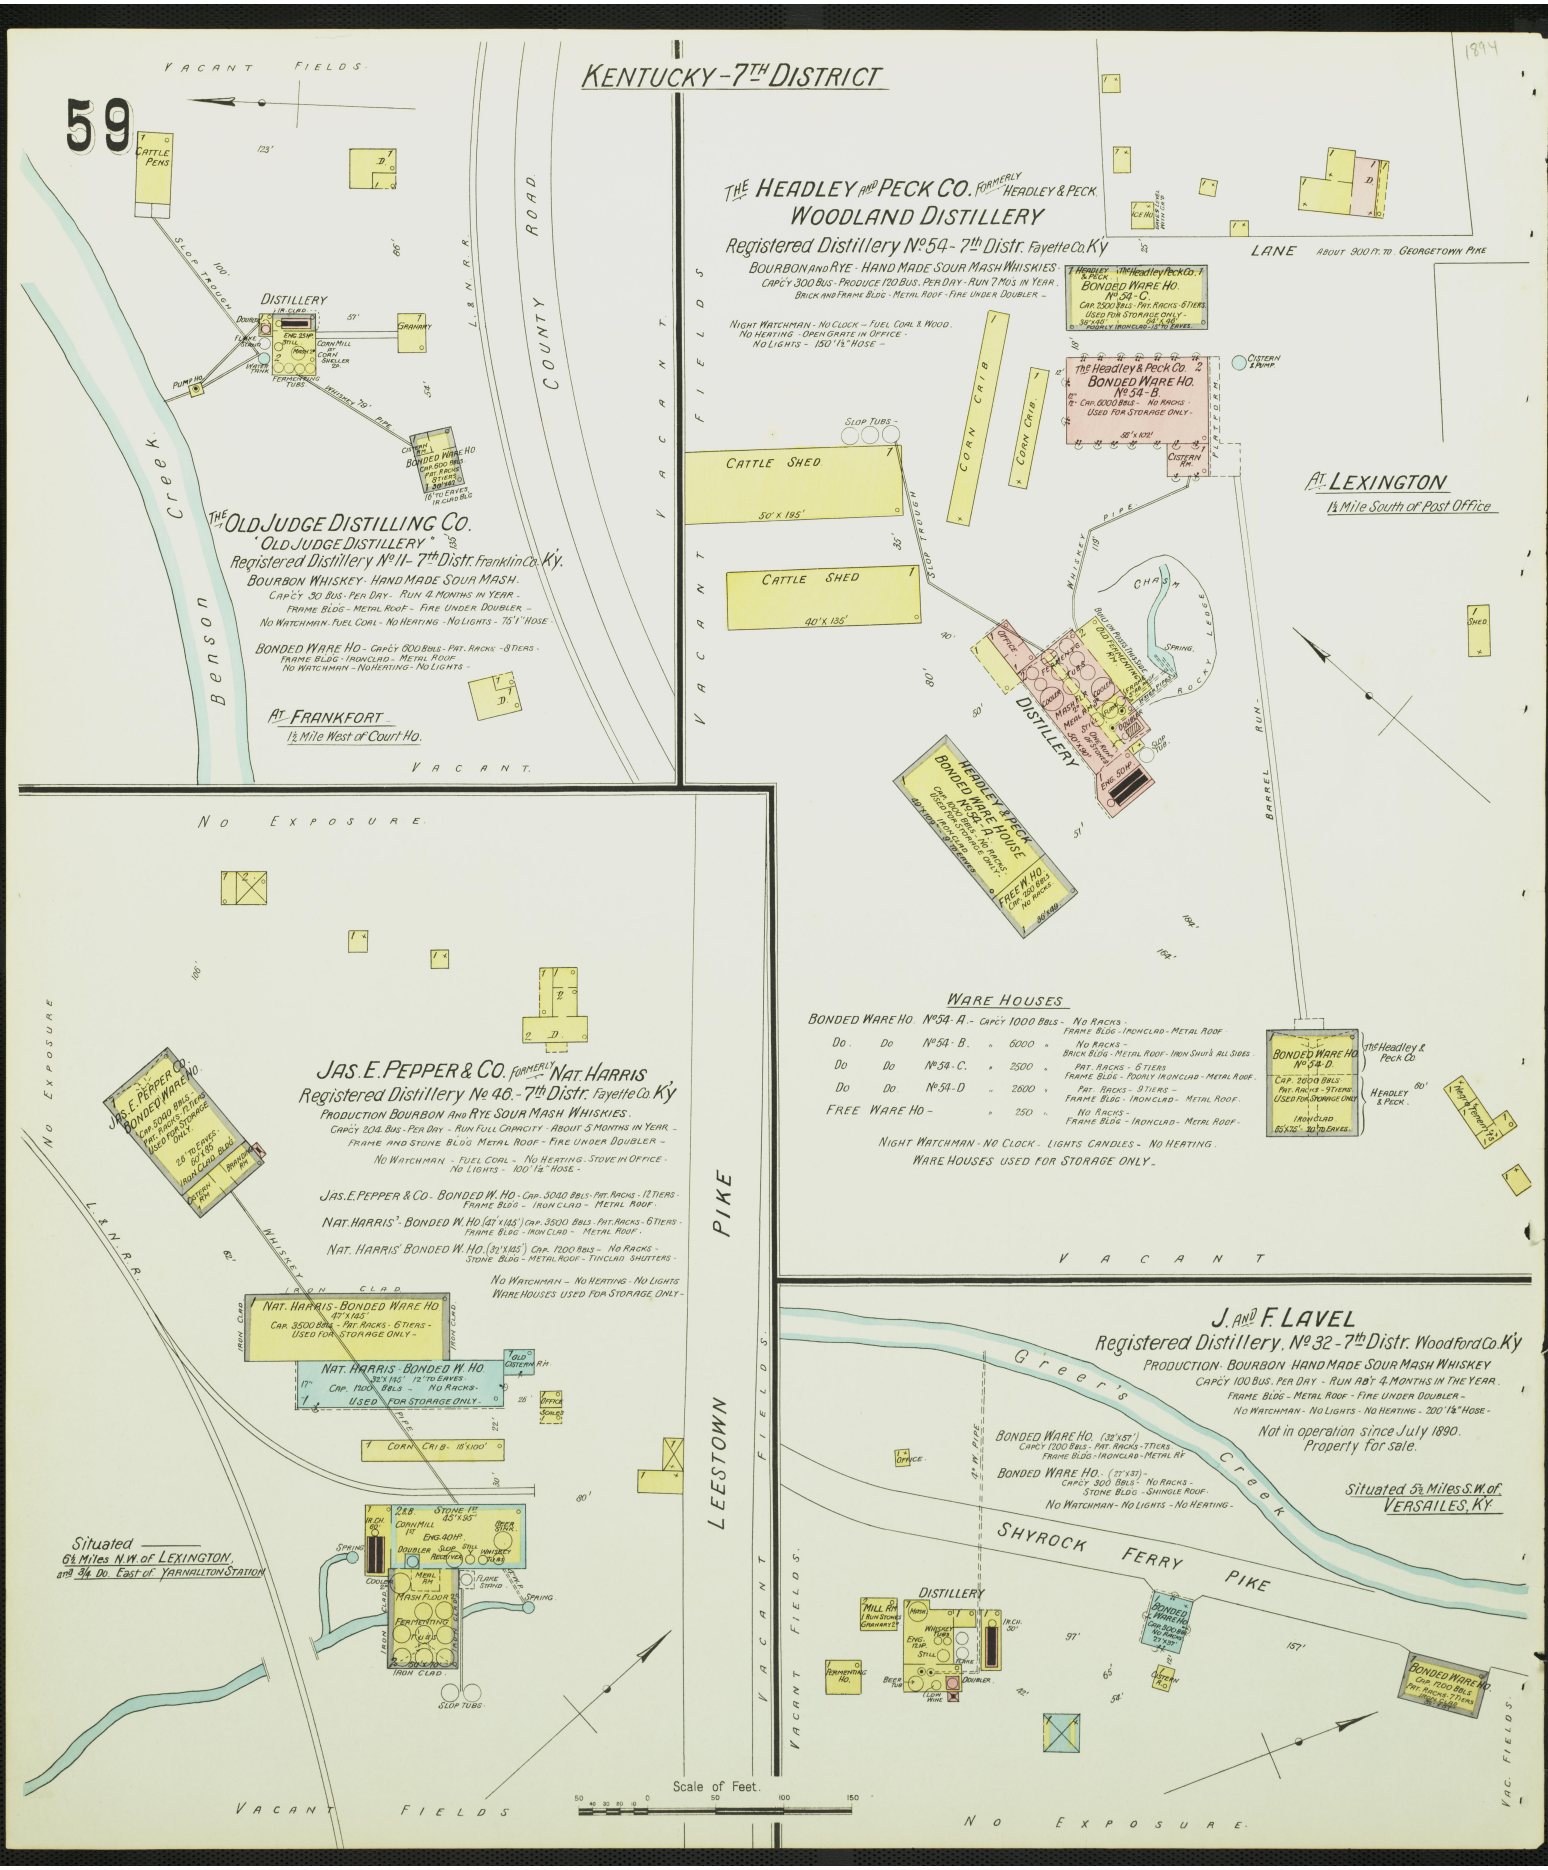
59
KENTUCKY - 7TH DISTRICT
1894
VACANT FIELDS
CATTLE PENS
DISTILLERY
GRANARY
BONDED WARE HO.
THE OLD JUDGE DISTILLING CO.
"OLD JUDGE DISTILLERY"
Registered Distillery No. 11 - 7th Distr. Franklin Co. Ky.
BOURBON WHISKEY - HAND MADE SOUR MASH.
CAP'CY 30 BUS - PER DAY - RUN 4 MONTHS IN YEAR -
FRAME BLDG - METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - FUEL COAL - NO HEATING - NO LIGHTS - 75' 1" HOSE -
BONDED WARE HO - CAP'CY 600 BBLS - PAT. RACKS - 8 TIERS -
FRAME BLDG - IRONCLAD - METAL ROOF
NO WATCHMAN - NO HEATING - NO LIGHTS -
AT FRANKFORT
1½ Mile West of Court Ho.
Benson Creek
COUNTY ROAD
L. & N. R. R.
VACANT
THE HEADLEY AND PECK CO. FORMERLY HEADLEY & PECK.
WOODLAND DISTILLERY
Registered Distillery No. 54 - 7th Distr. Fayette Co. Ky
BOURBON AND RYE - HAND MADE SOUR MASH WHISKIES -
CAP'CY 300 BUS - PRODUCE 120 BUS. PER DAY - RUN 7 MOS IN YEAR.
BRICK AND FRAME BLDG - METAL ROOF - FIRE UNDER DOUBLER -
NIGHT WATCHMAN - NO CLOCK - FUEL COAL & WOOD.
NO HEATING - OPEN GRATE IN OFFICE -
NO LIGHTS - 150' 1½" HOSE -
LANE ABOUT 900 FT. TO GEORGETOWN PIKE
THE HEADLEY & PECK CO. BONDED WARE HO. No. 54 - C.
CAP. 2500 BBLS - PAT. RACKS - 5 TIERS.
USED FOR STORAGE ONLY -
THE HEADLEY & PECK CO. BONDED WARE HO. No. 54 - B.
CAP. 6000 BBLS - NO RACKS -
USED FOR STORAGE ONLY -
CISTERN & PUMP
CORN CRIB
CATTLE SHED
50' x 195'
CATTLE SHED
40' x 135'
SLOP TUBS
WHISKEY PIPE
CHASM
ROCKY LEDGE
DISTILLERY
HEADLEY & PECK BONDED WARE HOUSE No. 54 - A.
CAP. 6000 BBLS - NO RACKS -
USED FOR STORAGE ONLY -
FREE W. HO.
CAP. 250 BBLS
NO RACKS
BARREL RUN
AT LEXINGTON
1½ Mile South of Post Office
WARE HOUSES
BONDED WARE HO. No. 54 - A. - CAP'CY 1000 BBLS - NO RACKS - FRAME BLDG - IRONCLAD - METAL ROOF
DO. DO. No. 54 - B. " 6000 " NO RACKS - BRICK BLDG - METAL ROOF - IRON SHUT'S ALL SIDES
DO. DO. No. 54 - C. " 2500 " PAT. RACKS - 6 TIERS FRAME BLDG - POORLY IRONCLAD - METAL ROOF.
DO. DO. No. 54 - D " 2600 " PAT. RACKS - 9 TIERS - FRAME BLDG - IRONCLAD - METAL ROOF.
FREE WARE HO - " 250 " NO RACKS - FRAME BLDG - IRONCLAD - METAL ROOF -
NIGHT WATCHMAN - NO CLOCK - LIGHTS CANDLES - NO HEATING.
WARE HOUSES USED FOR STORAGE ONLY -
BONDED WARE HO. No. 54 - D.
CAP. 2600 BBLS
PAT. RACKS - 9 TIERS
USED FOR STORAGE ONLY
IRON CLAD
65' x 75' - 20' TO EAVES.
THE HEADLEY & PECK CO.
HEADLEY & PECK.
NO EXPOSURE
JAS. E. PEPPER & CO. FORMERLY NAT. HARRIS
Registered Distillery No. 46 - 7th Distr. Fayette Co. Ky
PRODUCTION BOURBON AND RYE SOUR MASH WHISKIES.
CAP'CY 204 BUS - PER DAY - RUN FULL CAPACITY - ABOUT 5 MONTHS IN YEAR -
FRAME AND STONE BLDG METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - FUEL COAL - NO HEATING - STOVE IN OFFICE -
NO LIGHTS - 100' 1½" HOSE -
JAS. E. PEPPER & CO. - BONDED W. HO. - CAP. 5040 BBLS - PAT. RACKS - 12 TIERS - FRAME BLDG - IRON CLAD - METAL ROOF.
NAT. HARRIS' - BONDED W. HO. (47' x 145') CAP. 3500 BBLS - PAT. RACKS - 6 TIERS - FRAME BLDG - IRON CLAD - METAL ROOF.
NAT. HARRIS' BONDED W. HO. (32' x 145') CAP. 1200 BBLS - NO RACKS - STONE BLDG - METAL ROOF - TINCLAD SHUTTERS -
NO WATCHMAN - NO HEATING - NO LIGHTS
WARE HOUSES USED FOR STORAGE ONLY -
JAS. E. PEPPER CO. BONDED WARE HO.
CAP. 5040 BBLS
PAT. RACKS - 12 TIERS
USED FOR STORAGE ONLY.
26' TO EAVES
60' x 85'
IRON CLAD BLDG.
NAT. HARRIS - BONDED WARE HO.
47' x 145'
CAP. 3500 BBLS - PAT. RACKS - 6 TIERS -
USED FOR STORAGE ONLY -
NAT. HARRIS - BONDED W. HO.
32' x 145' 12' TO EAVES.
CAP. 1200 BBLS - NO RACKS -
USED FOR STORAGE ONLY -
CORN CRIB - 15' x 100'
STONE 1ST 45' x 95'
CORN MILL 1ST
ENG. 40 HP.
DOUBLER
SLOP TUBS
MASH FLOOR
FERMENTING TUBS
IRON CLAD
SPRING
SLOP TUBS
LEESTOWN PIKE
Situated
6½ Miles N.W. of LEXINGTON,
and ¾ Do. East of YARNALLTON STATION
J. AND F. LAVEL
Registered Distillery, No. 32 - 7th Distr. Woodford Co. Ky
PRODUCTION - BOURBON HAND MADE SOUR MASH WHISKEY
CAP'CY 100 BUS. PER DAY - RUN ABT 4 MONTHS IN THE YEAR.
FRAME BLDG - METAL ROOF - FIRE UNDER DOUBLER -
NO WATCHMAN - NO LIGHTS - NO HEATING - 200' 1½" HOSE -
Not in operation since July 1890.
Property for sale.
Situated 5½ Miles S.W. of VERSAILES, KY.
Greer's Creek
BONDED WARE HO. (32' x 57')
CAP'CY 1200 BBLS - PAT. RACKS - 7 TIERS
FRAME BLDG - IRONCLAD - METAL RF
BONDED WARE HO. (27' x 37') -
CAP'CY 300 BBLS - NO RACKS -
STONE BLDG - SHINGLE ROOF.
NO WATCHMAN - NO LIGHTS - NO HEATING -
SHYROCK FERRY PIKE
DISTILLERY
MILL RM.
BONDED WARE HO.
BONDED WARE HO.
CAP. 1200 BBLS
PAT. RACKS - 7 TIERS
IRON CLAD
VAC. FIELDS
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY - 7TH DISTRICT

60

W. A. GAINES AND CO. - HERMITAGE DISTILLERY

Registered Distillery No 9 - 7th Distr. Franklin Co. Ky

PRODUCTION - BOURBON AND RYE, SOUR MASH WHISKIES.
CAPCY 1000 BUS. PER DAY - RUN NIGHT AND DAY FOR 5 MONTHS IN THE YEAR.
DISTILLERY CONSTRUCTED OF CORR. IRON ON STUDDING, WITH METAL ROOF - FIRE UNDER DOUBLERS -

NIGHT AND SUNDAY WATCHMAN - LA GRANDE ELECTRIC CLOCK - NINE STATIONS - (TWO IN DISTILLERY)
LIGHTS INCAND. ELECTRIC AND CANDLES - FUEL COAL - NO HEATING - STOVE AND OPEN GRATE IN OFFICE -

THREE STEAM PUMPS - 1000 2½" HOSE ON TWO CARTS - 200 1½" HOSE IN DISTILLERY -

GRINNELL SPRINKLERS THRO'OUT - 371 SPRINKLER HEADS IN DISTILLERY AND BEER RM.
SPRINKLER SYSTEM SUPPLIED FROM CITY MAINS - 6" CONNECTION - 130 LB PRESSURE PER SQ. IN.
ALSO SUPPLY FROM PRESSURE TANK, CAPCY 45200 GAL - ON 3RD FLOOR OF DISTILLERY - 75 LB PRESSURE

WARE HOUSES

BONDED W. HO.	No 9 - A	CAPCY 3700 BBLS.	NO RACKS		172	SPRINKLER HEADS
Do. Do.	No 9 - B	" 2600 "	"		128	" "
Do. Do.	No 9 - C	" 4000 "	"		180	" "
Do. Do.	No 9 - D	" 4000 "	"		180	" "
FREE Do	E	" 7000 "	PAT. RACKS - 9 TO 12 TIERS		457	" "
BONDED Do	No 9 - F	" 7000 "	" " " 9 - 12	"	457	" "
Do Do	No 9 - G	" 11000 "	" " " 11	"	634	" "
Do. Do.	No 9 - H	" 11000 "	" " " 11	"	634	" "
Do "HOT HO	No 9 - I	" 2500 "	" " " 6	"	144	" " STEAM HEAT 130°

BRICK BLDGS - METAL ROOF & CORNICES - ALL OPENINGS TINCLAD -
LIGHTS, CLOSED LARD OIL LAMPS - NO HEATING EXCEPT IN HOT HO - No 9 - I. STEAM HEAT 130°
GRINNELL SPRINKLERS THROUGHOUT - SPRINKLER HEADS IN EACH AS NOTED.

BONDED FRAME W. HO. CAPCY 2000 BBLS - NO RACKS -
FREE Do Do " 2000 " NO RACKS -
FRAME BLDGS - GRAVEL ROOFS - LIGHTS CLOSED LARD OIL LAMPS - NO HEATING

NIGHT AND SUNDAY WATCHMAN AND CLOCK -
WARE HOUSES A TO H USED FOR STORAGE ONLY.

SECOND ST.
THIRD ST.
CROSS ST.
MURRAY ST.
FOWLER ST.
LANE
Kentucky River
ROAD
DISTILLERY
UNDERGROUND DRAIN DITCH
BARREL RUN
CLOSED WOOD
F.A. TEL. BOX.
CLOCK STATION
CISTERN
OFFICE
SCALES
BRANDING HO
IRONCLAD
FURNACE
ELEVATOR
CAP. 40,000 BU.
IRON CLAD
STONE 1ST
COOPER SHOP
GRINNELL SPRINKLERS - 78 SPRINKLER HEADS
30' X 135'
BARREL WARE HO.
19' X 105'
SCATTERED PILES OF STAVES AND HEADINGS.
COOPERAGE SHED
HOOP HO.
4" W. PIPE
6" W. PIPE
8" W. PIPE TO SPRINKLER SYSTEM
3" W. PIPE
CORN CRIBS
45' X 130'
FREE WARE HO.
CAP. 2000 BBLS NO RACKS
BONDED WARE HO.
CAP. 2000 BBLS
NO RACKS
BONDED WARE HO. No 9 - A.
CAP. 3700 BBLS - NO RACKS - 172 SPRINKLER HEADS - 45' X 100'
BONDED WARE HO. No 9 - B.
CAP. 2600 BBLS - NO RACKS - 128 SPRINKLER HEADS - 45' X 80'
USED FOR STORAGE ONLY
"HOT HOUSE" BONDED WARE HO. No 9 - I.
CAP. 2500 BBLS - PAT. RACKS - 6 TIERS
144 SPRINKLER HEADS
HEAT. STEAM 130°
BONDED WARE HO. No 9 - C.
CAP. 4000 BBLS - NO RACKS - 180 SPRINKLER HEADS - 80' X 110'
USED FOR STORAGE ONLY.
BONDED WARE HO. No 9 - D.
CAP. 4000 BBLS - NO RACKS - 180 SPRINKLER HEADS - 80' X 110'
USED FOR STORAGE ONLY.
BONDED WARE HO. No 9 - F.
CAP. 7000 BBLS - PAT. RACKS - 9 TO 12 TIERS - 457 SPRINKLER HEADS - 82' X 100'
USED FOR STORAGE ONLY.
FREE WARE HO. E.
CAP. 7000 BBLS - PAT. RACKS - 9 TO 12 TIERS - 457 SPRINKLER HEADS - 82' X 100'
USED FOR STORAGE ONLY
BONDED WARE HO. No 9 - G.
CAPCY 11000 BBLS - PAT. RACKS - 14 TIERS - 634 SPRINKLER HEADS - 85' X 100'
USED FOR STORAGE ONLY
BONDED WARE HO. No 9 - H.
CAPCY 11000 BBLS - PAT. RACKS - 14 TIERS - 634 SPRINKLER HEADS - 85' X 120'
USED FOR STORAGE ONLY.
TIN CLAD SHUTTERS
PLATFORM
HOSE HO.
2½" WD
4" PIPE
SEWER 20" X 20"
WATER TANK
CHOP
BOILER RM
ENGINE ROOM
BRICK
ENGINES
BOILERS
HOT WATER TANK
COLD WATER TANK
WARM TANK
CISTERN PUMP
DENTON WELL & F. PUMP
2½" STEAM
FERMENTING ROOM
IRON CLAD ALL STORIES
DUNIGAN AND NICOL
SAW & PLANING MILLS
SAW MILL
ENG. 80 HP
BOILER RM
STONE 1ST IRON CLAD 2D
PLANING MILL
LUMBER
SHED
OFFICE
Situated at
FRANKFORT, KY
Half Mile S.E. of Post Office
Scale of Feet.
50 40 30 20 10 0 50 100 150

61

KENTUCKY 7TH DISTRICT

The COMMONWEALTH DISTILLERY CO.

STOLL, VANNATTA mfg Co.

formerly Run as STOLL, HAMILTON mfg Co. - STOLL, CLAY mfg CO.

Registered Distillery No 12. - 7th Distr. Fayette Co Ky.

Also Run as CREAM or ANDERSON DISTILLERY, R.P. STOLL,
DURHAM Do.
EDGECLIFF Do.
EDGEWOOD Do.
LYN WOOD Do.
OAK WOOD Do.
OWL CLUB DISTILLING CO.
SMALL GRAIN DISTILLING CO.
BEN. BAER
FECHHEIMER BROS.
W.W. JOHNSON & CO.

PRODUCTION, BOURBON & RYE SOUR MASH WHISKIES

CAPCY 400 BUSHELS PER DAY -
RUN FULL CAPCY ABOUT 8 MONTHS OF YEAR
BRICK & FRAME BUILDING - METAL ROOF - TIRE UNDER DOUBLER -
NIGHT WATCHMAN & CLOCK - NO LIGHTS - NO HEATING - OPEN CARTE IN OFFICE - FUEL COAL - 6 SMALL CHEMICAL FIRE EXTINGUISHERS DISTRIBUTED IN DISTILLERY - 200 14" HOSE

3 Miles N.W. of LEXINGTON KY.

FREE WARE HO. CAPCY 1600 BBLS - PAT RACKS - 7 TIERS -

BONDED WARE HO. CAPCY 13500 BBLS - PAT. RACKS - 7 TO 11 TIERS -

BRICK BUILDING METAL ROOF & CORNICE - TIN CLAD SHUTTERS ALL SIDES - NO HEATING - LIGHTS KEROS. LANTERNS - NIGHT WATCHMAN - BUILDINGS USED FOR STORAGE ONLY

FREE WARE HO. CAPCY 1600 BBLS - PAT RACKS - 7 TIERS - 135' to R.R. Dwg. - TIN CLAD - 8" - ONLY - 80'x100' - PLATFORM

HOUSE - CAPCY 1600 BBLS - PAT. RACKS - 7 TIERS -

WARE - CAPCY 1000 BBLS - PAT. RACKS - 6 TIERS - 6" - 30'x100'

BONDED WARE - CAPCY 3000 BBLS - PAT. RACKS - 10 TIERS - 1'x8" - 1'x2" - 30'x100' - SKYLIGHT - PAINTED - USED FOR STORAGE

JAS. E. PEPPER and CO. "PEPPER DISTILLERY"

JAS. E. PEPPER SOLE OWNER

Formerly Run as HENRY CLAY DISTILLERY

Registered Distillery No 95. - 7th Distr. Fayette Co Ky.

PRODUCTION, BOURBON & RYE WHISKIES - HAND MADE SOUR MASH -

CAPCY 310 BUSHELS PER DAY - RUN FULL CAPCY ABOUT 6 MONTHS OF YEAR -
BRICK & FRAME BUILDING METAL & GRAVEL ROOF - TIRE UNDER DOUBLER -
NIGHT WATCHMAN & CLOCK - 3 STATIONS HALF HOURLY ROUNDS - NO HEATING - NO LIGHTS - FUEL COAL
200 14" HOSE - WATER SUPPLY FROM RIVER -

Pt. LEXINGTON KY.
1½ Miles W. of P.O.

MASH FLOOR 2d - 2 STY'D. - BRICK WITH & FRAMING - ENG ROOM - BOILER - ENG 24 HP - COOL MILL - COOLER - CLAY & LIMESTONE TRACK - FURNACE - BOILER - BRICK FLUE - DISTILLERY - FR. BUILDING IN CLAD

CORN CRIB - CORN CRIB - CORN CRIB - OFF. - SCALES

BOTTLING WORKS - 35'x60'

STORAGE OF BOTTLED GOODS

(OLD FIRM) FREE WARE HO. "B" - CAPCY 4000 BBLS - PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY -

BONDED WARE HO. No 5. "B" - CAPCY 6000 BBLS - PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY - TIN CLAD SHUTTERS

(OLD FIRM) (NEW FIRM)

JAS. E. PEPPER mfg CO.

BONDED WARE HO. No 5. "A" (OLD FIRM) - CAPCY 10000 BBLS - PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY - NO HEATING - TIN CLAD SHUTTERS ALL SIDES - 25' TO EAVES

(NEW FIRM)

BONDED WARE HO. No 5. "C" (OLD FIRM) - CAPCY 8000 BBLS - PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY - IRON CLAD ALL SIDES - 25' TO EAVES - 65'x125'

BONDED WARE HO. No 5. "D" (NEW FIRM) - CAPCY 5000 BBLS - PAT. RACKS - 11 TIERS - USED FOR STORAGE ONLY - IRON CLAD ALL SIDES 25' TO EAVES - 65'x105'

BRANDING ROOM - IRON CLAD - 37'x62' - CISTERN

BONDED WARE HO. No 5. "E" (NEW FIRM) - CAPCY 6300 BBLS - PAT. RACKS - 13 TIERS - USED FOR STORAGE ONLY - IRON CLAD - 29' TO EAVES - 65'x137'

STOCK SHED - 37'x40'

ICE HO.

BARREL HO.

COOPER SHOP - 30'x100'

BONDED WARE HO. No 5. "A" CAPCY 10,000 BBLS - PAT RACKS - 11 TIERS - BRICK METAL ROOF BUILDING - METAL CORNICE TIN CLAD SHUTTERS ALL SIDES -

Do. Do. No 5. "B" CAPCY 6000 BBLS - PAT. RACKS - 11 TIERS - BRICK BUILDING METAL ROOF & CORNICE TIN CLAD SHUTTERS -

Do. Do. No 5. "C" CAPCY 8000 BBLS - PAT. RACKS - 11 TIERS - FRAME BUILDING METAL ROOF - IRON CLAD -

Do. Do. No 5. "D" CAPCY 5000 BBLS - PAT. RACKS - 11 TIERS - FRAME BUILDING METAL ROOF - IR. CLAD

Do. Do. No 5. "E" CAPCY 6300 BBLS - PAT. RACKS - 13 TIERS - FRAME BUILDING METAL ROOF - IR. CLAD -

FREE WARE HO. "B" CAPCY 4000 BBLS - PAT RACKS - 11 TIERS - BRICK BUILDING, METAL ROOF & CORNICE TIN CLAD SHUTTERS -

NIGHT WATCHMAN & CLOCK - NO LIGHTS - NO LIGHTING - WARE HOUSES USED FOR STORAGE ONLY -

OFFICE - OLD DISTILLERY - BARREL RM - COLUMN - STILL - CISTERN - THERMOMETER - WORM TUB - FERMENTING TUBS 20' - MASH TUB - YEAST RM - YEAST TUB - FRAME STAND & COG WHEEL FOR ENTRANCE DOOR - CANARY 37'x60' - DOUBLER - ENG 100 HP - CRUSH FLOOR - CRUSH ROLLS - MILL RM 70' - 2 SQUARE ROLLS - FUEL RM - CUT 75' - BARRELING QUAD - BARRELING FURNACE

SCALE OF FEET. 50 40 30 20 10 0 50 100 150

CATTLE SHEDS

RECRD SUMMITT

SLOP TROUGH

SLOP TROUGH

SLOP TROUGH

SANDERSVILLE LANE

OLD FRANKFORT PIKE

ELKHORN CREEK

VACANT FIELDS

VACANT FIELDS

VACANT

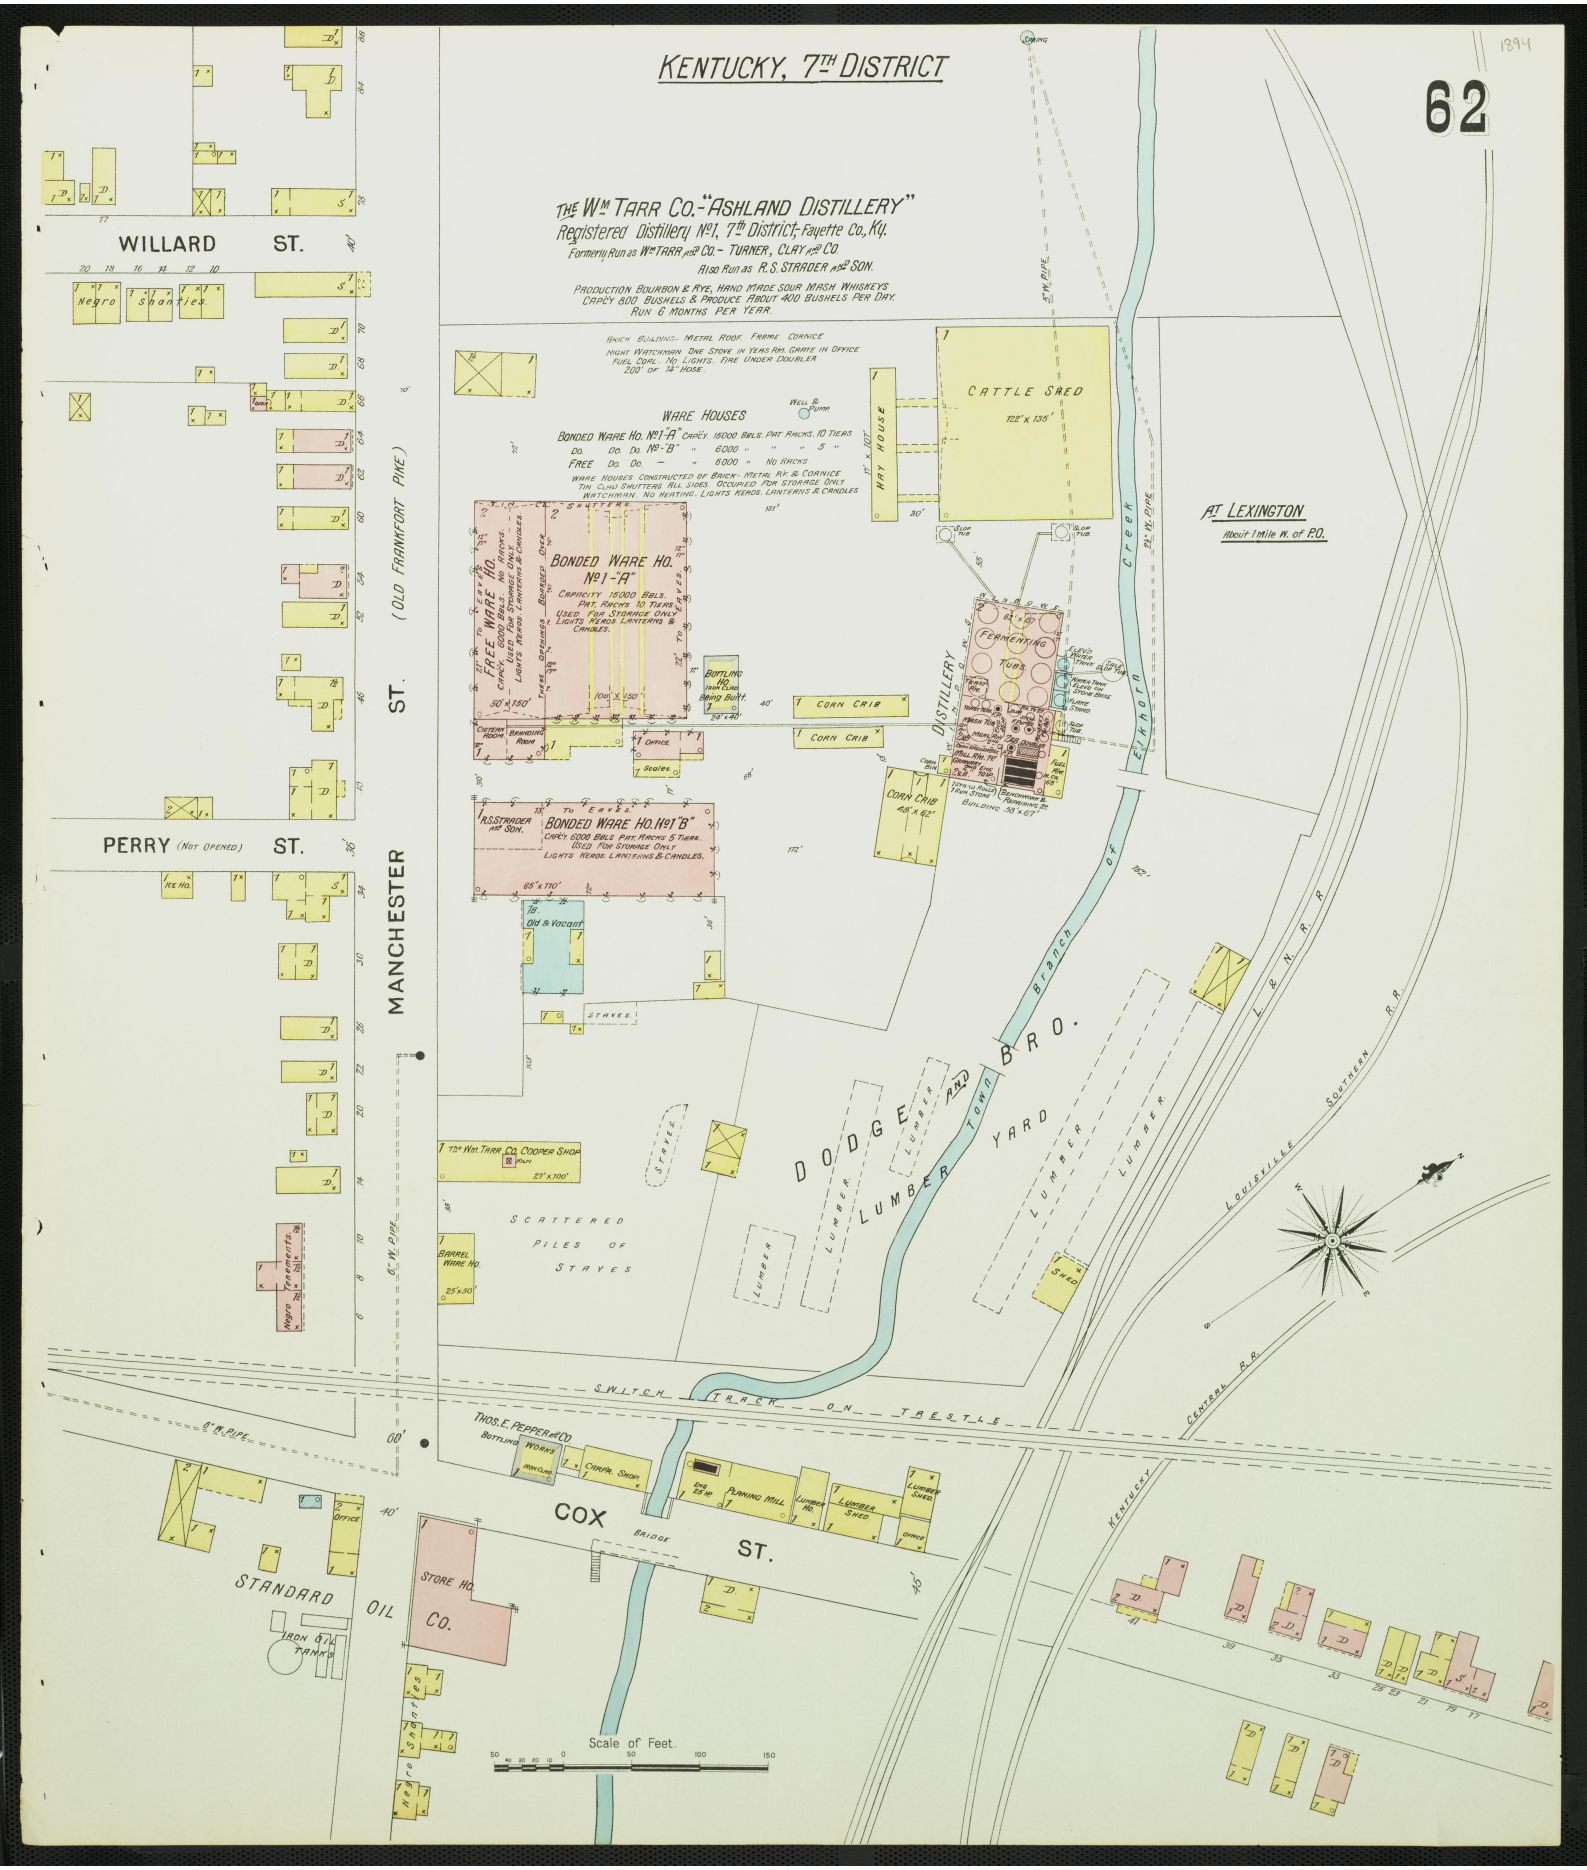

KENTUCKY, 7TH DISTRICT
62
1894
THE WM TARR CO.-"ASHLAND DISTILLERY"
Registered Distillery No 1, 7th District, Fayette Co., Ky.
Formerly Run as WM TARR AND CO. - TURNER, CLAY AND CO.
Also Run as R. S. STRADER AND SON.
PRODUCTION BOURBON & RYE, HAND MADE SOUR MASH WHISKEYS
CAPCY 800 BUSHELS & PRODUCE ABOUT 400 BUSHELS PER DAY.
RUN 6 MONTHS PER YEAR.
BRICK BUILDING- METAL ROOF. FRAME CORNICE
NIGHT WATCHMAN ONE STOVE IN YEAR RM. GRATE IN OFFICE
FUEL COAL. NO LIGHTS. FIRE UNDER DOUBLER
200' OF 1¼" HOSE.
WARE HOUSES
BONDED WARE HO. No 1-"A" CAPCY. 15000 BBLS. PAT RACKS. 10 TIERS
DO. DO. DO. No -"B" " 6000 " " " 5 "
FREE DO. DO. — " 6000 " NO RACKS
WARE HOUSES CONSTRUCTED OF BRICK- METAL RK & CORNICE
TIN CLAD SHUTTERS ALL SIDES. OCCUPIED FOR STORAGE ONLY
WATCHMAN. NO HEATING. LIGHTS KEROS. LANTERNS & CANDLES
WILLARD ST.
Negro Shanties
PERRY (NOT OPENED) ST.
MANCHESTER ST. (OLD FRANKFORT PIKE)
CATTLE SHED
122' x 135'
HAY HOUSE
BONDED WARE HO. No 1-"A"
CAPACITY 15000 BBLS. PAT. RACKS 10 TIERS
USED FOR STORAGE ONLY
LIGHTS KEROS. LANTERNS & CANDLES.
FREE WARE HO.
BOTTLING HO.
CORN CRIB
CORN CRIB
CORN CRIB
48' x 62'
FERMENTING TUBS
DISTILLERY
BONDED WARE HO. No 1 "B"
CAPCY 6000 BBLS PAT. RACKS 5 TIERS.
USED FOR STORAGE ONLY
LIGHTS KEROS. LANTERNS & CANDLES.
R.S. STRADER AND SON.
Old & Vacant
STAVES
Wm. TARR CO. COOPER SHOP
SCATTERED PILES OF STAVES
BARREL WARE HO.
Negro Tenements
DODGE AND BRO.
LUMBER YARD
LUMBER
Town Branch of Elkhorn Creek
AT LEXINGTON
About 1 Mile W. of P.O.
L. & N. R. R.
LOUISVILLE SOUTHERN R.R.
CENTRAL R.R.
KENTUCKY
SWITCH TRACK ON TRESTLE
THOS. E. PEPPER AND CO.
BOTTLING WORKS
CARPR. SHOP
PLANING MILL
LUMBER HO.
LUMBER SHED
COX ST.
BRIDGE
STANDARD OIL CO.
STORE HO.
IRON OIL TANKS
Negro Shanties
Scale of Feet.

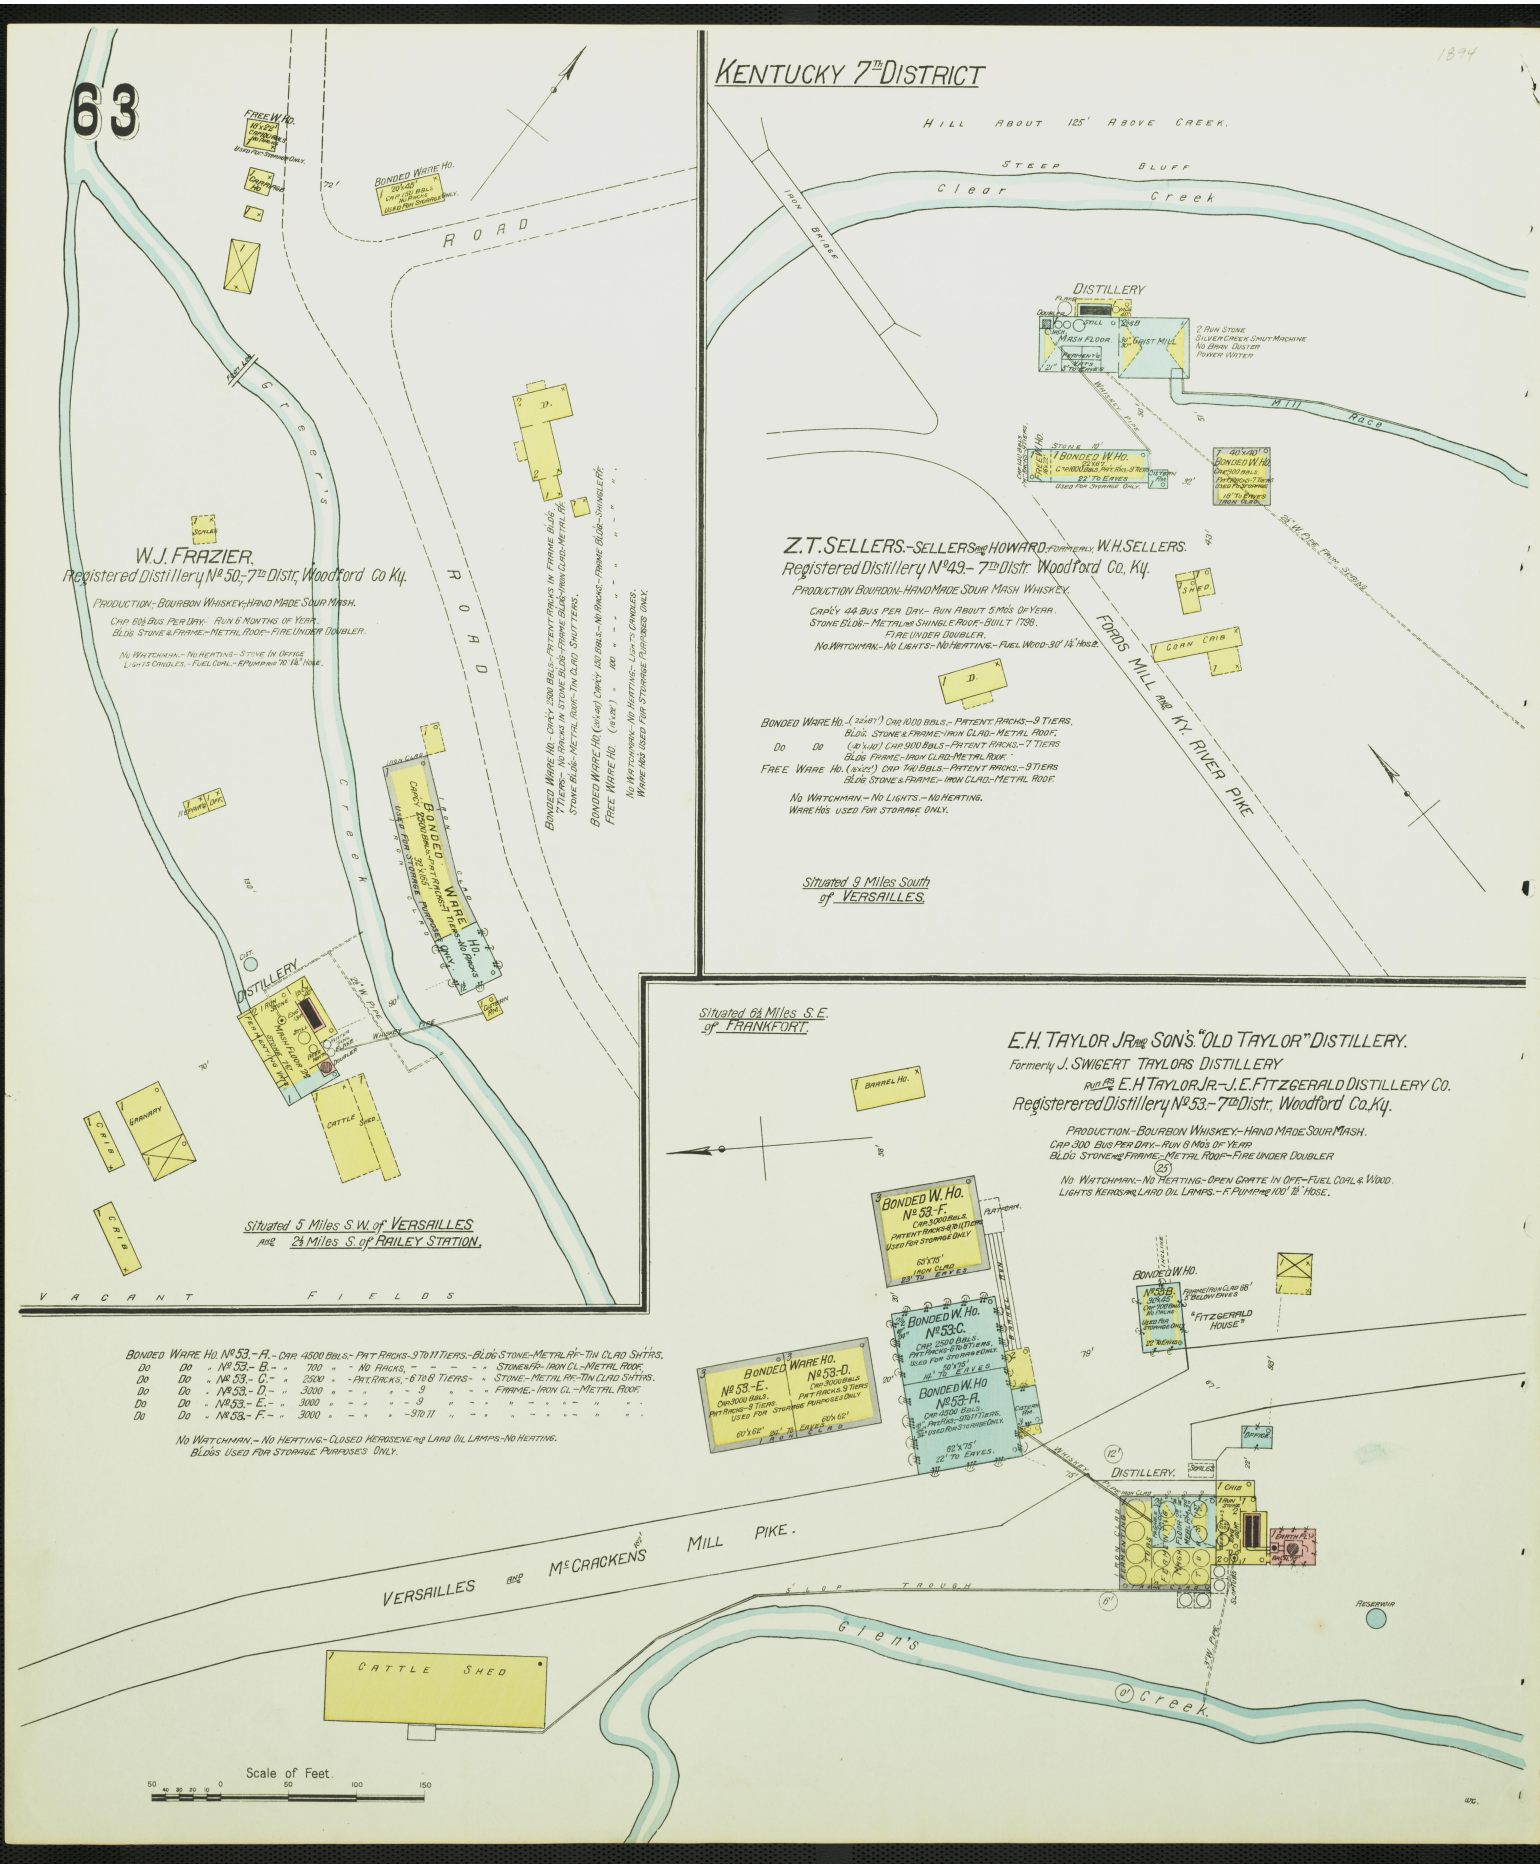

BONDED WARE HO. No 53.- A.- CAP. 4500 BBLS.- PAT RACKS- 9 TO 11 TIERS.- BLDG STONE- METAL R^F- TIN CLAD SH'TRS.
Do Do " No 53.- B.- " 700 " - NO RACKS, - - - - STONE AR- IRON CL.- METAL ROOF.
Do Do " No 53.- C.- " 2500 " - PAT RACKS, - 6 TO 8 TIERS- - STONE.- METAL R^F- TIN CLAD SH'TRS.
Do Do " No 53.- D.- " 3000 " - " " " 9 " " " FRAME.- IRON CL.- METAL ROOF.
Do Do " No 53.- E.- " 3000 " - " " " 9 " " " " " "
Do Do " No 53.- F.- " 3000 " - " " " 9 TO 11 " " " " " "

NO WATCHMAN.- NO HEATING- CLOSED KEROSENE AND LARD OIL LAMPS- NO HEATING.
BLDGS USED FOR STORAGE PURPOSES ONLY.

KENTUCKY, 7TH DISTRICT

AT MT. STERLING
½ Mile S. of Court Ho.

64

JOHN N. THOMAS as H.E. POGUE
Registered Distillery No. 3, 7th Distr.- Mason Co., Ky.

PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 240 BUS. PER DAY. RUN 6 MONTHS PER YEAR.

BRICK & FRAME BUILDING - METAL ROOF.
NIGHT WATCHMAN WHEN RUNNING.
HEAT STOVE IN OFFICE. FUEL COAL.
LIGHTS CLOSED HEROS. LAMPS & CANDLES.
FIRE UNDER DOUBLER

CITY WATER, ALSO PRIVATE SUPPLY.
100' OF ¾" HOSE.

BONDED WARE HO. No. 3 "E" (H.E. POGUE) CAPCY. 2,500 BBLS. NO RACKS.
" " " "H" (JOHN N. THOMAS as H.E. POGUE) CAPCY. 6000 BBLS. PAT. RACKS 12 TIERS.
" " " "J" (JOHN N. THOMAS as H.E. POGUE) CAPCY. 6000 BBLS. PAT. RACKS 12 TIERS.
" " " "I" (H.E. POGUE) CAPCY. 2300 BBLS. NO RACKS.
NIGHT WATCHMAN WHEN RUNNING. STEAM HEAT.
CLOSED HEROS. LIGHTS. FRAME BUILDING. IRON CLAD. METAL ROOF.
USED FOR STORAGE ONLY.

AT MAYSVILLE
½ Mile N.W. of Court Ho.

THE POYNTZ BROS. CO. Formerly POYNTZ BROS.
Registered Distillery No. 6, 7th Distr.- Mason Co., Ky.
Also run as OAKWOOD DISTILLING Co. and J.W. WATSON, 2nd Co.

PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 268 BUS. & PRODUCE ABOUT 240 BUS. PER DAY
RUN 5 MONTHS PER YEAR.

BRICK & FRAME BUILDING - METAL ROOF
NIGHT WATCHMAN WHEN RUNNING.
HEAT STOVES. CLOSED HEROS. LIGHTS. FUEL COAL.
FIRE UNDER DOUBLERS.
CITY WATER & PRIVATE SUPPLY. 100' ¾" HOSE.

POYNTZ BROS. BONDED WARE HO.
CAPCY. 6340 BBLS. PAT. RACKS 12 TIERS.
THE POYNTZ BROS. CO. BONDED W. HO.
CAPCY. 6400 BBLS. PAT. RACKS. 12 TIERS.
NIGHT WATCHMAN WHEN RUNNING.
STEAM HEAT 60° TO 80° FAHR.
CLOSED HEROS. OIL LIGHTS.
FRAME BLDGS. IRON CLAD. METAL ROOF.
USED FOR STORAGE ONLY.

THE J. H. McBRAYER DISTILLING CO.
Registered Distillery No. 17, 7th District- Montgomery Co., Ky.

PRODUCTION BOURBON & RYE HAND MADE SOUR MASH WHISKEY
CAPCY. 677 BUS. & PRODUCTION ABOUT 400 BUS. DAILY
RUN 5 TO 6 MONTHS PER YEAR

FRAME BUILDING. METAL ROOF. - NIGHT WATCHMAN
HEAT STOVE IN YEAST RM. & OFFICE. FUEL COAL.
LIGHTS. HEROS. LANTERNS. 150' OF 1½" HOSE
WATER SUPPLY FROM CREEK & SPRING.

C. & O. R.R. (LEXINGTON DIVISION)

NEWMARKET BONDED WARE HO. No. 17 "A"
CAPCY. 5000 BBLS.
PAT. RACKS 9 TIERS.
USED FOR STORAGE ONLY.

McBRAYER BONDED WARE HO. No. 17 "B"
CAPCY. 12000 BBLS. PAT. RACKS 12 TO 14 TIERS.
USED FOR STORAGE ONLY.
IRON CLAD BUILDING. 93' x 137'

WARE HOUSES
BONDED W. HO. No. 17 "A" CAPCY. 5000 BBLS. PAT. RACKS 9 TIERS.
" " " " "B" " 12000 " " " 12 TO 14 "
FREE " " " " " 1500 " NO RACKS "
BONDED WARE HOS. FRAME BLDGS. METAL RF. - CORR. IRON CLAD.
FREE " " BK. BLDG. METAL RF. & CORNICE. TIN CL. SHUTTS.
USED FOR STORAGE ONLY. NIGHT WATCHMAN.
NO HEATING EXCEPT STOVE IN OFFICE AT FREE WARE HO.
LIGHTS HEROS. OIL LANTERNS.

LIDA C. ROGERS as J.H. ROGERS "LIMESTONE DISTILLERY"
Registered Distillery No. 24, 7th District- Mason Co., Ky.

PRODUCTION BOURBON & RYE SOUR MASH WHISKEY
CAPCY. 143 BUS. PER DAY. RUN 5 MONTHS PER DAY.

FRAME BLDG. METAL ROOF
WATCHMAN WHEN RUNNING
WATCH CLOCK. 3 STATIONS.
HEAT STOVE IN YEAST RM. & OFF.
CLOSED HEROSENE LIGHTS.
FUEL COAL. F.P.R. 50' "A" HOSE
CITY WATER & PRIVATE
SUPPLY FROM SPRING.
STEAM DOUBLER

BONDED WARE HO.
CAPACITY 6000 BBLS
PAT. RACKS 6 TO 10 TIERS.
FR. BLDG. METAL RF. IN CL. ALL SIDES.
WATCHMAN WHEN RUNNING
NO HEATING CLOSED HEROS. LIGHTS.
WARE HO. USED FOR STORAGE ONLY.

AT MAYSVILLE
One Mile N.W. of Court Ho.

MERRITT BROS. Formerly F.P. MERRITT
Registered Distillery No. 22, 7th Distr.- Clark Co., Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY. 21 BUS. PER. DAY. RUN 6 MONTHS PER YEAR.

STONE & FRAME BUILDING. METAL & SHINGLE ROOF
NO WATCHMAN. NO HEATING. FUEL COAL & WOOD
LIGHTS. HEROS. LANTERNS. NO HOSE.
FIRE UNDER DOUBLER

MERRITT BROS. BONDED WARE HO. CAPCY. 800 BBLS. PAT. RACKS 5 TIERS.
F.P. MERRITT " " 400 " " NO RACKS
" " MERRITT BROS. WARE HO. FRAME BLDG. METAL ROOF. IRON CLAD
F.P. MERRITT " " " " SHINGLE " "
NO WATCHMAN. NO HEATING. LIGHTS HEROS. LANTERNS

Situated 3 Miles E. of ELKIN
and 9 Miles S. of WINCHESTER.

Scale of Feet.

THIS PAGE LEFT BLANK FOR SURVEYS OF NEW DISTILLERIES WHICH MAY BE BUILT IN THIS DISTRICT.

KENTUCKY - 8TH DISTRICT

THE ANDERSON COUNTY DISTILLERY

JOHN E. DAY - FORMERLY DAY & HAFF - (WHISKEY IN BOND AS DAY & HAFF)

Registered Distillery No. 134 - 8th Distr. Anderson Co. Ky

PRODUCTION - BOURBON AND RYE, HAND MADE SOUR MASH WHISKEYS

30 BUS. MASHED AND 5 BBLS DISTILLED PER DAY - RUN DAILY FOR SIX MONTHS IN YEAR -

BUILDINGS KEPT IN FAIR REPAIR - NIGHT WATCHMAN - FUEL COAL AND WOOD - LIGHTS KEROSENE LANTERNS - NO HEATING - STOVE IN OFFICE NO'S BEING PUMP - SAID TO HAVE 300 FT HOSE WHEN RUNNING THAT CAN BE ATTACHED TO F. PUMP - WATER FROM SALT RIVER AND RESERVOIR. FED BY SPRING

Situated 5 1/2 Miles N. of LAWRENCEBURG COURT HO.

GRADE LEVEL

NO EXPOSURES ANY SIDE

HOFFMAN & HACKLEY - AS S.O. HACKLEY

Registered Distillery No. 406 - 8th Distr. Anderson Co. Ky

PRODUCTION - BOURBON AND RYE WHISKEYS - FERMENTIVE SOUR MASH PROCESS -

CAPCY - MASHING 100 BUS. AND DISTILLING 10 BBLS. PER DAY - RUN DAILY FOR SIX MONTHS IN THE YEAR -

ALL BUILDINGS KEPT IN GOOD REPAIR -

NO WATCHMAN - POWER STEAM - FUEL COAL AND WOOD - HEAT STOVE IN OFFICE ONLY - LIGHTS KEROSENE LANTERNS - WATER SUPPLY FROM WELL AND CREEK - 50' 1" RUBBER HOSE THAT CAN BE ATTACHED TO F. PUMP - NO OTHER FIRE APPLIANCES -

BONDED WARE HO. "D" - CAPCY 3024 BBLS - PAT. RACKS - 84 TIERS -

BONDED WARE HO. C. CAPCY 3240 BBLS PAT RACKS - 90 TIERS

FRAME BLDGS - IRONCLAD ALL SIDES - NO HEATING

CONSTRUCTION OF BOTH WARE HOUSES - IRON CLAD ALL SIDES 6M 4'10" OUT-STUDDING - FLOORS SHEATHING INSIDE - IRONCLAD DOORS AND SHUTS TO ALL OPENINGS

J. S. SEARCY AND CO'S "BOILING SPRING" DISTILLERY

Registered Distillery No. 120 - 8th Distr. - Anderson Co. Ky

PRODUCTION - BOURBON WHISKEY. FERMENTIVE SOUR MASH PROCESS -

CAPCY MASHING - 75 BUS - AND DISTILLING 7½ BBLS - PER DAY - RUN DAILY FOR 8 MONTHS IN THE YEAR -

ALL BUILDINGS KEPT IN FAIR CONDITION OF REPAIR -

NO WATCHMAN - POWER STEAM - FUEL COAL AND WOOD - NO HEATING - STOVE IN OFFICE - LIGHTS KEROSENE LANTERNS - WATER SUPPLY FROM SPRING - NO FIRE APPLIANCES

WARE HOUSES

BONDED WARE HO. No. 1 - CAPCY 1800 BBLS - NO RACKS -
Do. Do. No. 2 " 700 " PAT. RACKS - 20 TIERS -
Do. Do. No. 3 " 750 " NO RACKS -
Do. Do. No. 4 " 3264 " PAT. RACKS - 68 TIERS -
FRAME BLDGS - NOT HEATED -

Situated 5 Miles N.W. of LAWRENCEBURG COURT HO.

J. W. STEVENS & CO. DISTILLERS

J. S. SEARCY OWNER

Registered Distillery No. 416 - 8th Distr. Anderson Co. Ky

UNDER THE STYLE OF MOSELY, STEVENS & BROWN AS LAST RUN - NOT IN OPERATION SINCE AUTUMN OF '89

PRODUCT - BOURBON WHISKEY - FERMENTIVE SOUR MASH PROCESS - CAPCY - MASHING 50 BUS - DISTILLING 10 BBLS PER DAY - RUN DAILY FOR 6 MOS - IN THE YEAR - DISTILLERY IN GOOD REPAIR - NO WATCHMAN - FUEL COAL AND WOOD - NO HEATING - LIGHTS KEROSENE LANTERNS - NO FIRE APPLIANCES - WATER SUPPLY FROM SPRING -

WARE HOUSES OLD AND DILAPIDATED

Situated One Mile S.W. of CAMDEN (ORR) 11 Miles N.W. of LAWRENCEBURG.

AT CAMDEN (ORR) 11 Miles N.W. of LAWRENCEBURG COURT HO. LAWRENCEBURG NEAREST R.R. CENTRE

NO EXPOSURE ANY SIDE

CAMDEN AND LAWRENCEBURG PIKE

1/4 MILE TO CAMDEN.

BONDED W. HO. No. 1 - (C) CAP. 800 BBLS - NO RACKS -
Do. Do. No. 2 (D) " 750 " " "
Do. Do. No. 3 (E) " 785 " " "
FREE W. HO. A " 300 " " "
Do. Do. B " 720 " " "

VACANT

HAMMOND CREEK

HAMMOND ROAD

SALT RIVER

VACANT HILLSIDE ROAD

FORD

Scale of Feet. 50 40 30 20 10 0 50 100 150

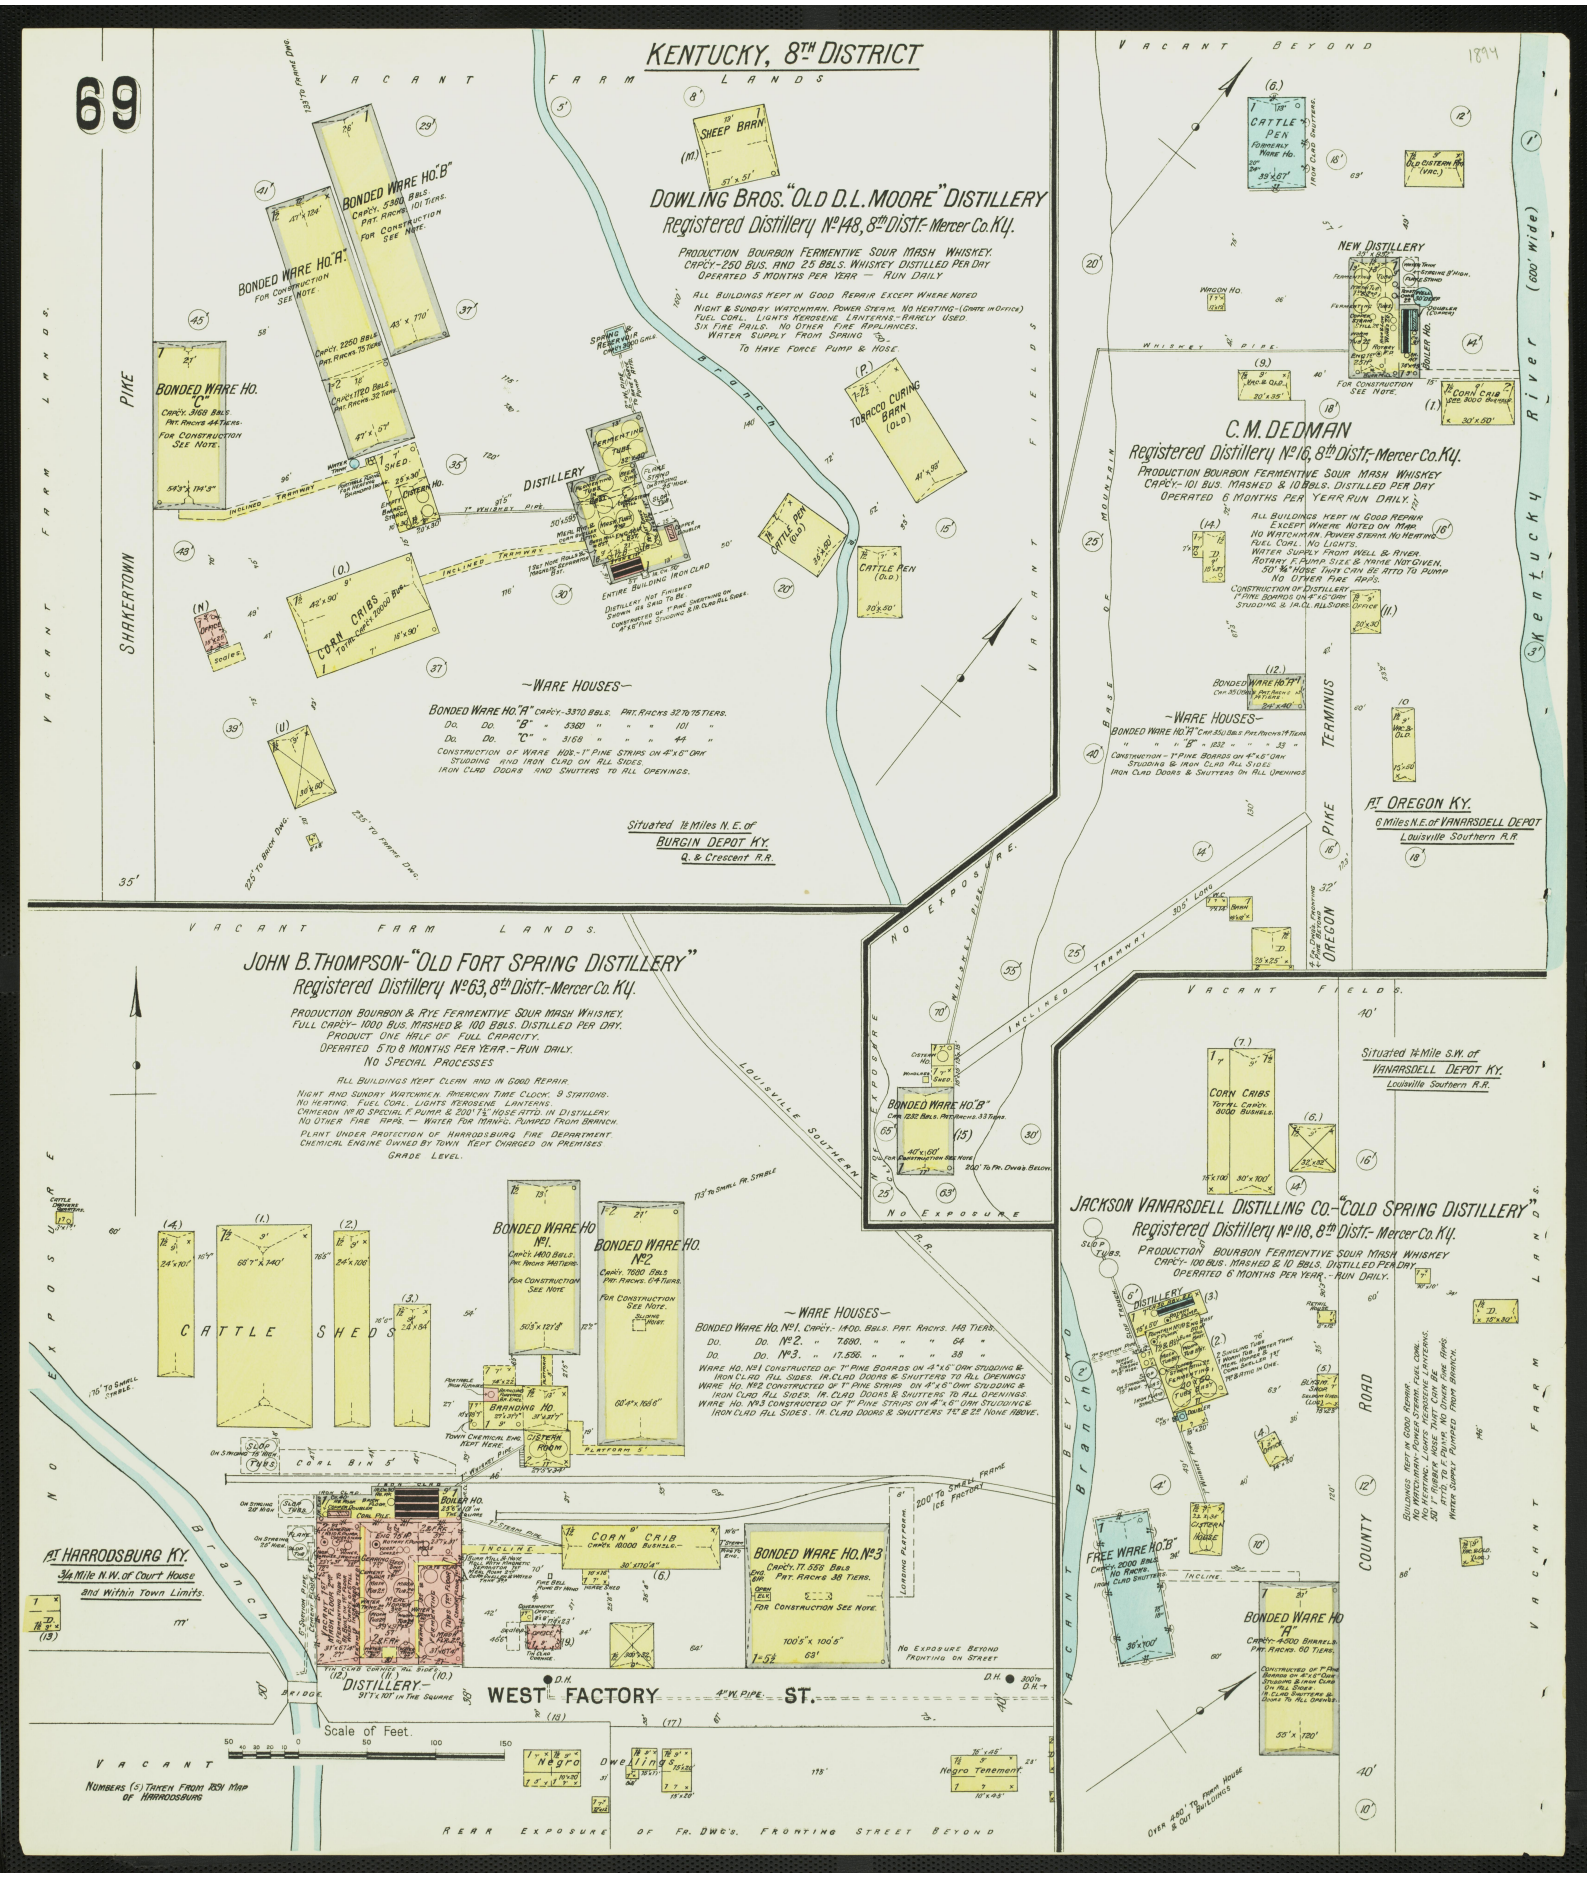
69
KENTUCKY, 8TH DISTRICT
DOWLING BROS. "OLD D.L. MOORE" DISTILLERY
Registered Distillery No 148, 8th Distr.- Mercer Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY.
CAPCY- 250 BUS. AND 25 BBLS. WHISKEY DISTILLED PER DAY
OPERATED 3 MONTHS PER YEAR — RUN DAILY
ALL BUILDINGS KEPT IN GOOD REPAIR EXCEPT WHERE NOTED
NIGHT & SUNDRY WATCHMAN. POWER STEAM. NO HEATING-(GOOSE IN OFFICE)
FUEL COAL. LIGHTS KEROSENE LANTERNS-RARELY USED.
SIX FIRE PAILS. NO OTHER FIRE APPLIANCES.
WATER SUPPLY FROM SPRING
TO HAVE FORCE PUMP & HOSE.
BONDED WARE HO. "A"
BONDED WARE HO. "B"
BONDED WARE HO. "C"
SHEEP BARN
TOBACCO CURING BARN (OLD)
CATTLE PEN (OLD)
DISTILLERY
CORN CRIBS
~WARE HOUSES~
BONDED WARE HO. "A" CAPCY.- 3370 BBLS. PAT. RACKS 32 TO 75 TIERS.
Do. Do. "B" " 5360 " " " 101 "
Do. Do. "C" " 3168 " " " 44 "
CONSTRUCTION OF WARE HOS.- 1" PINE STRIPS ON 4"x6" OAK STUDDING AND IRON CLAD ON ALL SIDES.
IRON CLAD DOORS AND SHUTTERS TO ALL OPENINGS.
Situated 1½ Miles N.E. of BURGIN DEPOT KY.
Q. & Crescent R.R.
C.M. DEDMAN
Registered Distillery No 16, 8th Distr.- Mercer Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY
CAPCY- 101 BUS. MASHED & 10 BBLS. DISTILLED PER DAY
OPERATED 6 MONTHS PER YEAR RUN DAILY.
ALL BUILDINGS KEPT IN GOOD REPAIR EXCEPT AS NOTED ON MAP
NO WATCHMAN. POWER STEAM. NO HEATING
FUEL COAL. NO LIGHTS.
WATER SUPPLY FROM WELL & RIVER.
ROTARY F. PUMP. SIZE & NAME NOT GIVEN.
50' ½" HOSE THAT CAN BE ATTD TO PUMP
NO OTHER FIRE APPS.
CONSTRUCTION OF DISTILLERY 1" PINE BOARDS ON 4"x6" OAK STUDDING & IRON CLAD ALL SIDES.
NEW DISTILLERY
CATTLE PEN
CORN CRIB
OLD CISTERN (VAC.)
~WARE HOUSES~
BONDED WARE HO "A" CAP. 350 BBLS. PAT. RACKS 14 TIERS.
" " "B" " 1232 " " " 33 "
CONSTRUCTION- 1" PINE BOARDS ON 4"x6" OAK STUDDING & IRON CLAD ALL SIDES
IRON CLAD DOORS & SHUTTERS ON ALL OPENINGS
AT OREGON KY.
6 Miles N.E. of VANARSDELL DEPOT
Louisville Southern R.R.
JOHN B. THOMPSON- "OLD FORT SPRING DISTILLERY"
Registered Distillery No 63, 8th Distr.- Mercer Co. Ky.
PRODUCTION BOURBON & RYE FERMENTIVE SOUR MASH WHISKEY.
FULL CAPCY- 1000 BUS. MASHED & 100 BBLS. DISTILLED PER DAY.
PRODUCT ONE HALF OF FULL CAPACITY.
OPERATED 5 TO 8 MONTHS PER YEAR.- RUN DAILY.
NO SPECIAL PROCESSES
ALL BUILDINGS KEPT CLEAN AND IN GOOD REPAIR.
NIGHT AND SUNDRY WATCHMEN. AMERICAN TIME CLOCK. 9 STATIONS.
NO HEATING. FUEL COAL. LIGHTS KEROSENE LANTERNS.
CAMERON NO 10 SPECIAL F. PUMP & 200' 1½" HOSE ATTD. IN DISTILLERY.
NO OTHER FIRE APPS. — WATER FOR MANFG. PUMPED FROM BRANCH.
PLANT UNDER PROTECTION OF HARRODSBURG FIRE DEPARTMENT.
CHEMICAL ENGINE OWNED BY TOWN KEPT CHARGED ON PREMISES
GRADE LEVEL.
CATTLE SHEDS
BONDED WARE HO. No 1.
BONDED WARE HO. No 2.
BRANDING HO.
CISTERN ROOM
PLATFORM SCALES
~WARE HOUSES~
BONDED WARE HO. No 1. CAPCY.- 1400 BBLS. PAT. RACKS. 148 TIERS.
Do. Do. No 2. " 7680 " " " 64 "
Do. Do. No 3. " 17,556 " " " 38 "
WARE HO. NO 1 CONSTRUCTED OF 1" PINE BOARDS ON 4"x8" OAK STUDDING & IRON CLAD ALL SIDES. IR. CLAD DOORS & SHUTTERS TO ALL OPENINGS
WARE HO. NO 2 CONSTRUCTED OF 1" PINE STRIPS ON 4"x6" OAK STUDDING & IRON CLAD ALL SIDES. IR. CLAD DOORS & SHUTTERS TO ALL OPENINGS.
WARE HO. NO 3 CONSTRUCTED OF 1" PINE STRIPS ON 4"x6" OAK STUDDING & IRON CLAD ALL SIDES. IR. CLAD DOORS & SHUTTERS 1'6" & 2'6" NONE ABOVE.
BOILER HO.
CORN CRIB
BONDED WARE HO. No 3
DISTILLERY
WEST FACTORY
4" W. PIPE
ST.
AT HARRODSBURG KY.
¾ Mile N.W. of Court House
and Within Town Limits.
Scale of Feet.
Negro Dwelling
Negro Tenement
NUMBERS (5) TAKEN FROM 1894 MAP OF HARRODSBURG
REAR EXPOSURE OF FR. DWG'S. FRONTING STREET BEYOND
JACKSON VANARSDELL DISTILLING CO.- "COLD SPRING DISTILLERY"
Registered Distillery No 118, 8th Distr.- Mercer Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY
CAPCY- 100 BUS. MASHED & 10 BBLS. DISTILLED PER DAY
OPERATED 6 MONTHS PER YEAR.- RUN DAILY.
Situated ¼ Mile S.W. of VANARSDELL DEPOT KY.
Louisville Southern R.R.
CORN CRIBS
BONDED WARE HO. "B"
BONDED WARE HO "A"
FREE WARE HO. "B"
DISTILLERY
CISTERN HOUSE
BUILDINGS KEPT IN GOOD REPAIR
NO WATCHMAN. POWER STEAM. FUEL COAL
NO LIGHTS. WATER SUPPLY FROM SPRING
50' 1" RUBBER HOSE THAT CAN BE ATTD. TO F. PUMP. NO OTHER FIRE APPS
WATER SUPPLY FURNISHED FROM BRANCH
VACANT FARM LANDS
VACANT BEYOND
VACANT FIELDS
BASE OF MOUNTAIN
TERMINUS
PIKE
OREGON
ROAD
COUNTY
SHAKERTOWN
BRANCH
Kentucky River (600' Wide)
LOUISVILLE SOUTHERN R.R.
INCLINED TRAMWAY
NO EXPOSURE
1894

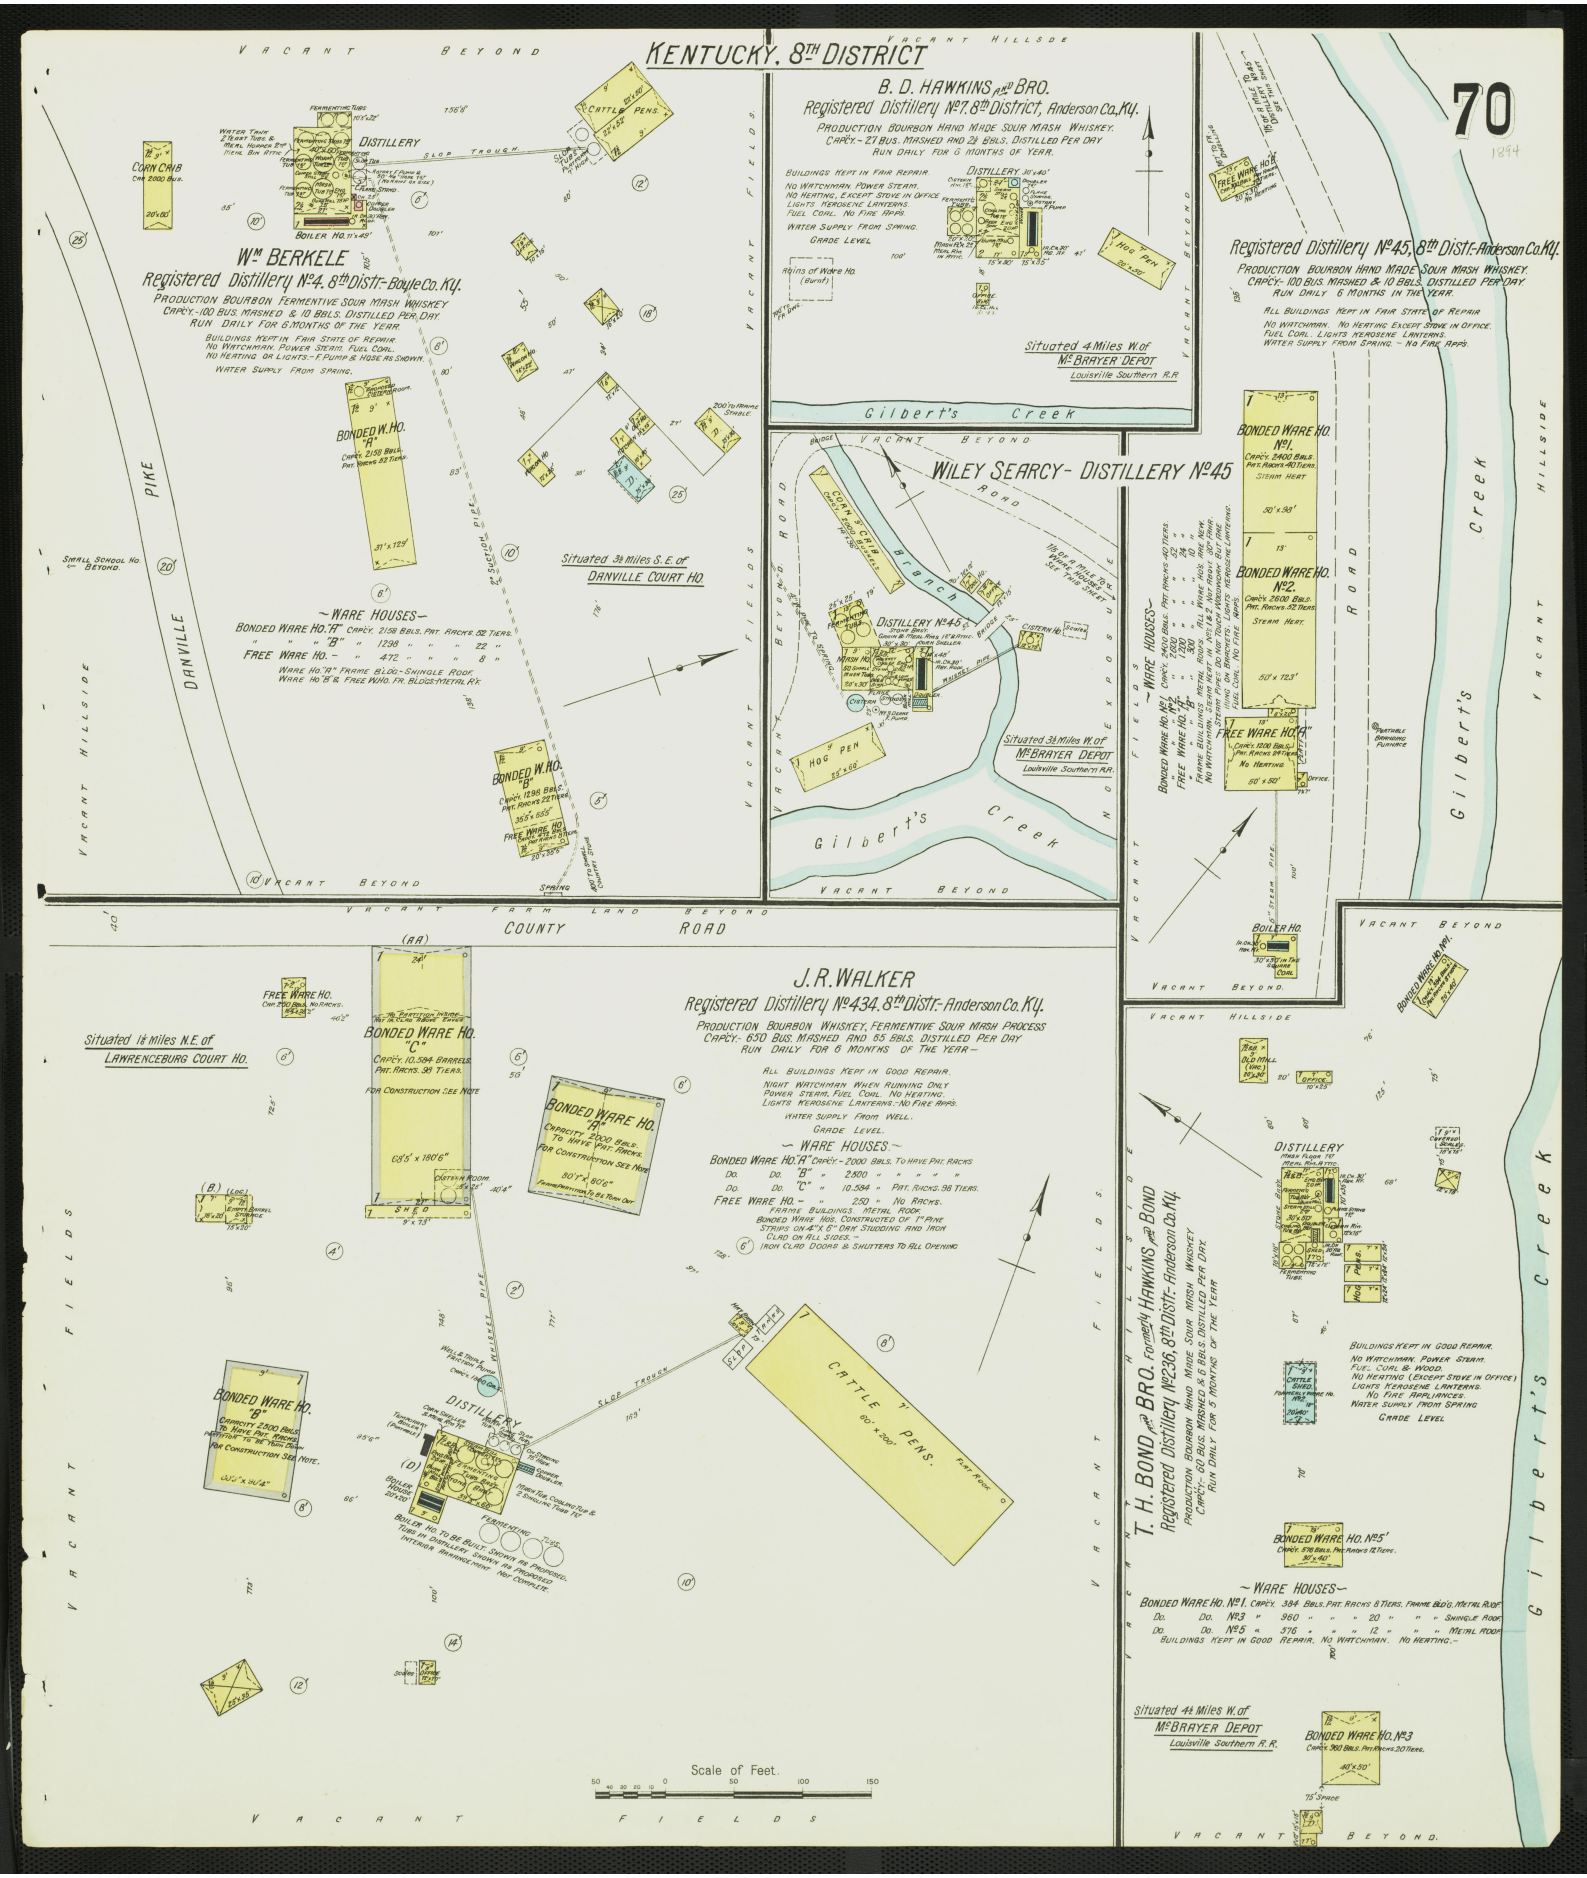
KENTUCKY. 8TH DISTRICT
70
1894
VACANT BEYOND
VACANT HILLSIDE
VACANT FIELDS
PIKE
DANVILLE
SMALL SCHOOL HO. BEYOND.
CORN CRIB
Cap. 2000 Bus.
DISTILLERY
SLOP TROUGH
CATTLE PENS
BOILER HO.
Wm. BERKELE
Registered Distillery No. 4. 8th Distr.- Boyle Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY
CAPCY.-100 BUS. MASHED & 10 BBLS. DISTILLED PER DAY.
RUN DAILY FOR 6 MONTHS OF THE YEAR.
BUILDINGS KEPT IN FAIR STATE OF REPAIR.
NO WATCHMAN. POWER STEAM. FUEL COAL.
NO HEATING, OR LIGHTS.- 1 PUMP & HOSE AS SHOWN.
WATER SUPPLY FROM SPRING.
BONDED W. HO. "A"
Capcy. 2158 Bbls. Pat. Racks 82 Tiers.
31' x 129'
Situated 3½ Miles S. E. of DANVILLE COURT HO.
~WARE HOUSES~
BONDED WARE HO. "A" Capcy. 2158 Bbls. Pat. Racks 82 Tiers.
" " "B" " 1298 " " " 22 "
FREE WARE HO. - " 472 " " " 8 "
Ware Ho. "A" Frame Bldg.- Shingle Roof.
Ware Ho. "B" & Free Ware Ho. Fr. Bldgs.- Metal R.R.
BONDED W. HO. "B"
Capcy. 1298 Bbls. Pat. Racks 22 Tiers.
35'5" x 65'5"
FREE WARE HO.
Capcy. 472 Bbls. Pat. Racks 8 Tiers.
20' x 39'6"
SPRING
SUCTION PIPE
COUNTY ROAD
VACANT FARM LAND BEYOND
B. D. HAWKINS & BRO.
Registered Distillery No. 7. 8th District, Anderson Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY.
CAPCY.- 21 BUS. MASHED AND 2½ BBLS. DISTILLED PER DAY
RUN DAILY FOR 6 MONTHS OF YEAR.
BUILDINGS KEPT IN FAIR REPAIR.
NO WATCHMAN. POWER STEAM.
NO HEATING, EXCEPT STOVE IN OFFICE
LIGHTS KEROSENE LANTERNS.
FUEL COAL. NO FIRE RAPS.
WATER SUPPLY FROM SPRING.
GRADE LEVEL.
DISTILLERY 30'x40'
HOG PEN 12'x30'
Ruins of Ware Ho. (Burnt)
Situated 4 Miles W. of Mc BRAYER DEPOT
Louisville Southern R.R.
Gilbert's Creek
WILEY SEARCY- DISTILLERY No. 45
BRIDGE
ROAD
Branch
DISTILLERY No. 45
Steam Boiler
Mash Ho.
Cistern Ho.
HOG PEN
Situated 3¼ Miles W. of Mc BRAYER DEPOT
Louisville Southern R.R.
Registered Distillery No. 45, 8th Distr.- Anderson Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY.
CAPCY.- 100 BUS. MASHED & 10 BBLS. DISTILLED PER DAY
RUN DAILY 6 MONTHS IN THE YEAR.
ALL BUILDINGS KEPT IN FAIR STATE OF REPAIR
NO WATCHMAN. NO HEATING EXCEPT STOVE IN OFFICE.
FUEL COAL. LIGHTS KEROSENE LANTERNS.
WATER SUPPLY FROM SPRING. - NO FIRE RAPS.
FREE WARE HO. "A"
BONDED WARE HO. No. 1.
Capcy. 2400 Bbls. Pat. Racks 40 Tiers.
Steam Heat.
50' x 59'
BONDED WARE HO. No. 2.
Capcy. 2520 Bbls. Pat. Racks 42 Tiers.
Steam Heat.
50' x 123'
~WARE HOUSES~
BONDED WARE HO. No. 1. Capcy. 2400 Bbls. Pat. Racks 40 Tiers.
BONDED WARE HO. No. 2. " " 2520 " " " 42 "
FREE WARE HO. "A" " " 1200 " " " 24 "
Frame Buildings Metal Roof. No Watchman. Steam kept in No's 1 & 2. Not Kept Over Night.
No Watchman. Steam kept in No's 1 & 2. Not Kept Over Night.
Lining on Brackets. Lights Kerosene Lanterns.
Fuel Coal. No Fire Raps.
FREE WARE HO. "A"
Capcy. 1200 Bbls. Pat. Racks 24 Tiers.
No Heating
50' x 80'
Office.
BOILER HO.
30' x 37' in Two Stories
Coal
Gilbert's Creek
VACANT BEYOND
J. R. WALKER
Registered Distillery No. 434. 8th Distr.- Anderson Co. Ky.
PRODUCTION BOURBON WHISKEY, FERMENTIVE SOUR MASH PROCESS
CAPCY.- 650 BUS. MASHED AND 65 BBLS. DISTILLED PER DAY
RUN DAILY FOR 6 MONTHS OF THE YEAR -
ALL BUILDINGS KEPT IN GOOD REPAIR.
NIGHT WATCHMAN WHEN RUNNING ONLY
POWER STEAM, FUEL COAL. NO HEATING.
LIGHTS KEROSENE LANTERNS:- NO FIRE RAPS.
WATER SUPPLY FROM WELL.
GRADE LEVEL.
~WARE HOUSES.~
BONDED WARE HO. "A" Capcy.- 2000 Bbls. To have Pat. Racks
Do. Do. "B" " 2800 " " " "
Do. Do. "C" " 10,584 " Pat. Racks. 98 Tiers.
FREE WARE HO. - " 250 " No Racks.
Frame Buildings. Metal Roof.
Bonded Ware Hos. Constructed of 1" Pine Strips on 4"x 6" Oak Studding and Iron Clad on All Sides.
Iron Clad Doors & Shutters To All Opening
Situated 1⅛ Miles N.E. of LAWRENCEBURG COURT HO.
FREE WARE HO.
BONDED WARE HO. "C"
Capcy. 10,584 Barrels. Pat. Racks. 98 Tiers.
For Construction See Note
68'5" x 180'6"
SHED
BONDED WARE HO. "A"
Capacity 2000 Bbls. To Have Pat. Racks
For Construction See Note
80'7" x 80'6"
BONDED WARE HO. "B"
Capacity 2800 Bbls. To Have Pat. Racks
For Construction See Note
DISTILLERY
SLOP TROUGH
CATTLE PENS
BOILER HOUSE
Boiler Ho. To be Built. Shown as Proposed. Tubs in Distillery Shown as Proposed. Interior Arrangement Not Complete.
T. H. BOND & BRO. formerly HAWKINS & BOND
Registered Distillery No. 236. 8th Distr.- Anderson Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY.- 60 BUS. MASHED & 6 BBLS. DISTILLED PER DAY.
RUN DAILY FOR 5 MONTHS OF THE YEAR
DISTILLERY
BUILDINGS KEPT IN GOOD REPAIR.
NO WATCHMAN. POWER STEAM.
FUEL COAL & WOOD.
NO HEATING (EXCEPT STOVE IN OFFICE)
LIGHTS KEROSENE LANTERNS.
NO FIRE RAPS, INSURANCE.
WATER SUPPLY FROM SPRING
GRADE LEVEL
BONDED WARE HO. No. 5
Capcy. 576 Bbls. Pat. Racks 12 Tiers.
~WARE HOUSES~
BONDED WARE HO. No. 1. Capcy. 384 Bbls. Pat. Racks 8 Tiers. Frame Bldg. Metal Roof.
Do. Do. No. 3 " 960 " " " 20 " " Shingle Roof.
Do. Do. No. 5 " 576 " " " 12 " " Metal Roof.
Buildings Kept in Good Repair. No Watchman. No Heating.
Situated 4¼ Miles W. of Mc BRAYER DEPOT
Louisville Southern R.R.
BONDED WARE HO. No. 3
Capcy. 360 Bbls. Pat. Racks. 20 Tiers.
40' x 50'
15' Space
Gilbert's Creek
Scale of Feet.
50 40 30 20 10 0 50 100 150
VACANT FIELDS
VACANT BEYOND

71

1894

J. M. WATERFILL mfg Co.

Registered Distillery No2. - 8th Distr. Anderson Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
100 BUS. MASHED AND 10 BBLS DISTILLED PER DAY -
RUN DAILY - OPERATED 6 MONTHS OF YEAR -
NO WATCHMAN - NO HEATING EXCEPT STOVE IN OFFICE
LIGHTS KEROSENE LANTERNS - FUEL COAL - POWER STEAM -
NO FIRE APPLIANCES -
WATER SUPPLY FROM WELL -
ALL BLDGS KEPT CLEAN AND IN GOOD REPAIR -

KENTUCKY - 8th DISTRICT

BOND'S MILL PIKE

DISTILLERY

BONDED WARE No1. CAPCY 2112 BBLS - PAT. RACKS - 84 TIERS
BONDED WARE No2. CAPCY 1120 BBLS - PAT. RACKS - 80 TIERS
HO'S No3. CAPCY 1760 BBLS - PAT. RACKS - 22 TIERS

HOG PEN 30' x 75'
HOG PEN 30' x 75'

B r a n c h

Situated 1 Mile W. of Mc BRAYER DEPOT
LOUISVILLE SOUTHERN R. R.

NO EXPOSURE ANY SIDE - GRADE LEVEL -

BONDED WARE No No1. CAPCY 2112 BBLS - PAT. RACKS - 84 TIERS -
Do. Do. No2. " 1120 " " " 80 "
Do. Do. No3. " 1760 " " " 22 "
FRAME BLDGS - METAL ROOFS - NO HEATING -

VACANT BEYOND

CATTLE SHED 58' x 226'

HAY BARN 26' x 40'

WATER TANK

475'

SLOP TUBS

EDWARD MURPHY mfg Co's "BELLE of ANDERSON Co." DISTILLERY

Registered Distillery No400 - 8th Distr. Anderson Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY -
200 BUS. MASHED AND 20 BBLS DISTILLED PER DAY
RUN DAILY - IN OPERATION 6 MONTHS OF YEAR
NIGHT WATCHMAN WHEN RUNNING -
FUEL COAL - POWER, STEAM - LIGHTS KEROSENE LANTERNS -
ONE STOVE IN OFFICE - NO OTHER HEATING -
50' 1" RUBBER HOSE THAT CAN BE ATTACHED TO FORCE PUMP IN BOILER HOUSE
NO OTHER FIRE APPLIANCES -
WATER SUPPLY FROM RIVER -
ALL BUILDS KEPT IN GOOD REPAIR

FREE WARE HO. CAPCY 1300 BBLS - PAT. RACKS - 8 TIERS - 20' x 46'5"

BONDED WARE HO. No1. CAPCY 4240 BBLS - PAT. RACKS - 106 TIERS - 46'5" x 286'5"

SLOP TROUGH

AT CLIFTON KY.
3 Miles N.E. of LAWRENCEBURG COURT HO.

GRADE LEVEL

STEAM PIPE

DISTILLERY

INCLINE

CORN CRIB CAPCY 300 BBLS

BONDED WARE HO. No1. CAPCY 4240 BBLS - PAT. RACKS - 106 TIERS -
Do. Do. No2. " 3940 " " " 42 "
FRAME BUILDINGS - METAL ROOFS -
NO HEATING -

BONDED WARE HO. No2.
CAPCY 2300 BBLS -
PAT. RACKS - 92 TIERS -
46'5" x 100'

PROPOSED EXTENTION OF WARE HO.

46'5" x 100'

BOND mfg LILLARD

Registered Distillery No279 - 8th Distr. Anderson Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY -
300 BUS. MASHED AND 30 BBLS DISTILLED PER DAY -
RUN DAILY - OPERATED 6 MONTHS OF YEAR -
NO WATCHMAN - FUEL COAL - POWER STEAM - NO FIRE APPLIANCES
ONE STOVE IN OFFICE AND ONE IN REAR RM OF DISTILLERY -
NO OTHER HEATING -
LIGHTS KEROSENE LANTERNS - WATER SUPPLY FROM RUN -
ALL BUILDINGS KEPT CLEAN AND IN GOOD REPAIR -

CONSTRUCTION OF DISTILLERY 4"x6" OAK STUDS - IRON CLAD ALL SIDES -
1" PINE STRIPS INSIDE - STONE BASEMENT -

BONDED WARE HO. No3.
CAPCY 5,886 BBLS -
PAT. RACKS - 105 TIERS -
IRON CLAD BLDG.
(FOR CONSTRUCTION SEE NOTE)
464'x188'

FREE WARE HO. No1. CAPCY 1508 BBLS - PAT. RACKS - 36 TIERS -
BONDED WARE HO. No2. " 2083 " " " 86 "
Do. Do. No3. " 5886 " " " 189 "
Do. Do. No4. " 3240 " " " 60 "

CONSTRUCTION OF WARE HOS. No1. 2 & 3 - 4"x6" OAK STUDS -
IRON CLAD ALL SIDES - 1" PINE STRIPS INSIDE -
WARE HOS. No1 & 2 HAVE STONE BASEMENT -

SMALL FURNACE FOR HEATING BRANDING IRONS

Situated 1½ Miles S.E. of
LAWRENCEBURG COURT HO.

NO EXPOSURE ANY SIDE

BOOKWALTER RUN

BAILEYS

1" WHISKEY PIPE

DISTILLERY
(FOR CONSTRUCTION SEE NOTE)

BONDED WARE HO. No4.
CAPCY 3240 BBLS -
PAT. RACKS - 60 TIERS -
52' x 151'

BONDED WARE HO. No2.
CAPCY 2083 BBLS -
PAT. RACKS - 86 TIERS -
33'x90' 26'x90'

FREE WARE HO. No1.
CAPCY 1508 BBLS -
PAT. RACKS - 36 TIERS -
(USUALLY FREE)
33'x60' 26'x60'

(FOR CONSTRUCTION SEE NOTE)

HAY BARN 30'x30'
SHED 30'x18'

NO EXPOSURE

Kentucky River

Scale of Feet.
50 40 30 20 10 0 50 100 150

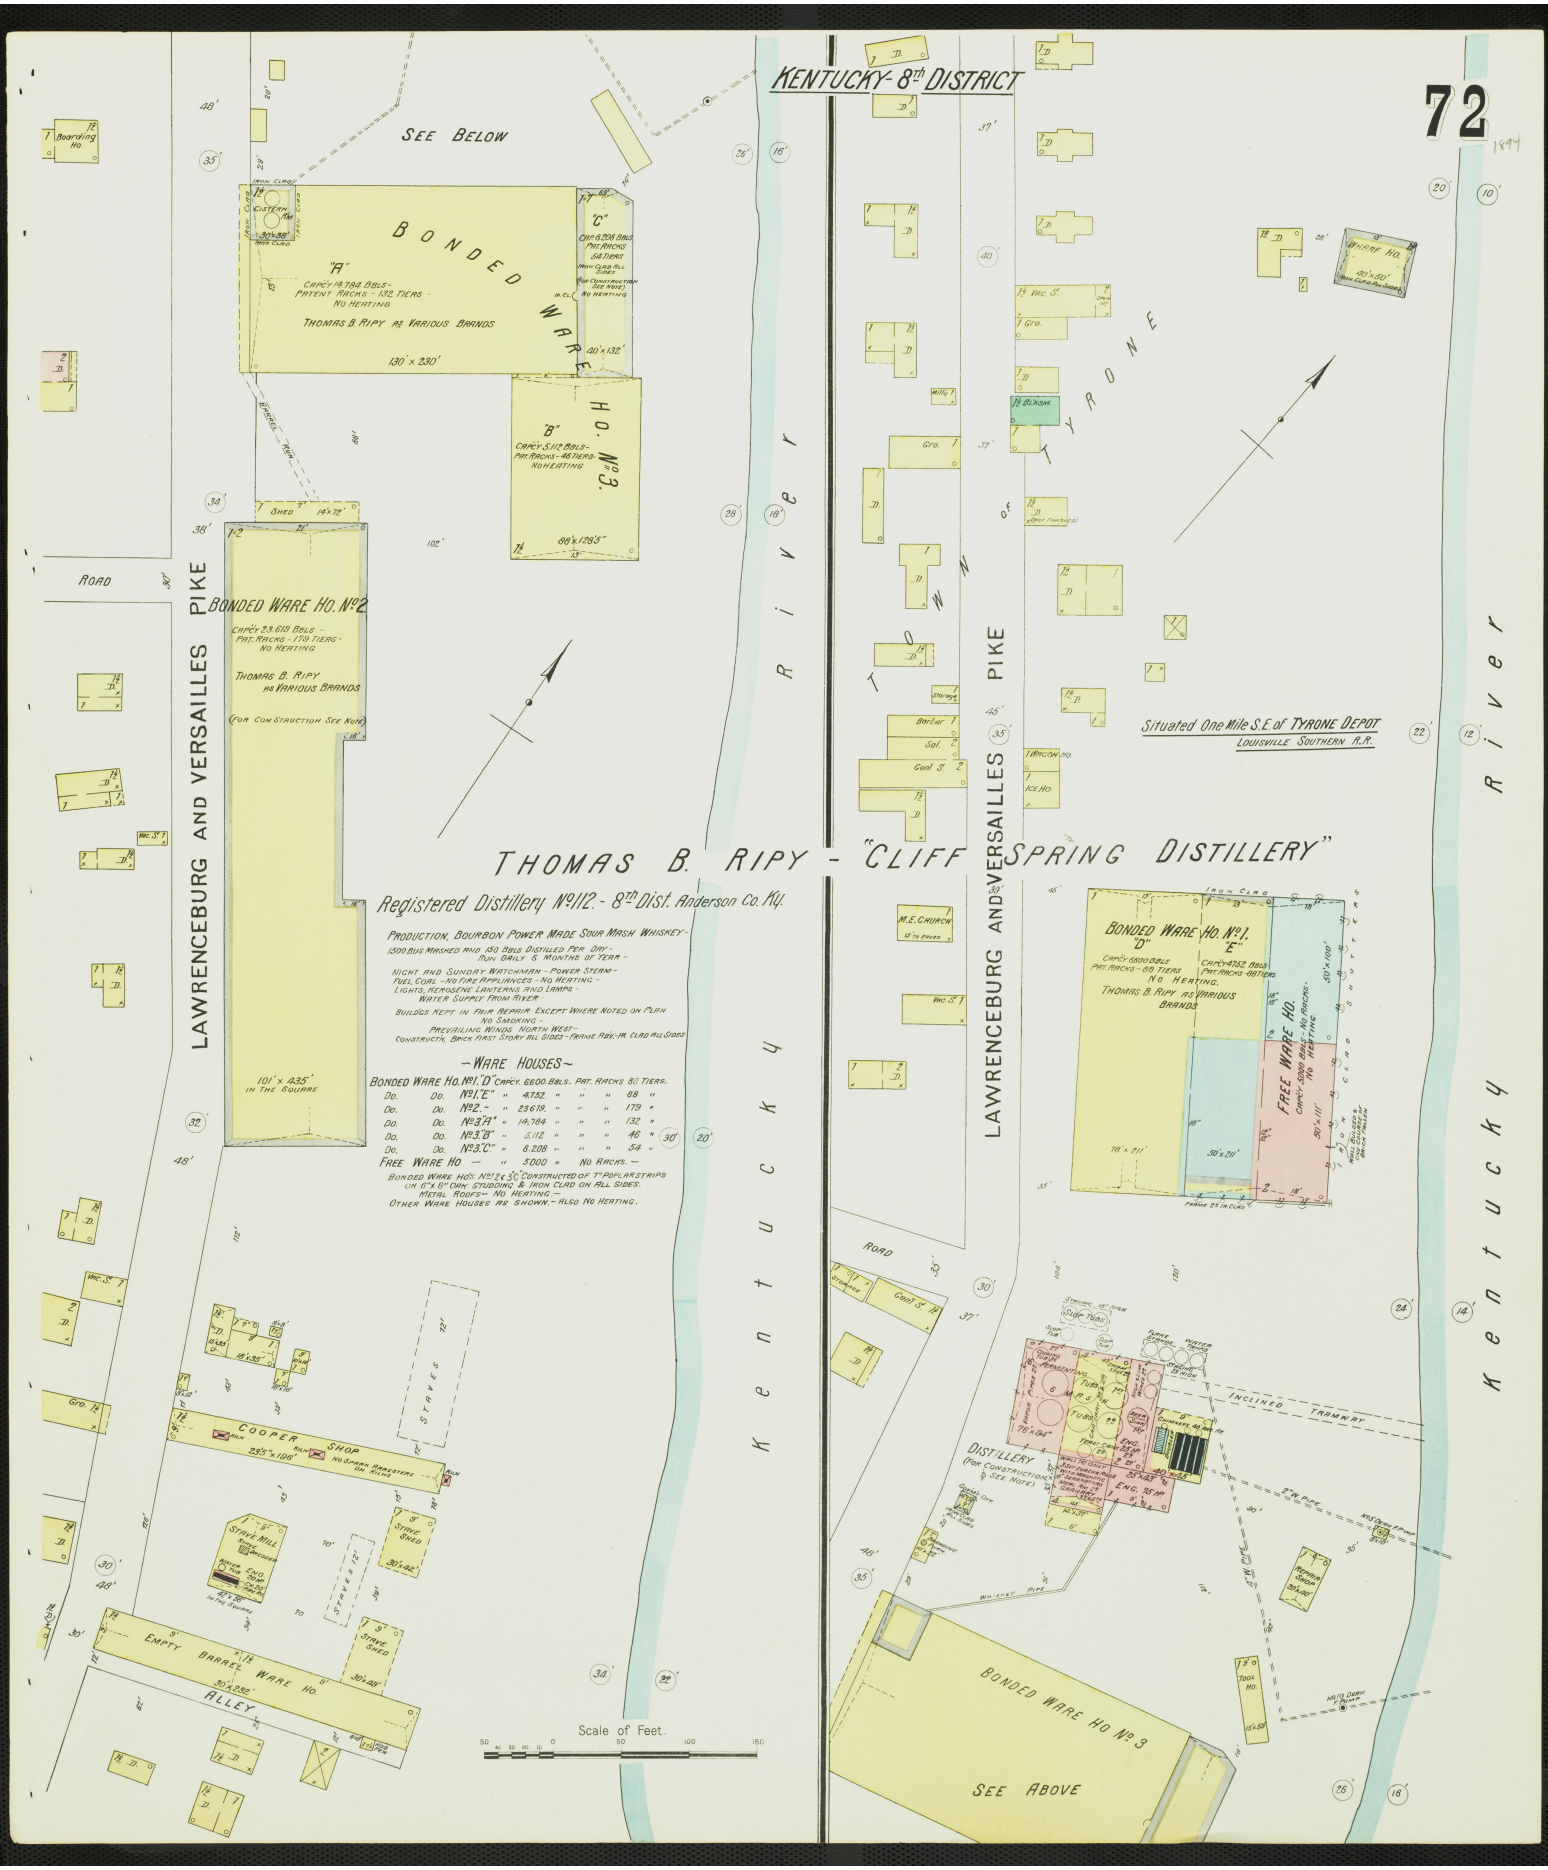
KENTUCKY - 8th DISTRICT
72
SEE BELOW
BONDED WARE HO. No. 3.
"A" CAPCY 14,784 BBLS - PATENT RACKS - 132 TIERS - NO HEATING
THOMAS B. RIPY AS VARIOUS BRANDS
130' x 230'
"C" CAP 6,208 BBLS PAT. RACKS 54 TIERS
"B" CAPCY 5,112 BBLS - PAT. RACKS - 46 TIERS - NO HEATING
88' x 128'5"
BONDED WARE HO. No. 2
CAPCY 23,619 BBLS - PAT. RACKS - 179 TIERS - NO HEATING
THOMAS B. RIPY AS VARIOUS BRANDS
(FOR CONSTRUCTION SEE NOTE)
101' x 435' IN THE SQUARE
LAWRENCEBURG AND VERSAILLES PIKE
ROAD
Kentucky River
TOWN OF TYRONE
Situated One Mile S.E. of TYRONE DEPOT
LOUISVILLE SOUTHERN R.R.
THOMAS B. RIPY - "CLIFF SPRING DISTILLERY"
Registered Distillery No. 112. - 8th Dist. Anderson Co. Ky.
PRODUCTION, BOURBON POWER MADE SOUR MASH WHISKEY -
1500 BUS MASHED AND 150 BBLS DISTILLED PER DAY - RUN DAILY 6 MONTHS OF YEAR -
NIGHT AND SUNDAY WATCHMAN - POWER STEAM - FUEL, COAL - NO FIRE APPLIANCES - NO HEATING - LIGHTS, KEROSENE LANTERNS AND LAMPS - WATER SUPPLY FROM RIVER
BUILDGS KEPT IN FAIR REPAIR EXCEPT WHERE NOTED ON PLAN NO SMOKING -
PREVAILING WINDS NORTH WEST - CONSTRUCTN. BRICK FIRST STORY ALL SIDES - FRAME RAY. IR. CLAD ALL SIDES
- WARE HOUSES -
BONDED WARE HO. No. 1. "D" CAPCY. 6600 BBLS. PAT. RACKS 80 TIERS.
Do. Do. No. 1. "E" " 4752. " " " 88 "
Do. Do. No. 2. - " 23619. " " " 179 "
Do. Do. No. 3. "A" " 14,784 " " " 132 "
Do. Do. No. 3. "B" " 5,112 " " " 46 "
Do. Do. No. 3. "C" " 8,208 " " " 54 "
FREE WARE HO — " 5000 " NO RACKS. —
BONDED WARE HO'S No. 2 & 3 "C" CONSTRUCTED OF 7" POPLAR STRIPS ON 6" x 8" OAK STUDDING & IRON CLAD ON ALL SIDES. METAL ROOFS - NO HEATING. -
OTHER WARE HOUSES AS SHOWN. - ALSO NO HEATING.
BONDED WARE HO. No. 1. "D" "E"
CAPCY 6800 BBLS PAT. RACKS - 88 TIERS
CAPCY 4752 BBLS PAT. RACKS - 88 TIERS
NO HEATING.
THOMAS B. RIPY AS VARIOUS BRANDS
FREE WARE HO.
CAPCY 5000 BBLS - NO RACKS - NO HEATING.
IRON CLAD
IRON CLAD SHUTTERS
WALL BUILDED & PAINTED ON BACK & FALLEN
M.E. CHURCH
COOPER SHOP
NO SPARK ARRESTERS ON RAILS
STAVES
STAVE MILL
STAVE SHED
EMPTY BARREL WARE HO.
ALLEY
DISTILLERY (FOR CONSTRUCTION SEE NOTE)
INCLINED TRAMWAY
WHISKEY PIPE
BONDED WARE HO No. 3
SEE ABOVE
Scale of Feet.

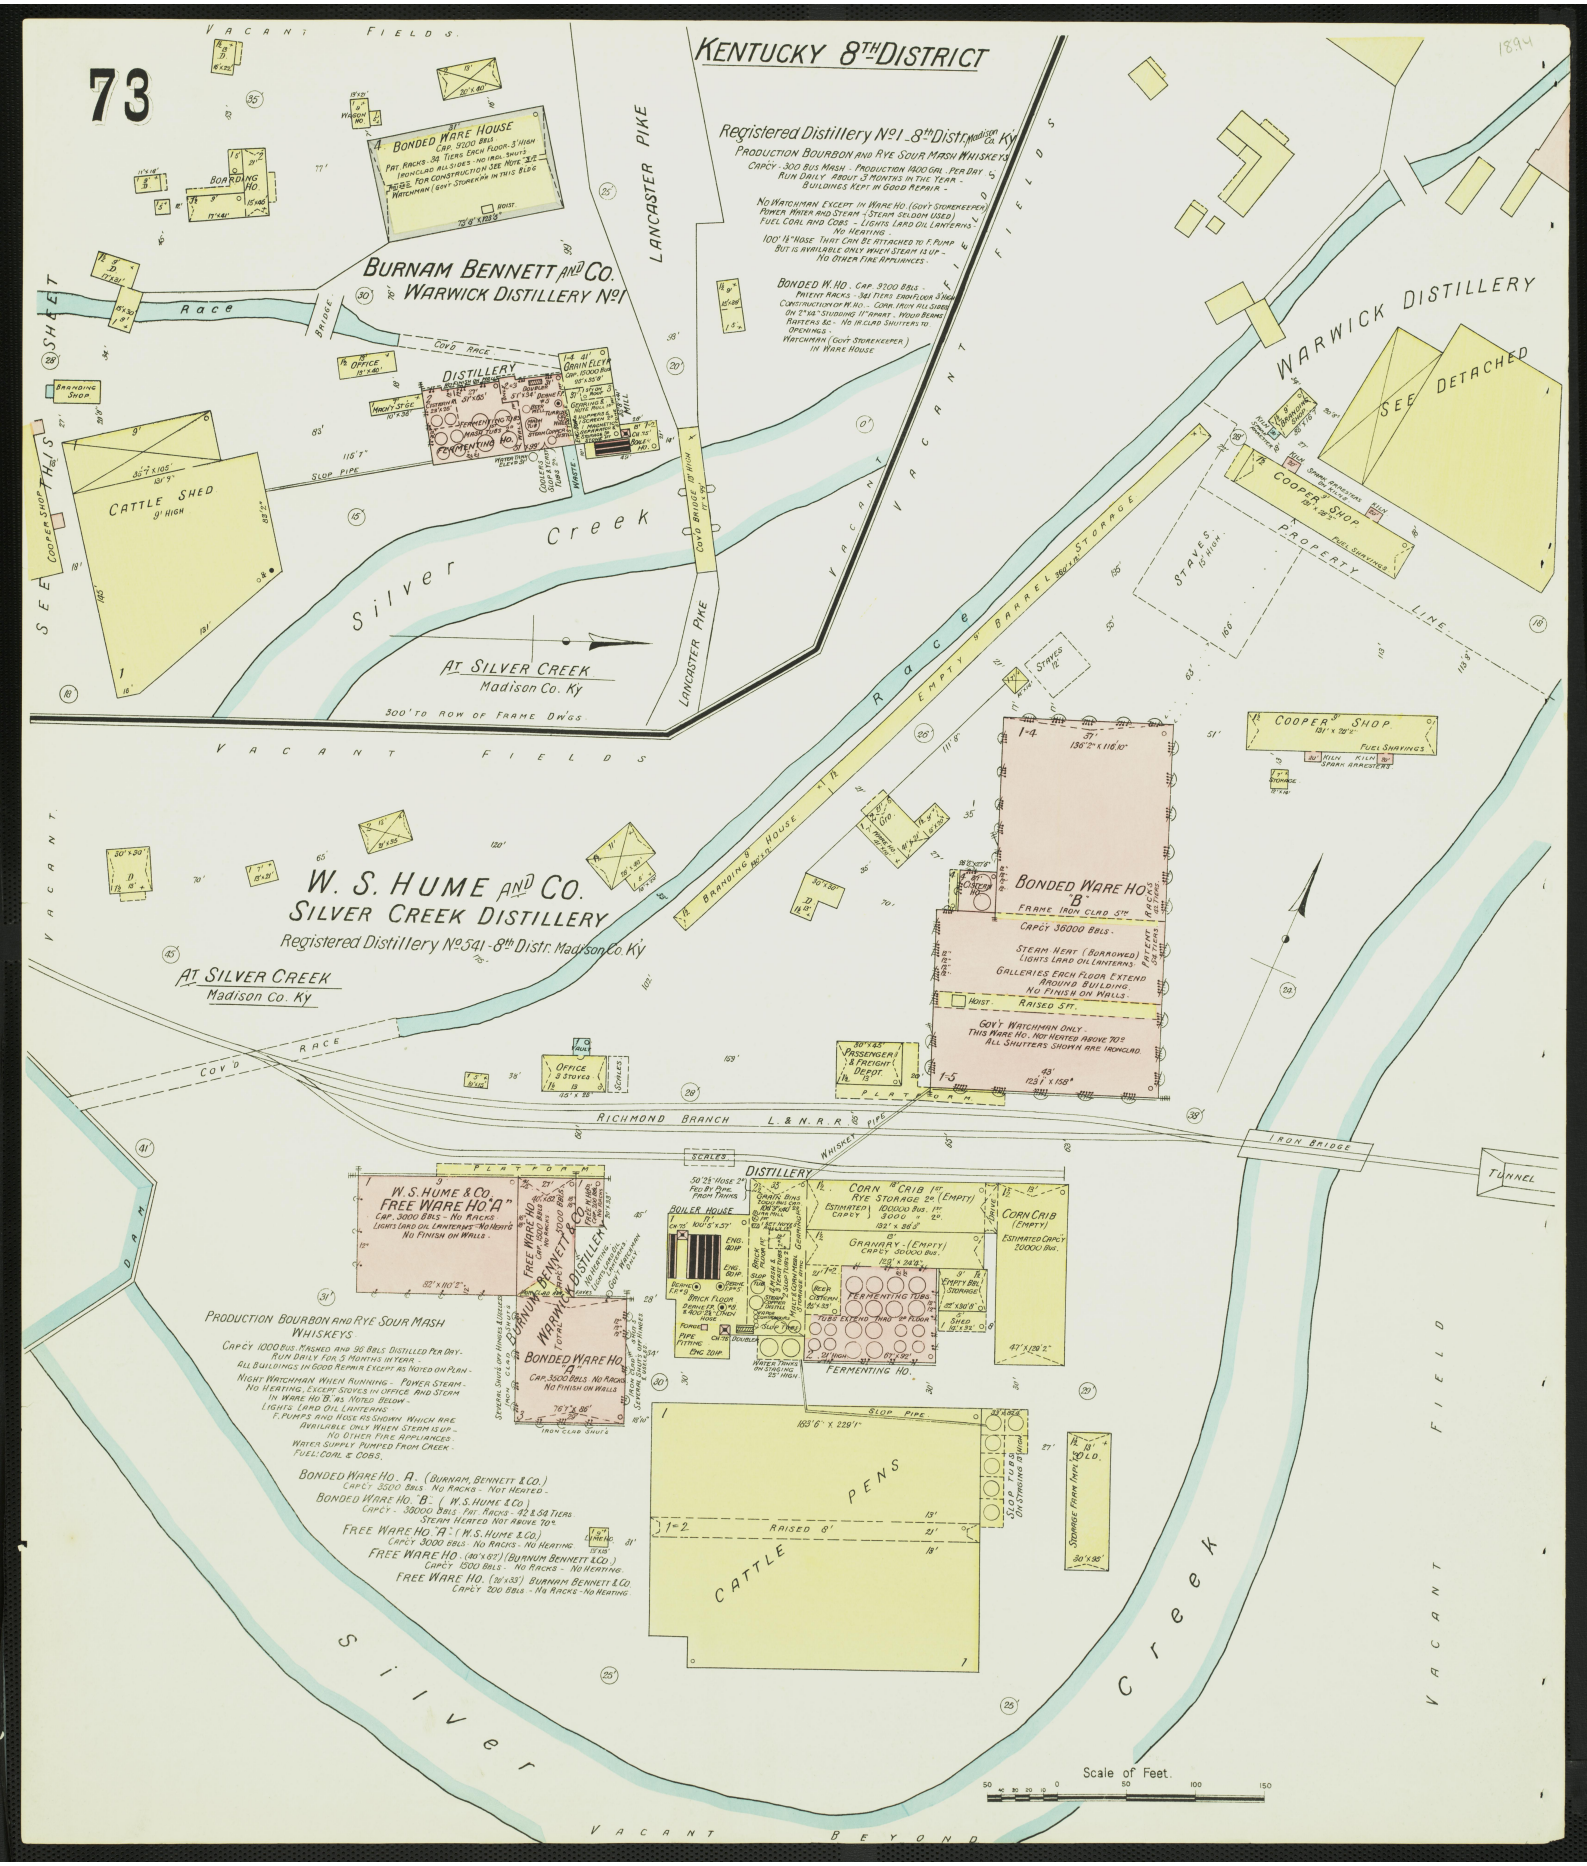
73
KENTUCKY 8TH DISTRICT
Registered Distillery No1 - 8th Distr. Madison Co. Ky
Production Bourbon and Rye Sour Mash Whiskeys
Capcy - 300 Bus Mash - Production 1400 Gal. Per Day
Run Daily About 3 Months in the Year -
Buildings Kept in Good Repair -
No Watchman Except in Ware Ho. (Govt Storekeeper)
Power Hoist and Steam - Steam Saloon (Used)
Fuel Coal and Cobs - Lights Lard Oil Lanterns -
No Heating.
100' 1½" Hose That Can Be Attached to F. Pump
But is Available Only When Steam is Up -
No Other Fire Appliances -
Bonded W. Ho. - Cap. 3700 Bbls
Patent Racks - 341 Tiers Each Floor 3 High
Construction of W. Ho. - Corr. Iron All Sides
On 2nd & 3rd Floors 17 Armat. Wood Bearers
Rafters &c - No Iron Clad Shutters to
Openings -
Watchman (Govt Storekeeper)
In Ware House
BONDED WARE HOUSE
Cap. 9000 Bbls
Pat. Racks - 98 Tiers Each Floor - 3 High
Ironclad All Sides - No Iron Shuts
See Construction See Note 3rd
Watchman (Govt Storekeeper) in This Bldg
BURNAM BENNETT AND CO.
WARWICK DISTILLERY No1
LANCASTER PIKE
Race
Cov'd Race
Silver Creek
Bridge
Cattle Shed
9' High
Cooper Shop
See Detached
Branding Shop
Office
Distillery
Fermenting No.
Cooler & Slop Tank
Slop Pipe
Cov'd Bridge 40' High
At Silver Creek
Madison Co. Ky
300' to ROW of Frame Dw'gs
Vacant Fields
Vacant
Warwick Distillery
Empty Barrel Storage
Staves 12' High
Property Line
Cooper Shop
Fuel Shavings
Spark Arresters
W. S. HUME AND CO.
SILVER CREEK DISTILLERY
Registered Distillery No. 541 - 8th Distr. Madison Co. Ky
At Silver Creek
Madison Co. Ky
Bonded Ware Ho. "B"
Frame Iron Clad 5 Ft.
Capcy 36000 Bbls.
Steam Heat (Borrowed)
Lights Lard Oil Lanterns
Galleries Each Floor Extend
Around Building.
No Finish on Walls.
Hoist - Raised 5 Ft.
Gov't Watchman Only -
This Ware Ho. Not Heated Above 70°
All Shutters Shown are Ironclad
Passenger & Freight Depot
Office 2 Stories
Scales
Richmond Branch L. & N. R. R.
Iron Bridge
Tunnel
Whiskey Pipe
Distillery
W. S. Hume & Co.
Free Ware Ho "A"
Cap. 3000 Bbls - No Racks
Lights Lard Oil Lanterns - No Heating
No Finish on Walls
Free Ware Ho.
Cap. 3500 Bbls
Burnam Bennett & Co.
Warwick Distillery
Bonded Ware Ho. "A"
Cap. 3500 Bbls. No Racks
No Finish on Walls
Iron Clad Shuts
Boiler House
Engine Room
Brick Floor
Pipe Fitting
Engine Room
Corn Crib 1st Rye Storage 2d (Empty)
Estimated Capcy 60000 Bus. 1st
Capcy 3000 " 2d
Granary - (Empty)
Capcy 30000 Bus.
Corn Crib (Empty)
Estimated Capcy 50000 Bu.
Fermenting Tubs
Empty Bbl. Storage
Shed
Fermenting No.
Water Tanks on Staging 25' High
Production Bourbon and Rye Sour Mash Whiskeys
Capcy 1000 Bus. Mashed and 98 Bbls Distilled Per Day -
Run Daily for 5 Months in Year -
All Buildings in Good Repair Except as Noted on Plan -
Night Watchman When Running - Power Steam -
No Heating. Except Stoves in Office and Steam
in Ware Ho "B" as Noted Below -
Lights Lard Oil Lanterns -
F. Pumps and Hose as Shown Which are
Available Only When Steam is Up -
No Other Fire Appliances -
Water Supply Pumped From Creek -
Fuel: Coal & Cobs.
Bonded Ware Ho. "A" (Burnam, Bennett & Co.)
Capcy 3500 Bbls. No Racks - Not Heated -
Bonded Ware Ho. "B" (W. S. Hume & Co.)
Capcy - 36000 Bbls. Pat. Racks - 92 & 58 Tiers
Steam Heated Not Above 70°
Free Ware Ho. "A" (W. S. Hume & Co.)
Capcy 3000 Bbls - No Racks - No Heating
Free Ware Ho. (40'x67') (Burnam Bennett & Co.)
Capcy 1500 Bbls - No Racks - No Heating.
Free Ware Ho. (26'x33') Burnam Bennett & Co.
Capcy 700 Bbls - No Racks - No Heating.
Pens
Cattle
Raised 8'
Slop Pipe
Stock Tr. & S.
Stockman Farm Impl. Co.
Stockade Farm Impl. Co.
Silver Creek
Vacant Field
Vacant Beyond
Scale of Feet.
0 50 100 150

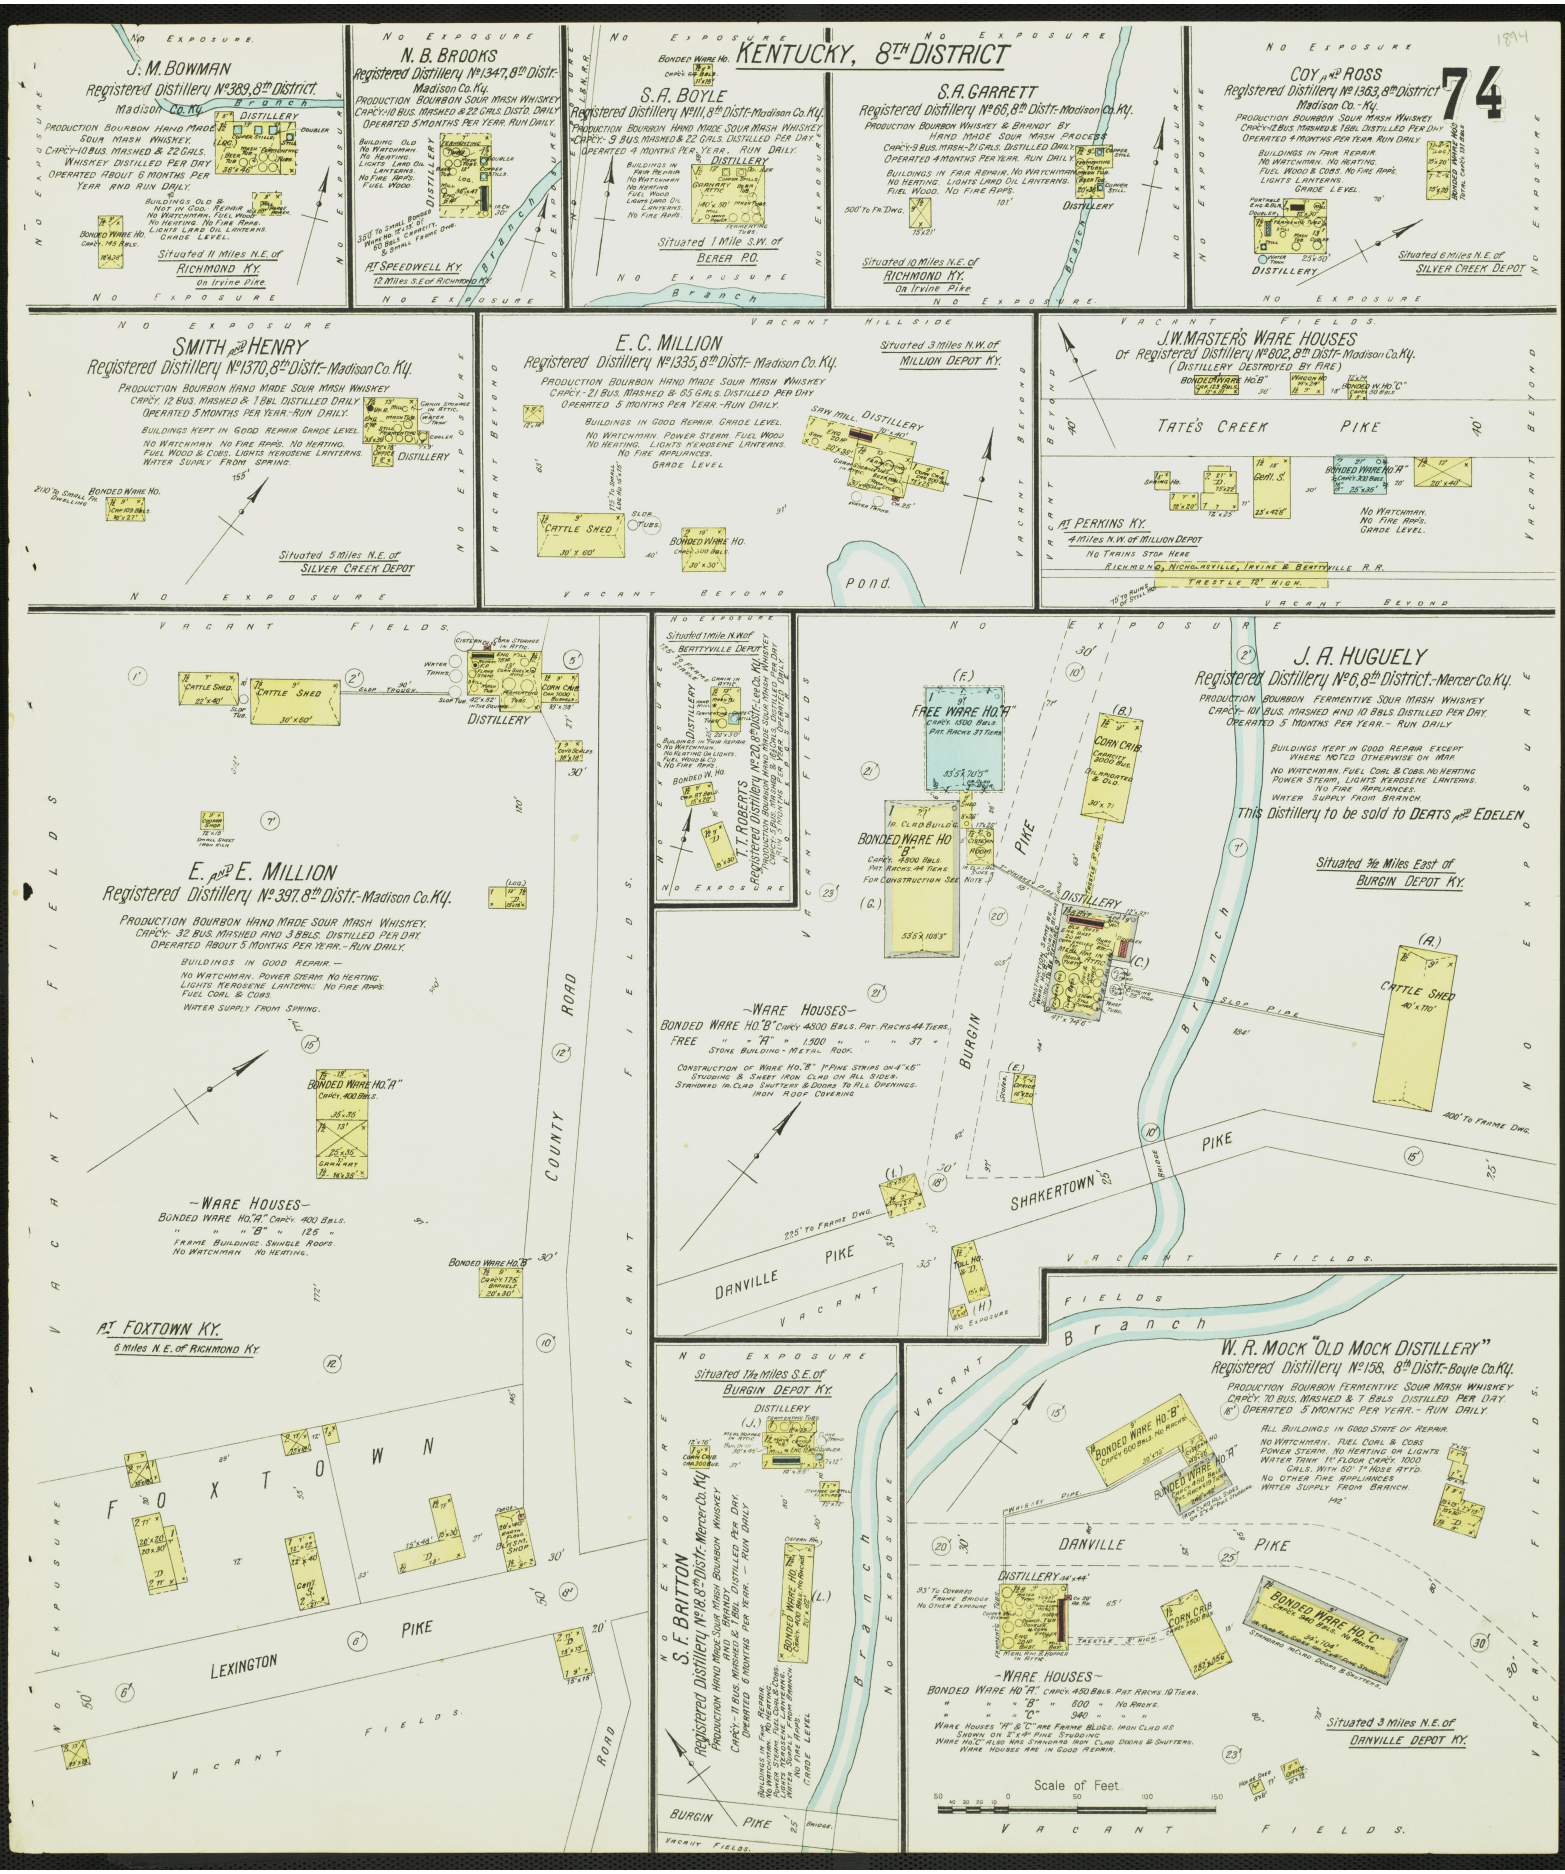

1894
74
KENTUCKY, 8TH DISTRICT
J. M. BOWMAN
Registered Distillery No 389, 8th District.
Madison Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY-10 BUS. MASHED & 22 GALS. WHISKEY DISTILLED PER DAY. OPERATED ABOUT 6 MONTHS PER YEAR AND RUN DAILY.
BUILDINGS OLD & NOT IN GOOD REPAIR. NO WATCHMAN. FUEL WOOD. NO HEATING. NO FIRE APPS. LIGHTS LARD OIL LANTERNS. GRADE LEVEL.
Situated 11 Miles N.E. of RICHMOND KY.
On Irvine Pike
N. B. BROOKS
Registered Distillery No 1347, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON SOUR MASH WHISKEY. CAPCY-10 BUS. MASHED & 22 GALS. DISTD. DAILY. OPERATED 5 MONTHS PER YEAR. RUN DAILY.
BUILDING OLD. NO WATCHMAN. NO HEATING. LIGHTS LARD OIL LANTERNS. NO FIRE APPS. FUEL WOOD.
AT SPEEDWELL KY.
12 Miles S.E. of RICHMOND KY.
S. A. BOYLE
Registered Distillery No 111, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY- 9 BUS. MASHED & 22 GALS. DISTILLED PER DAY. OPERATED 4 MONTHS PER YEAR. RUN DAILY.
BUILDINGS IN FAIR REPAIR. NO WATCHMAN. NO HEATING. FUEL WOOD. LIGHTS LARD OIL LANTERNS. NO FIRE APPS.
Situated 1 Mile S.W. of BEREA P.O.
S. A. GARRETT
Registered Distillery No 66, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON WHISKEY & BRANDY BY HAND MADE SOUR MASH PROCESS. CAPCY-9 BUS. MASH-21 GALS. DISTILLED DAILY. OPERATED 4 MONTHS PER YEAR. RUN DAILY.
BUILDINGS IN FAIR REPAIR. NO WATCHMAN. NO HEATING. LIGHTS LARD OIL LANTERNS. FUEL WOOD. NO FIRE APPS.
Situated 10 Miles N.E. of RICHMOND KY.
On Irvine Pike
COY AND ROSS
Registered Distillery No 1363, 8th District
Madison Co.-Ky.
PRODUCTION BOURBON SOUR MASH WHISKEY. CAPCY-12 BUS. MASHED & 18 BL. DISTILLED PER DAY. OPERATED 4 MONTHS PER YEAR. RUN DAILY.
BUILDINGS IN FAIR REPAIR. NO WATCHMAN. NO HEATING. FUEL WOOD & COBS. NO FIRE APPS. LIGHTS LANTERNS. GRADE LEVEL.
Situated 6 Miles N.E. of SILVER CREEK DEPOT
SMITH AND HENRY
Registered Distillery No 1370, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY. 12 BUS. MASHED & 7 BBL. DISTILLED DAILY. OPERATED 5 MONTHS PER YEAR.-RUN DAILY.
BUILDINGS KEPT IN GOOD REPAIR. GRADE LEVEL.
NO WATCHMAN. NO FIRE APPS. NO HEATING. FUEL WOOD & COBS. LIGHTS KEROSENE LANTERNS. WATER SUPPLY FROM SPRING.
Situated 5 Miles N.E. of SILVER CREEK DEPOT
E. C. MILLION
Registered Distillery No 1335, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY.-21 BUS. MASHED & 65 GALS. DISTILLED PER DAY. OPERATED 5 MONTHS PER YEAR.-RUN DAILY.
BUILDINGS IN GOOD REPAIR. GRADE LEVEL.
NO WATCHMAN. POWER STEAM. FUEL WOOD. NO HEATING. LIGHTS KEROSENE LANTERNS. NO FIRE APPLIANCES. GRADE LEVEL.
Situated 3 Miles N.W. of MILLION DEPOT KY.
J. W. MASTER'S WARE HOUSES
Of Registered Distillery No 802, 8th Distr.-Madison Co. Ky.
(DISTILLERY DESTROYED BY FIRE)
TATE'S CREEK PIKE
AT PERKINS KY.
4 Miles N.W. of MILLION DEPOT
NO TRAINS STOP HERE
RICHMOND, NICHOLASVILLE, IRVINE & BEATTYVILLE R.R.
TRESTLE 72' HIGH.
NO WATCHMAN. NO FIRE APPS. GRADE LEVEL.
E. AND E. MILLION
Registered Distillery No 397, 8th Distr.-Madison Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY- 32 BUS. MASHED AND 3 BBLS. DISTILLED PER DAY. OPERATED ABOUT 5 MONTHS PER YEAR.-RUN DAILY.
BUILDINGS IN GOOD REPAIR.
NO WATCHMAN. POWER STEAM. NO HEATING. LIGHTS KEROSENE LANTERNS. NO FIRE APPS. FUEL COAL & COBS. WATER SUPPLY FROM SPRING.
-WARE HOUSES-
BONDED WARE HO. "A" CAPCY. 400 BBLS.
" " " "B" " 125 "
FRAME BUILDINGS. SHINGLE ROOFS. NO WATCHMAN. NO HEATING.
AT FOXTOWN KY.
6 Miles N.E. of RICHMOND KY.
FOXTOWN
LEXINGTON PIKE
COUNTY ROAD
VACANT FIELDS
Situated 1 Mile N.W. of BEATTYVILLE DEPOT
T. T. ROBERTS
Registered Distillery No 20, 8th Distr.-Lee Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY. CAPCY. 5 BUS. MASHED & 18 GALS. DISTILLED PER DAY. RUN 5 MONTHS PER YEAR. OPERATED DAILY.
J. A. HUGUELY
Registered Distillery No 6, 8th District.-Mercer Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY. CAPCY.- 101 BUS. MASHED AND 10 BBLS. DISTILLED PER DAY. OPERATED 5 MONTHS PER YEAR.- RUN DAILY.
BUILDINGS KEPT IN GOOD REPAIR EXCEPT WHERE NOTED OTHERWISE ON MAP.
NO WATCHMAN. FUEL COAL & COBS. NO HEATING. POWER STEAM. LIGHTS KEROSENE LANTERNS. NO FIRE APPLIANCES. WATER SUPPLY FROM BRANCH.
This Distillery to be sold to DEATS AND EDELEN
Situated 3/12 Miles East of BURGIN DEPOT KY.
-WARE HOUSES-
BONDED WARE HO. "B" CAPCY 4800 BBLS. PAT. RACKS 44 TIERS.
FREE " " "A" " 1500 " " " 37 "
STONE BUILDING - METAL ROOF.
CONSTRUCTION OF WARE HO. "B" 1" PINE STRIPS ON 4"x6" STUDDING & SHEET IRON CLAD ON ALL SIDES. STANDARD IR. CLAD SHUTTERS & DOORS TO ALL OPENINGS. IRON ROOF COVERING
BURGIN PIKE
SHAKERTOWN PIKE
DANVILLE PIKE
Situated 1 1/12 Miles S.E. of BURGIN DEPOT KY.
S. F. BRITTON
Registered Distillery No 18, 8th Distr.-Mercer Co. Ky.
PRODUCTION HAND MADE SOUR MASH BOURBON WHISKEY AND BRANDY. CAPCY.- 11 BUS. MASHED & 1 BBL. DISTILLED PER DAY. OPERATED 6 MONTHS PER YEAR. - RUN DAILY.
BUILDINGS IN FAIR REPAIR. NO WATCHMAN. NO HEATING. POWER STEAM. FUEL COAL & COBS. LIGHTS KEROSENE LANTERNS. WATER SUPPLY FROM BRANCH. NO FIRE APPS. GRADE LEVEL.
W. R. MOCK "OLD MOCK DISTILLERY"
Registered Distillery No 158, 8th Distr.-Boyle Co. Ky.
PRODUCTION BOURBON FERMENTIVE SOUR MASH WHISKEY. CAPCY. 70 BUS. MASHED & 7 BBLS. DISTILLED PER DAY. OPERATED 5 MONTHS PER YEAR.- RUN DAILY.
ALL BUILDINGS IN GOOD STATE OF REPAIR.
NO WATCHMAN. FUEL COAL & COBS. POWER STEAM. NO HEATING OR LIGHTS. WATER TANK 1st FLOOR CAPCY. 1000 GALS. WITH 50' 1" HOSE ATTD. NO OTHER FIRE APPLIANCES. WATER SUPPLY FROM BRANCH.
-WARE HOUSES-
BONDED WARE HO. "A" CAPCY. 450 BBLS. PAT. RACKS 19 TIERS.
" " " "B" " 600 " NO RACKS.
" " " "C" " 940 " " "
WARE HOUSES "A" & "C" ARE FRAME BLDGS. IRON CLAD AS SHOWN ON 2"x4" PINE STUDDING. WARE HO. "C" ALSO HAS STANDARD IRON CLAD DOORS & SHUTTERS. WARE HOUSES ARE IN GOOD REPAIR.
Situated 3 Miles N.E. of DANVILLE DEPOT KY.
Scale of Feet

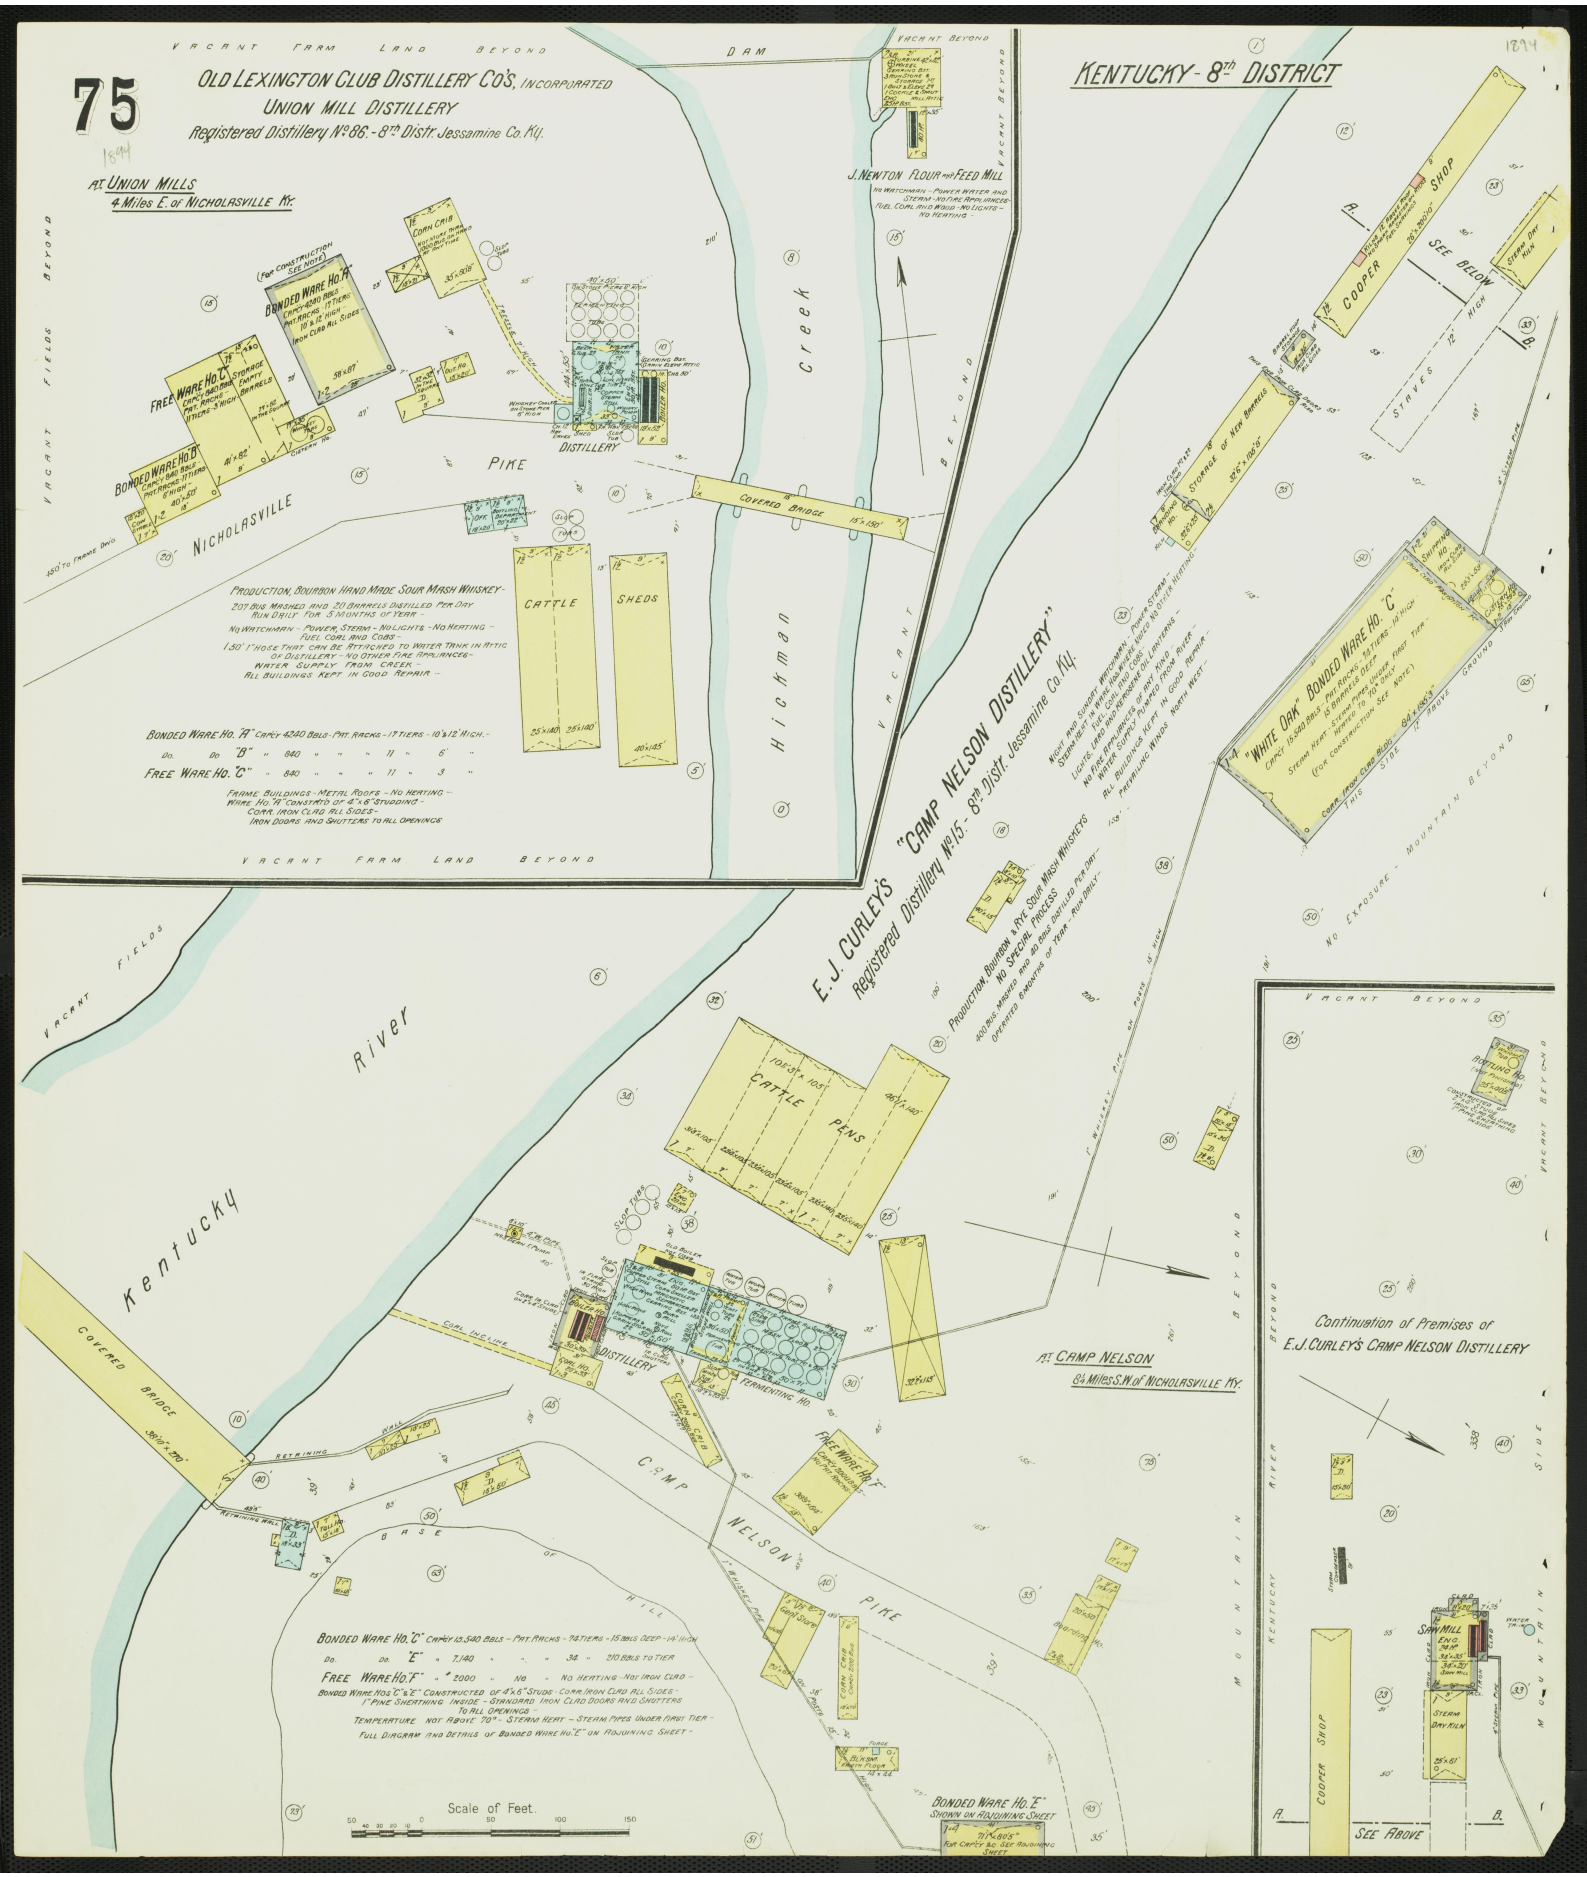
75
OLD LEXINGTON CLUB DISTILLERY CO'S, INCORPORATED
UNION MILL DISTILLERY
Registered Distillery No. 86. - 8th Distr. Jessamine Co. Ky.
AT UNION MILLS
4 Miles E. of NICHOLASVILLE Ky.
KENTUCKY - 8th DISTRICT
VACANT FARM LAND BEYOND
DAM
VACANT BEYOND
J. NEWTON FLOUR AND FEED MILL
NO WATCHMAN - POWER WATER AND STEAM - NO FIRE APPLIANCES - FUEL COAL AND WOOD - NO LIGHTS - NO HEATING -
BONDED WARE HO. "A"
FREE WARE HO. "C"
BONDED WARE HO. "B"
CORN CRIB
DISTILLERY
PIKE
NICHOLASVILLE
COVERED BRIDGE
CATTLE
SHEDS
Hickman
Creek
PRODUCTION, BOURBON HAND MADE SOUR MASH WHISKEY -
207 BUS MASHED AND 20 BARRELS DISTILLED PER DAY
RUN DAILY FOR 5 MONTHS OF YEAR -
NO WATCHMAN - POWER, STEAM - NO LIGHTS - NO HEATING -
FUEL COAL AND COBS -
1.50" 1" HOSE THAT CAN BE ATTACHED TO WATER TANK IN ATTIC OF DISTILLERY - NO OTHER FIRE APPLIANCES -
WATER SUPPLY FROM CREEK -
ALL BUILDINGS KEPT IN GOOD REPAIR -
BONDED WARE HO. "A" CAPCY 4240 BBLS - PAT. RACKS - 17 TIERS - 10' & 12' HIGH. -
DO. DO "B" " 840 " " " 11 " 6' "
FREE WARE HO. "C" " 840 " " " 11 " 3 "
FRAME BUILDINGS - METAL ROOFS - NO HEATING -
WARE HO. "A" CONSTRD OF 4" x 6" STUDDING -
CORR. IRON CLAD ALL SIDES -
IRON DOORS AND SHUTTERS TO ALL OPENINGS
VACANT FARM LAND BEYOND
COOPER SHOP
SEE BELOW
STAVES 12' HIGH
STORAGE OF NEW BARRELS
"WHITE OAK" BONDED WARE HO. "C"
E. J. CURLEY'S "CAMP NELSON DISTILLERY"
Registered Distillery No. 15. - 8th Distr. Jessamine Co. Ky.
PRODUCTION, BOURBON & RYE SOUR MASH WHISKEYS
NO SPECIAL PROCESS
400 BUS MASHED AND 40 BBLS DISTILLED PER DAY
OPERATED 6 MONTHS OF YEAR - RUN DAILY -
NO EXPOSURE - MOUNTAIN BEYOND
VACANT FIELDS
River
Kentucky
CATTLE PENS
DISTILLERY
FERMENTING HO.
COVERED BRIDGE
CAMP NELSON PIKE
AT CAMP NELSON
8¼ Miles S.W. of NICHOLASVILLE Ky.
FREE WARE HO. "F"
BONDED WARE HO. "C" CAPCY 15,540 BBLS - PAT. RACKS - 74 TIERS - 15 BBLS DEEP - 14' HIGH
DO. DO. "E" " 7,140 " " " 34 " 210 BBLS TO TIER
FREE WARE HO. "F" " 2000 " NO " NO HEATING - NOT IRON CLAD -
BONDED WARE HOS. "C" & "E" CONSTRUCTED OF 4" x 6" STUDS - CORR. IRON CLAD ALL SIDES -
1" PINE SHEATHING INSIDE - STANDARD IRON CLAD DOORS AND SHUTTERS TO ALL OPENINGS -
TEMPERATURE NOT ABOVE 70° - STEAM HEAT - STEAM PIPES UNDER FIRST TIER -
FULL DIAGRAM AND DETAILS OF BONDED WARE HO. "E" ON ADJOINING SHEET -
BONDED WARE HO. "E"
SHOWN ON ADJOINING SHEET
Scale of Feet.
Continuation of Premises of
E. J. CURLEY'S CAMP NELSON DISTILLERY
SAW MILL
STEAM DRY KILN
COOPER SHOP
SEE ABOVE
MOUNTAIN BEYOND
KENTUCKY RIVER

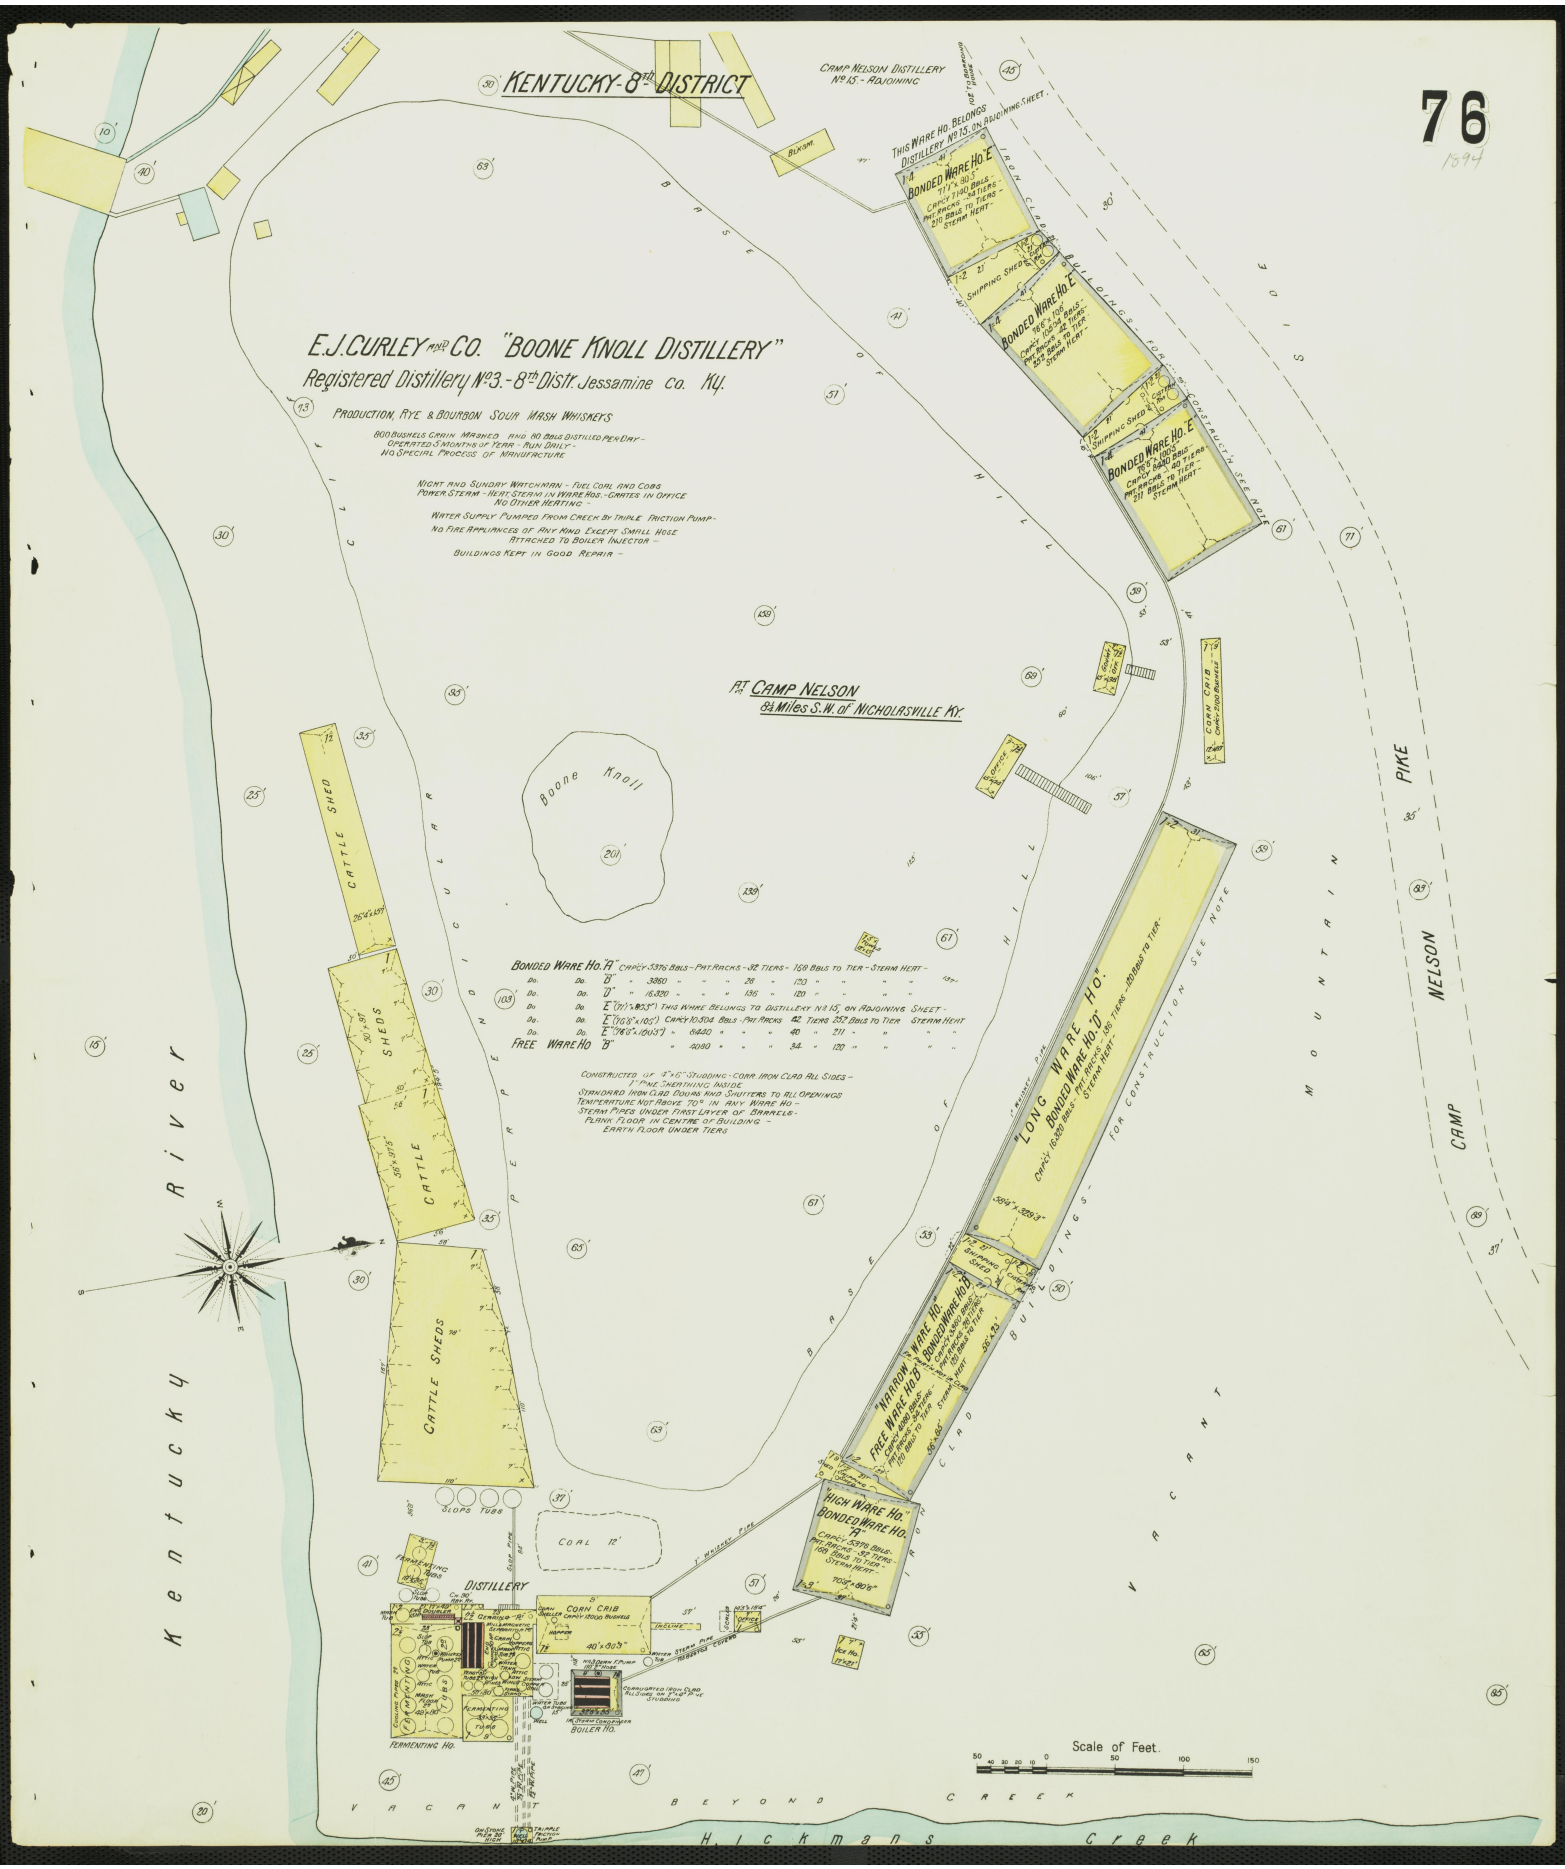
76
1894
KENTUCKY-8th DISTRICT
CAMP NELSON DISTILLERY No 15.- ADJOINING
THIS WARE HO. BELONGS DISTILLERY No 15. ON ADJOINING SHEET.
BONDED WARE HO. "E"
SHIPPING SHED
BONDED WARE HO. "E"
BONDED WARE HO. "E"
E.J. CURLEY AND CO. "BOONE KNOLL DISTILLERY"
Registered Distillery No 3.- 8th Distr. Jessamine Co. Ky.
PRODUCTION, RYE & BOURBON SOUR MASH WHISKEYS
800 BUSHELS GRAIN MASHED AND 80 BBLS DISTILLED PER DAY -
OPERATED 5 MONTHS OF YEAR - RUN DAILY -
NO SPECIAL PROCESS OF MANUFACTURE
NIGHT AND SUNDAY WATCHMAN - FUEL COAL AND COBS
POWER STEAM - HEAT STEAM IN WARE HOS. - GRATES IN OFFICE
NO OTHER HEATING -
WATER SUPPLY PUMPED FROM CREEK BY TRIPLE FRICTION PUMP -
NO FIRE APPLIANCES OF ANY KIND EXCEPT SMALL HOSE
ATTACHED TO BOILER INJECTOR -
BUILDINGS KEPT IN GOOD REPAIR -
AT CAMP NELSON
8½ Miles S.W. of NICHOLASVILLE KY.
Boone Knoll
CATTLE SHED
CATTLE SHEDS
CATTLE SHEDS
BONDED WARE HO. "A" CAPCY 5376 BBLS - PAT RACKS - 32 TIERS - 168 BBLS TO TIER - STEAM HEAT -
Do. Do. "B" " 3860 " " " 28 " 120 " " " "
Do. Do. "D" " 16320 " " " 136 " 120 " " " "
Do. Do. "E" (71'1" x 80'3") THIS WARE BELONGS TO DISTILLERY No 15, ON ADJOINING SHEET -
Do. Do. "E" (76'8" x 105') CAPCY 10504 BBLS - PAT RACKS 42 TIERS 252 BBLS TO TIER STEAM HEAT
Do. Do. "E" (76'6" x 100'5") " 6440 " " " 40 " 211 " " " "
FREE WARE HO "B" " 4080 " " " 34 " 120 " " " "
CONSTRUCTED OF 4"x6" STUDDING - CORR. IRON CLAD ALL SIDES -
1" PINE SHEATHING INSIDE
STANDARD IRON CLAD DOORS AND SHUTTERS TO ALL OPENINGS
TEMPERATURE NOT ABOVE 70° IN ANY WARE HO -
STEAM PIPES UNDER FIRST LAYER OF BARRELS -
PLANK FLOOR IN CENTRE OF BUILDING -
EARTH FLOOR UNDER TIERS
"LONG WARE HO." BONDED WARE HO. "D"
CAPCY 16320 BBLS - PAT RACKS - 136 TIERS - 120 BBLS TO TIER - STEAM HEAT -
"NARROW WARE HO." FREE WARE HO. "B" BONDED WARE HO. "B"
"HIGH WARE HO." BONDED WARE HO. "A"
CAPCY 5376 BBLS - PAT RACKS - 32 TIERS - 168 BBLS TO TIER - STEAM HEAT -
SLOPS TUBS
COAL 12'
DISTILLERY
CORN CRIB
FERMENTING HO.
BOILER HO.
Scale of Feet.
Kentucky River
CAMP NELSON PIKE
VACANT MOUNTAIN SIDE
VACANT BEYOND CREEK
Hickmans Creek

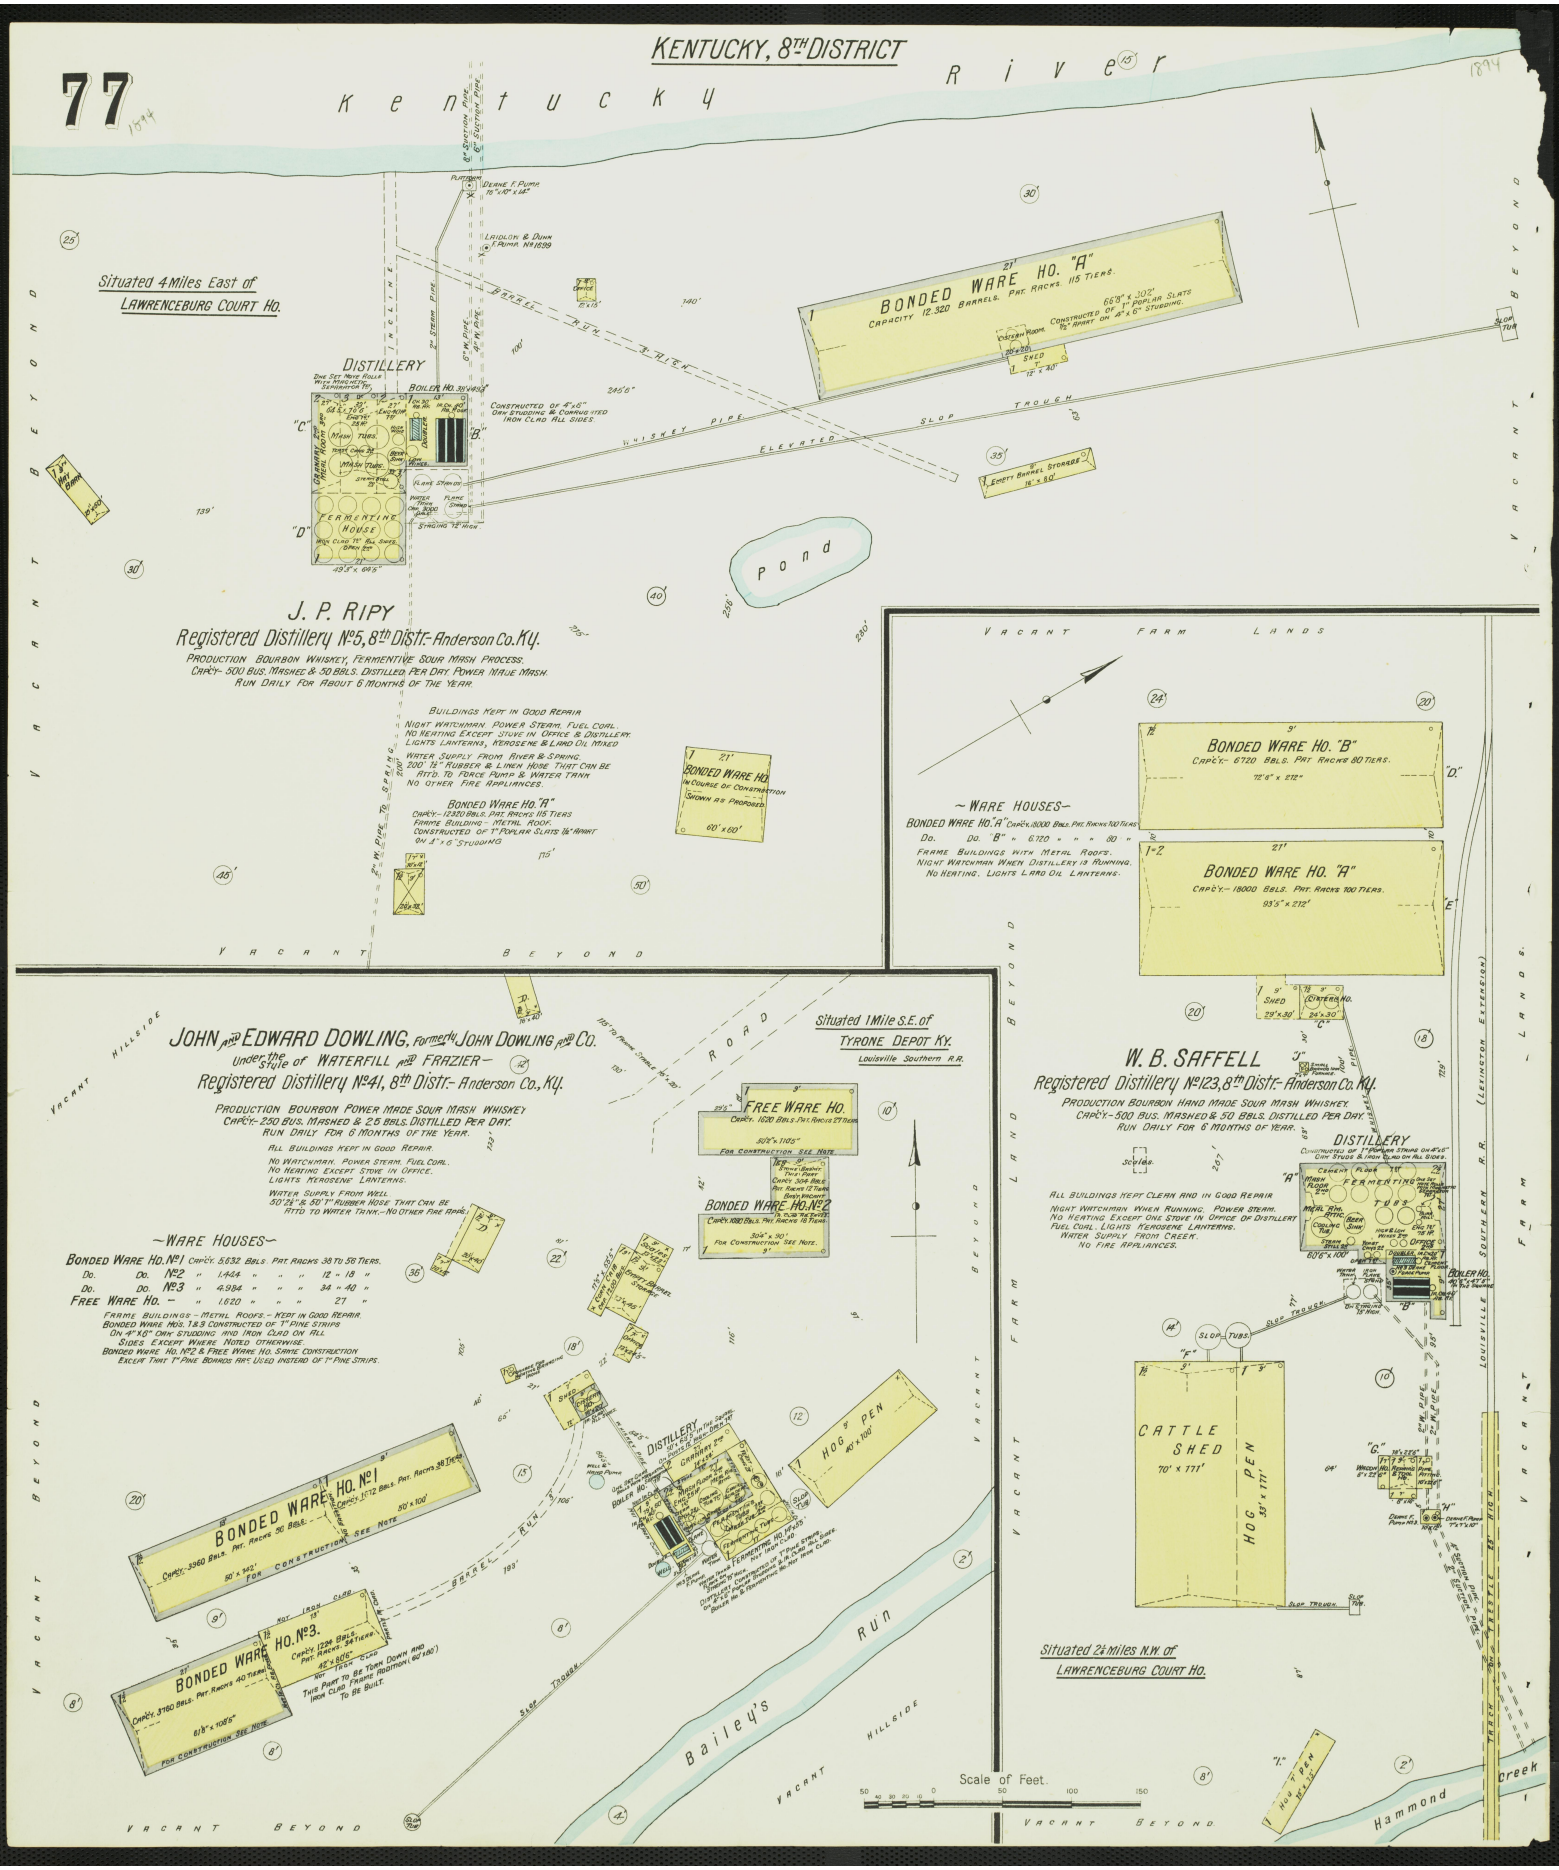
77
KENTUCKY, 8TH DISTRICT
Kentucky River
Situated 4 Miles East of LAWRENCEBURG COURT HO.
DISTILLERY
BOILER HO.
FERMENTING HOUSE
BONDED WARE HO. "A"
CAPACITY 12,320 BARRELS. PAT. RACKS. 115 TIERS.
CONSTRUCTED OF 1" POPLAR SLATS
WHISKEY PIPE
ELEVATED SLOP TROUGH
Pond
J. P. RIPY
Registered Distillery No. 5, 8th Distr.- Anderson Co. Ky.
PRODUCTION BOURBON WHISKEY, FERMENTIVE SOUR MASH PROCESS.
CAP'CY- 500 BUS. MASHED & 50 BBLS. DISTILLED PER DAY. POWER MADE MASH.
RUN DAILY FOR ABOUT 6 MONTHS OF THE YEAR.
BUILDINGS KEPT IN GOOD REPAIR
NIGHT WATCHMAN. POWER STEAM. FUEL COAL.
NO HEATING EXCEPT STOVE IN OFFICE & DISTILLERY.
LIGHTS LANTERNS, KEROSENE & LARD OIL MIXED
WATER SUPPLY FROM RIVER & SPRING.
200' 1½" RUBBER & LINEN HOSE THAT CAN BE ATT'D. TO FORCE PUMP & WATER TANK
NO OTHER FIRE APPLIANCES.
BONDED WARE HO. "A"
CAP'CY.- 12,320 BBLS. PAT. RACKS 115 TIERS
FRAME BUILDING - METAL ROOF.
CONSTRUCTED OF 1" POPLAR SLATS ½" APART ON 4" x 6" STUDDING
BONDED WARE HO.
IN COURSE OF CONSTRUCTION SHOWN AS PROPOSED
60' x 60'
VACANT BEYOND
VACANT FARM LANDS
BONDED WARE HO. "B"
CAP'CY.- 6720 BBLS. PAT. RACKS 80 TIERS.
72'6" x 272'
BONDED WARE HO. "A"
CAP'CY.- 18000 BBLS. PAT. RACKS 100 TIERS.
93'5" x 272'
~WARE HOUSES~
BONDED WARE HO. "A" CAP'CY. 18000 BBLS. PAT. RACKS 100 TIERS
DO. DO. "B" " 6720 " " " 80 "
FRAME BUILDINGS WITH METAL ROOFS.
NIGHT WATCHMAN WHEN DISTILLERY IS RUNNING.
NO HEATING. LIGHTS LARD OIL LANTERNS.
W. B. SAFFELL
Registered Distillery No. 123, 8th Distr.- Anderson Co. Ky.
PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY.
CAP'CY.- 500 BUS. MASHED & 50 BBLS. DISTILLED PER DAY.
RUN DAILY FOR 6 MONTHS OF YEAR.
DISTILLERY
CONSTRUCTED OF 1" POPLAR STRIPS ON 4"x6" CAP STUDS & IRON CLAD ON ALL SIDES.
FERMENTING TUBS
ALL BUILDINGS KEPT CLEAN AND IN GOOD REPAIR
NIGHT WATCHMAN WHEN RUNNING. POWER STEAM.
NO HEATING EXCEPT ONE STOVE IN OFFICE OF DISTILLERY
FUEL COAL. LIGHTS KEROSENE LANTERNS.
WATER SUPPLY FROM CREEK.
NO FIRE APPLIANCES.
CATTLE SHED
70' x 177'
HOG PEN
33' x 177'
Situated 2¼ miles N.W. of LAWRENCEBURG COURT HO.
JOHN AND EDWARD DOWLING, Formerly JOHN DOWLING AND CO.
Under the Style of WATERFILL AND FRAZIER-
Registered Distillery No. 41, 8th Distr.- Anderson Co., Ky.
PRODUCTION BOURBON POWER MADE SOUR MASH WHISKEY
CAP'CY.- 250 BUS. MASHED & 25 BBLS. DISTILLED PER DAY.
RUN DAILY FOR 6 MONTHS OF THE YEAR.
ALL BUILDINGS KEPT IN GOOD REPAIR.
NO WATCHMAN. POWER STEAM. FUEL COAL.
NO HEATING EXCEPT STOVE IN OFFICE.
LIGHTS KEROSENE LANTERNS.
WATER SUPPLY FROM WELL
50' 2½" & 50' 1" RUBBER HOSE THAT CAN BE ATT'D TO WATER TANK.- NO OTHER FIRE APPL.
~WARE HOUSES~
BONDED WARE HO. No. 1 CAP'CY. 5,632 BBLS. PAT. RACKS 38 TO 56 TIERS.
DO. DO. No. 2 " 1,444 " " " 12 " 18 "
DO. DO. No. 3 " 4,984 " " " 34 " 40 "
FREE WARE HO. - " 1,620 " " " 27 "
FRAME BUILDINGS - METAL ROOFS. - KEPT IN GOOD REPAIR.
BONDED WARE HO'S. 1 & 3 CONSTRUCTED OF 1" PINE STRIPS ON 4"x6" CAP STUDDING AND IRON CLAD ON ALL SIDES EXCEPT WHERE NOTED OTHERWISE.
BONDED WARE HO. No. 2 & FREE WARE HO. SAME CONSTRUCTION EXCEPT THAT 1" PINE BOARDS ARE USED INSTEAD OF 1" PINE STRIPS.
Situated 1 Mile S.E. of TYRONE DEPOT KY.
Louisville Southern R.R.
FREE WARE HO.
CAP'CY. 1620 BBLS. PAT. RACKS 27 TIERS
50'2" x 110'5"
FOR CONSTRUCTION SEE NOTE
BONDED WARE HO. No. 2
CAP'CY. 1080 BBLS. PAT. RACKS 18 TIERS.
50'4" x 90'
FOR CONSTRUCTION SEE NOTE.
BONDED WARE HO. No. 1
CAP'CY. 3960 BBLS. PAT. RACKS 50 BBLS.
50' x 142'
FOR CONSTRUCTION SEE NOTE
BONDED WARE HO. No. 3.
CAP'CY. 1224 BBLS. PAT. RACKS 34 TIERS.
42' x 80'6"
NOT IRON CLAD
THIS PART TO BE TORN DOWN AND IRON CLAD. FRAME ADDITION (60' x 80') TO BE BUILT.
CAP'CY. 3760 BBLS. PAT. RACKS 40 TIERS
61'8" x 108'5"
FOR CONSTRUCTION SEE NOTE
DISTILLERY
HOG PEN
40' x 100'
Bailey's Run
VACANT HILLSIDE
VACANT BEYOND
Scale of Feet.
Hammond Creek
LOUISVILLE SOUTHERN R.R. (LEXINGTON EXTENSION)

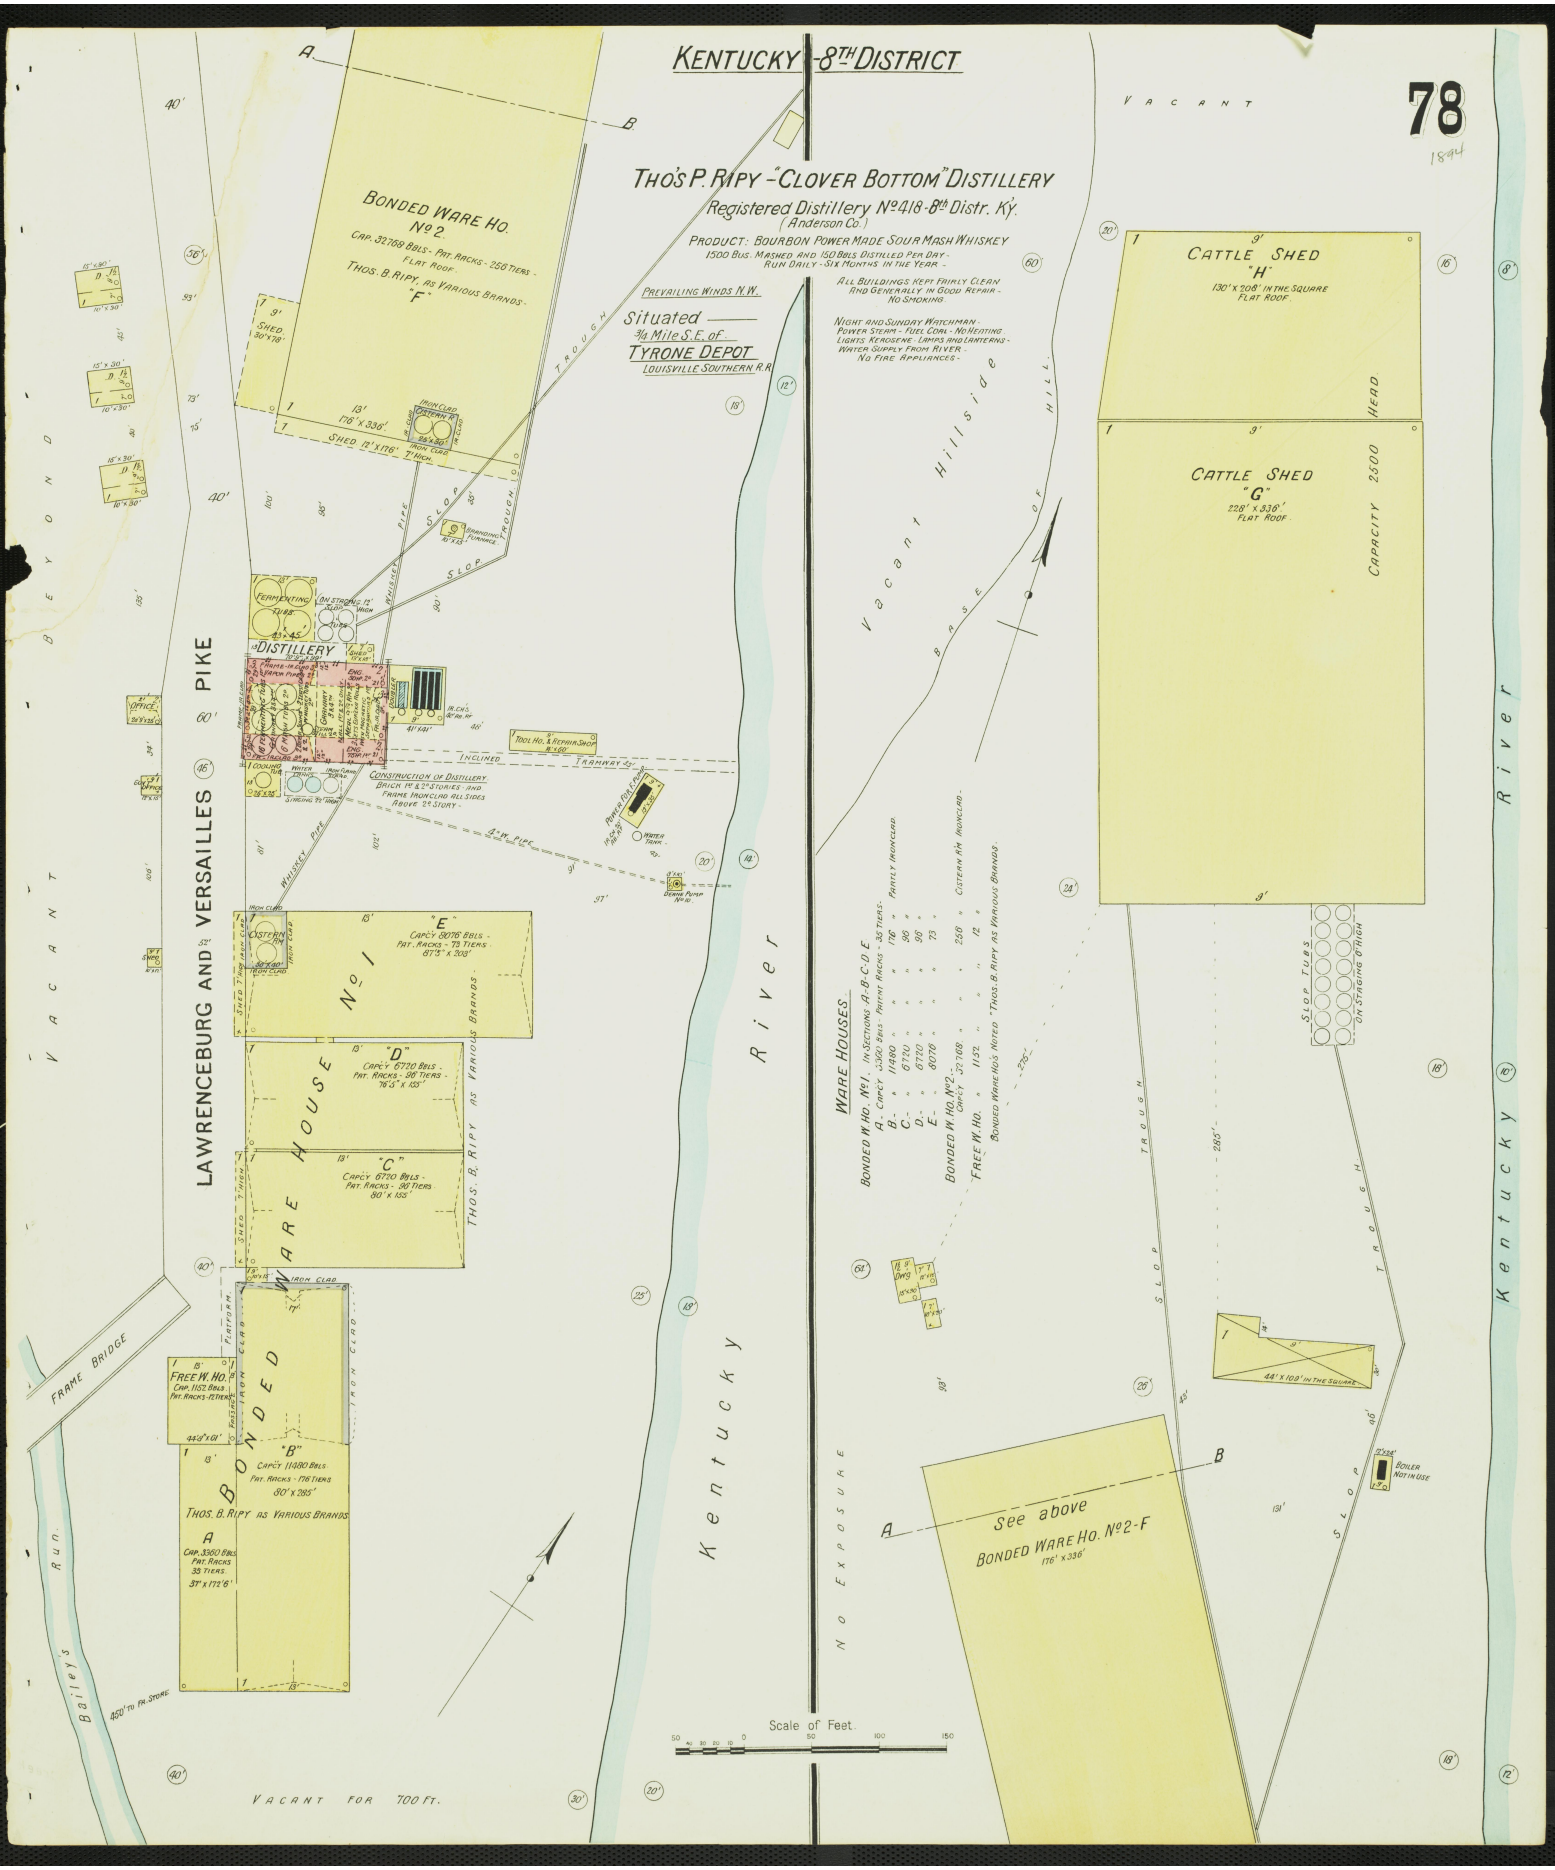
KENTUCKY - 8TH DISTRICT
78
1894
THO'S P. RIPY - "CLOVER BOTTOM" DISTILLERY
Registered Distillery No 418 - 8th Distr. Ky.
(Anderson Co.)
PRODUCT: BOURBON POWER MADE SOUR MASH WHISKEY
1500 Bus. MASHED AND 150 BBLS DISTILLED PER DAY -
RUN DAILY - SIX MONTHS IN THE YEAR -
ALL BUILDINGS KEPT FAIRLY CLEAN AND GENERALLY IN GOOD REPAIR - NO SMOKING
NIGHT AND SUNDAY WATCHMAN -
POWER STEAM - FUEL COAL - NO HEATING
LIGHTS KEROSENE LAMPS AND LANTERNS -
WATER SUPPLY FROM RIVER -
NO FIRE APPLIANCES -
PREVAILING WINDS N.W.
Situated 3/4 Mile S.E. of TYRONE DEPOT
LOUISVILLE SOUTHERN R.R.
BONDED WARE HO. No 2.
CAP. 32769 BBLS - PAT. RACKS - 256 TIERS - FLAT ROOF -
THOS. B. RIPY AS VARIOUS BRANDS -
"F"
CATTLE SHED "H"
130' X 208' IN THE SQUARE
FLAT ROOF.
CATTLE SHED "G"
228' X 336'
FLAT ROOF.
CAPACITY 2500 HEAD
DISTILLERY
OFFICE
BONDED WARE HOUSE No 1
"E" CAPCY 9076 BBLS - PAT. RACKS - 73 TIERS - 67'5" X 303'
"D" CAPCY 6720 BBLS - PAT. RACKS - 98 TIERS - 76'5" X 135'
"C" CAPCY 6720 BBLS - PAT. RACKS - 98 TIERS - 80' X 135'
THOS. B. RIPY AS VARIOUS BRANDS
"B" CAPCY 11480 BBLS - PAT. RACKS - 176 TIERS - 80' X 295'
THOS. B. RIPY AS VARIOUS BRANDS
A CAP. 3360 BBLS - PAT. RACKS 33 TIERS - 31' X 172'6"
FREE W. HO. CAP. 1152 BBLS - PAT. RACKS - 11 TIERS - 44'9" X 61'
WARE HOUSES
BONDED W. HO. No 1 - IN SECTIONS A-B-C-D-E
A - CAPCY 11480 BBLS - PATENT RACKS - 176 TIERS - PARTLY IRONCLAD.
B - " 6720 " " " 98 " "
C - " 6720 " " " 98 " "
D - " 6720 " " " 98 " "
E - " 9076 " " " 73 " "
BONDED W. HO. No 2 - CAPCY 32769 BBLS - PAT. RACKS - 256 TIERS - CISTERN RH IRONCLAD.
FREE W. HO. - " 1152 " " " 11 " "
BONDED WARE HOS. NOTED "THOS. B. RIPY AS VARIOUS BRANDS".
See above
BONDED WARE HO. No 2-F
176' X 336'
LAWRENCEBURG AND VERSAILLES PIKE
FRAME BRIDGE
Bailey's Run.
Kentucky River
VACANT
VACANT FOR 700 FT.
NO EXPOSURE
Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY - 8TH DISTRICT

79

1894

1894

VACANT AND STEEP HILLSIDE

W. H. McBRAYER'S EXECUTORS'
Cedar Brook Distillery
DANIEL L. MOORE LESSEE & DISTILLER UNDER THE STYLE OF W. H. McBRAYER
Registered Distillery No 44 - 8th Distr. Anderson Co. Ky
PRODUCTION - BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY - 650 BUS. MASHED, AND 65 BBLS. DISTILLED PER DAY -
RUN ONLY FOR 8 MONTHS IN THE YEAR
ALL BUILDINGS KEPT CLEAN AND IN GOOD REPAIR EXCEPT WHERE NOTED
NIGHT WATCHMAN WHEN RUNNING - CARRYING 1 HAUSER CLOCK -
POWER STEAM - FUEL COAL - NO LIGHTS - NO HEATING BUT STOVE IN OFFICE
WATER SUPPLY FROM BROOK AND CISTERNS -
TO HAVE 100' 1" LINEN HOSE THAT CAN BE ATTACHED TO TANK AND F. PUMP
ALSO 1½ DOZ. FIRE PAILS.

For Ware Houses See Below.

½ MILE TO WARE HOS. SEE BELOW

ROADWAY

CEDAR BROOK

SLOP TROUGH

PIPE

WHISKEY

DISTILLERY
1 BURR MILL & 1 SET BUHR MILL WITH HOISTING ELEVATOR
MEAL RM 14'X14' 1 STR GRAIN LIFT
MEAL RM ATTIC
FIRST CONE 10'6" DIA. 7'6" HIGH
FERMENTING TUBS (7)
MASH FLOOR
DOUBLER
MASH FLOOR 2ND
FERMENTING TUBS (3)
CONCRETE FLS
WATER TANK
STEAM PUMP
CISTERN
CISTERN RM
NO FINISH ON WALLS

CORN CRIB
CAP. 3000 BUS.

HOG PENS AND CATTLE SHED

HOG PENS

SLOP TUB

CISTERN

EMPTY BARREL & HAY STORAGE

SHED

SMALL BARN FOR BREEDING MARES

CONSTRUCTION 4"X6" BARSTDS. & 1" PINE BOARDS IRONCLAD ALL SIDES - BUILDING NOT IN GOOD REPAIR

LUMBER & STILL FIXTURES

Situated 2½ Miles N.W. of TYRONE DEPOT
LOUISVILLE SOUTHERN R.R.

VACANT HILLS BEYOND.

WARE HOUSES OF CEDAR BROOK DISTILLERY (ABOVE)

Situated One Mile N.W. of TYRONE DEPOT L.S.R.R. and 1½ Mile from Distillery

NO EXPOSURE ANY SIDE - GRADE LEVEL.

½ MILE TO DISTILLERY SEE ABOVE

ROADWAY

SCALES

BONDED WARE HO. A
CAPCY 10080 BBLS. PAT. RACKS - 120 TIERS
CEDAR BROOK AS DAN'L L. MOORE

BONDED WARE HO. B
CAPCY 10080 BBLS. PAT. RACKS - 120 TIERS
W. H. McBRAYER'S EXECUTORS

BONDED WARE HO. C
CAPCY 10080 BBLS. PAT. RACKS - 120 TIERS
CEDAR BROOK AS DAN'L L. MOORE

GRAIN ELEVATOR ABANDONED

STONE ROOM

INCLINED TRAMWAY 1800FT. TO KENTUCKY RIVER — NOT USED

BONDED WARE HO. A. - CEDAR BROOK AS DAN'L L. MOORE - CAPCY 10080 BBLS. - PAT. RACKS - 120 TIERS.
DO. DO. B. - W. H. McBRAYERS EXECUTORS. - CAPCY 10080 BBLS. - PAT. RACKS - 120 TIERS.
DO. DO. C. - CEDAR BROOK AS DAN'L L. MOORE - CAPCY 10080 BBLS. - PAT. RACKS - 120 TIERS.
FREE WARE HO. AS VARIOUS BRANDS - CAPCY 3548 BBLS. - PAT. RACKS - 66 TIERS.
ALL FRAME BUILDINGS WITH METAL ROOFS.
NO WATCHMAN - NO HEATING - STOVE IN OFFICE - NO LIGHTS - NO FIRE APPLIANCES.

FREE WARE HO.
(AS VARIOUS BRANDS)
CAPCY 3548 BBLS. - PAT. RACKS - 66 TIERS.

Scale of Feet.
50 40 30 20 10 0 50 100 150

KENTUCKY, 8TH DISTRICT

1894

80

EDGEWOOD DISTILLING CO.

as W. H. TRAYLOR

Registered Distillery No 76, 8th Distr.- Lincoln Co. Ky.

PRODUCTION BOURBON POWER MADE SOUR MASH WHISKEY
CAPCY.- 100 BUS. MASHED & 10 BBLS. DISTILLED PER DAY
RUN DAILY FOR 6 MONTHS OF THE YEAR

ALL BUILDINGS KEPT CLEAN AND IN GOOD REPAIR.
NO EXPOSURE ON ANY SIDE.
NO WATCHMAN. POWER STEAM. FUEL COAL.
HEAT STEAM IN DISTILLERY - NO OTHER HEATING.
LIGHTS KEROSENE LANTERNS.
HOSE AND FORCE PUMP AS SHOWN
WATER SUPPLY OBTAINED FROM BRANCH.

BONDED WARE HOUSES
No 1 - CAPCY. 1080 BBLS. PAT. RACKS 30 TIERS
No 2- " 2656 " " " 32 "

FREE WARE HO.
CAPCY. 90 BBLS.-

ALL FRAME BUILDINGS - METAL ROOFS.
KEPT CLEAN & IN GOOD REPAIR

Situated 4¼ Miles N.E. of STANFORD COURT HO.

JAMES W. JAMES AND CO.

Registered Distillery No 81, 8th Distr.- Lincoln Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY.- 30 BUS. MASHED & 5 BBLS. DISTILLED PER DAY
RUN DAILY FOR 6 MONTHS OF THE YEAR.

BUILDINGS ALL OLD BUT KEPT IN FAIRLY GOOD REPAIR.
NO WATCHMAN. POWER STEAM. FUEL COAL.
NO HEATING. LIGHTS KEROSENE LANTERNS.
NO FIRE APPLIANCES.
WATER SUPPLY FROM CREEK.
NO EXPOSURE ON ANY SIDE.

BONDED WARE HOUSES
No 1 - CAPCY. 500 BBLS. PAT. RACKS 20 TIERS
No 2- " 1000 " " " 24 "

WARE HO. No 1 - LOG BUILDING. SHINGLE ROOF.
WARE HO. No 2 - FRAME BLDG. SHINGLE ROOF.
BUILDINGS OLD BUT KEPT IN FAIRLY GOOD REPAIR.

Situated ¾ Mile South of CRAB ORCHARD DEPOT

Pond

Situated 1 Mile South of LANCASTER COURT HO.

J. W. MILLER AND CO.

Registered Distillery No 554, 8th District.
Garrard Co. Ky.

PRODUCTION BOURBON HAND MADE SOUR MASH WHISKEY
CAPCY.- 50 BUS. MASHED & 5 BBLS. DISTILLED PER DAY
RUN DAILY FOR 6 MONTHS OF THE YEAR.

ALL BUILDINGS KEPT IN GOOD REPAIR.
NO WATCHMAN. POWER STEAM. FUEL COAL.
NO HEATING EXCEPT STOVE IN OFFICE.
LIGHTS KEROSENE LANTERNS.
NO FIRE APPLIANCES.
WATER SUPPLY OBTAINED FROM POND.
NO EXPOSURE ANY SIDE - GRADE LEVEL.

WARE HOUSES
BONDED WARE HO. No 554. CAPCY. 2200 BBLS. PAT. RACKS 30 TIERS
FREE WARE NO. " " 60 "
FRAME BUILDINGS, METAL ROOFS. KEPT IN GOOD REPAIR
BONDED WARE HO. CONSTRUCTED OF 4"X6" OAK STUDDING & IRON CLAD ON ALL SIDES

Scale of Feet.

THIS PAGE LEFT BLANK FOR SURVEYS OF NEW DISTILLERIES WHICH MAY BE BUILT IN THIS DISTRICT.

94

TENNESSEE - 5TH DISTRICT

Boiling Fork

W. S. JONES

Registered Distillery No. 525 - (Brandy No. 753) 5th Distr. Franklin Co. Tenn.

PRODUCTION, HAND MADE SOUR MASH WHISKEY -
CAPCY 23 BUS. PER DAY - RUN 6 MONTHS OF YEAR
FRAME BLDG - SHINGLE ROOF -
NO WATCHMAN - NO LIGHTS - NO HEATING - FUEL COAL AND WOOD -
50' 1" HOSE

BONDED WARE HO. CAPCY 600 BBLS - NO RACKS -
BRICK AND FRAME BLDG - SHINGLE ROOF -
FIRST FLOOR OF BRICK BLDG. BRANDY HO. -
NO WATCHMAN - NO LIGHTS - NO HEATING -
WARE HO. USED FOR STORAGE ONLY -

At WINCHESTER
1/2 Mile N. of COURT HO.

ISAAC VANZANT

Registered Distillery No. 528 - 5th Distr. Franklin Co. Tenn.

PRODUCTION, HAND MADE SOUR MASH WHISKEY -
CAPCY 15 BUS. PER DAY - RUN ABOUT 3 MONTHS OF YEAR -
FRAME BLDG - SHINGLE ROOF -
NO WATCHMAN - NO LIGHTS - NO HEATING - FUEL WOOD - 50' 1" HOSE -

BONDED WARE HO. CAPCY 300 BBLS - NO RACKS
NO LIGHTS - NO HEATING

Situated 12 Miles W. of WINCHESTER

COLSHER BROS.

Registered Distillery No. 32 - 5th Distr. Franklin Co. Tenn.

PRODUCTION SOUR MASH WHISKEY -
CAPCY 24 BUS. PER DAY - RUN 8 MONTHS OF YEAR
FRAME BLDG - METAL ROOF - NO WATCHMAN -
NO LIGHTS - NO HEATING - FUEL, WOOD - 50' 1" HOSE -

BONDED WARE HO. CAPCY 1000 BBLS - NO RACKS -
FRAME BLDG - METAL AND SHINGLE ROOF -
NO LIGHTS - NO HEATING -
WARE HO. USED FOR STORAGE ONLY -

Situated 4 Miles W. of HUNTLAND
12 Miles S.E. of FAYETTEVILLE

NO EXPOSURE

J. J. THOMAS AND CO.

Registered Distillery No. 540 - 5th Distr. Franklin Co. Tenn.

PRODUCTION HAND MADE SOUR MASH WHISKEY & APPLE BRANDY -
CAPCY 11 BUS. PER DAY - RUN ABOUT 4 MONTHS OF YEAR -
FRAME BUILDING - SHINGLE ROOF -
NO WATCHMAN - NO LIGHTS - NO HEATING - FUEL WOOD -

BONDED WARE HO CAPCY 300 BBLS - NO RACKS -
BRANDY HO. " 60 " " "
FRAME BLDG - SHINGLE ROOFS -
NO HEATING - NO LIGHTS -

Situated Near AWALT
12 Miles N.W. of WINCHESTER

J. R. EASTWOOD

Registered Distillery No. 531 - 5th Distr. Franklin Co. Tenn.

PRODUCTION, HAND MADE SOUR MASH WHISKEY -
CAPCY 14 BUS. PER DAY - RUN 10 MONTHS OF YEAR
FRAME BLDG - SHINGLE ROOF -
NO WATCHMAN - NO LIGHTS - NO HEATING - FUEL WOOD -
50' 1" HOSE

BONDED WARE HO. CAPCY 250 BBLS - NO RACKS -
FRAME BLDG - SHINGLE ROOF -
NO HEATING - NO LIGHTS -

Situated 14 Miles W. of WINCHESTER
7 Miles N. of HUNTLAND

WAKEMAN AND HODGES - "MOUNTAIN SPRING DISTILLERY"

Registered Distillery No. 11 - 5th Distr. White Co. Tenn.

PRODUCTION, SOUR MASH WHISKEY -
CAPCY 64 BUS. PER DAY - DISTILLERY NOT IN OPERATION SINCE FEBUARY - 1892 -
FRAME BUILDING - SHINGLE ROOF -
NIGHT WATCHMAN - CLOCK 8 STATIONS -
NO LIGHTS EXCEPT WATCHMANS LANTERN -
FUEL COAL AND WOOD - NO HEATING -
75' 1 1/8" HOSE -

BONDED WARE HO. No. 11. CAPCY 1700 BBLS - PAT. RACKS - 3 TO 5 TIERS -
FRAME BLDG - SHINGLE AND METAL ROOF -
WATCHMAN AND CLOCK - NO HEATING - NO LIGHTS -
NO BOTTLING DONE - USED FOR STORAGE ONLY -

Situated 3 Miles S.W. of SPARTA

Scale of Feet.
50 40 30 20 10 0 50 100 150

TENNESSEE - 5TH DISTRICT

W.J. LEWIS

Formerly Run as ALEXANDER and KLINE - GILL BROS.

Registered Distillery №2517. - 5th Distr. Putnam Co. Tenn.

PRODUCTION, HAND MADE SOUR MASH WHISKEY -

CAPCY 6 BUS. PER DAY - RUN 3 MONTHS OF YEAR

FRAME BUILDING - SHINGLE ROOF - NO WATCHMAN - NO LIGHTS - NO HEATING - FUEL, COAL AND WOOD -

ALEXANDER & KLINE'S BONDED WARE HO. CAPACITY 60 BARRELS

W.J. LEWIS Do. Do. " 60 "

GILL BROS. Do. Do. " 50 "

FRAME BUILDGS - SHINGLE ROOF - NO HEATING - NO LIGHTS

Situated 1/2 Mile N.E. of DOUBLE SPRINGS

COOKVILLE and NASHVILLE ROAD

BLACKBURN FORK

J.C. BARNES - "DOUBLE SPRING DISTILLERY"

Registered Distillery №2546 - 5th Distr. Putnam Co. Tenn.

PRODUCTION, SOUR MASH WHISKEY -

CAPCY - 21 BUS. PER DAY - RUN 8 MONTHS OF YEAR -

FRAME BUILDG, SHINGLE ROOF - NIGHT WATCHMAN - NO CLOCK - STEAM HEAT - FUEL WOOD - LIGHTS, CLOSED KEROSENE LAMPS - 50' 1/4" HOSE

BONDED WARE HO. CAPCY 160 BBLS - NO RACKS - FRAME BLDG, SHINGLE ROOF - NO HEATING - NO LIGHTS -

AT DOUBLE SPRINGS 3 Miles W. of COOKVILLE

VACANT

BROOK

NO EXPOSURE

F.E. CUNNINGHAM and CO.

Registered Distillery №2533. - 5th Distr. Coffee Co. Tenn.

PRODUCTION, HAND MADE SOUR MASH WHISKEY -

CAPCY 21 BUS. PER DAY - RUN 9 MONTHS OF YEAR

FRAME BUILDG, SHINGLE ROOF - NO WATCHMAN - NO LIGHTS - NO HEATING - ONE STOVE IN OFFICE - FUEL, COAL - 40' 1/4" HOSE -

BONDED WARE HO. №1. CAPCY 400 BBLS - NO RACKS -

Do. Do. №2. " 300 " " "

NO HEATING - NO LIGHTS -

WARE HOS. USED FOR STORAGE ONLY -

AT TULLAHOMA 1/2 Mile W. of P.O.

DRIVE

CASCADE DISTILLING CO. formerly DAVIS and CO.

Registered Distillery №2392. - 5th Distr. Coffee Co. Tenn.

PRODUCTION, SOUR MASH WHISKEY -

CAPCY 63 BUS. PER DAY - - RUN ALL OF YEAR -

FRAME BLDG - SHINGLE ROOF - DOUBLER RUN BY STEAM - NO WATCHMAN - POWER WATER - NO LIGHTS - NO HEATING - ONE STOVE IN GRIST MILL - FUEL WOOD - 50' 1/4" HOSE -

"OLD" BONDED WARE HO. (30'x140') CAPCY 1200 BBLS - PAT. RACKS - 3 TO 4 TIERS -

Do. Do. (32'x100') " 1250 " " " 5 "

Do. Do. (31'x84') " 1340 " " " 8 " (BEING BUILT)

"OLD" BONDED WARE HO. FRAME BLDG, SHINGLE ROOF - BONDED WARE HOS. (32'x100') AND (31'x84') FRAME BLDGS - METAL ROOF - NO WATCHMAN - NO HEATING - NO LIGHTS - WARE HOS. USED FOR STORAGE ONLY -

CATTLE SHED 25'x60'

Situated 4 Miles N. of TULLAHOMA 2 1/2 Miles S.E. of NORMANDY

SPRING CREEK

HIGH HILL

F.J. DAVIS - "BIG SPRING DISTILLERY"

Registered Distillery №527. - 5th Distr. - Coffee Co. Tenn.

PRODUCTION, SOUR MASH WHISKEY -

CAPCY 26 BUS. PER DAY - RUN ALL YEAR

FRAME BLDG METAL AND SHINGLE ROOF - NO WATCHMAN - NO LIGHTS - FUEL, COAL - NO HEATING - STOVE IN OFFICE - 30' 1/4" HOSE

BONDED WARE HO. CAPCY 900 BBLS - STEAM - 4 TIERS - PAT. RACKS - STORAGE ONLY - 40'x90'

BONDED WARE HO. CAPCY 900 BBLS - PAT. RACKS - 3 TO 4 TIERS - FRAME BUILDING - METAL AND SHINGLE ROOF - NO WATCHMAN - NO LIGHTS - NO HEATING - WARE HO. USED FOR STORAGE ONLY -

AT TULLAHOMA 3/4 Mile S.W. of P.O.

VACANT FIELDS

NO EXPOSURE

Scale of Feet.

50 40 30 20 10 0 50 100 150

TENNESSEE - 5TH DISTRICT

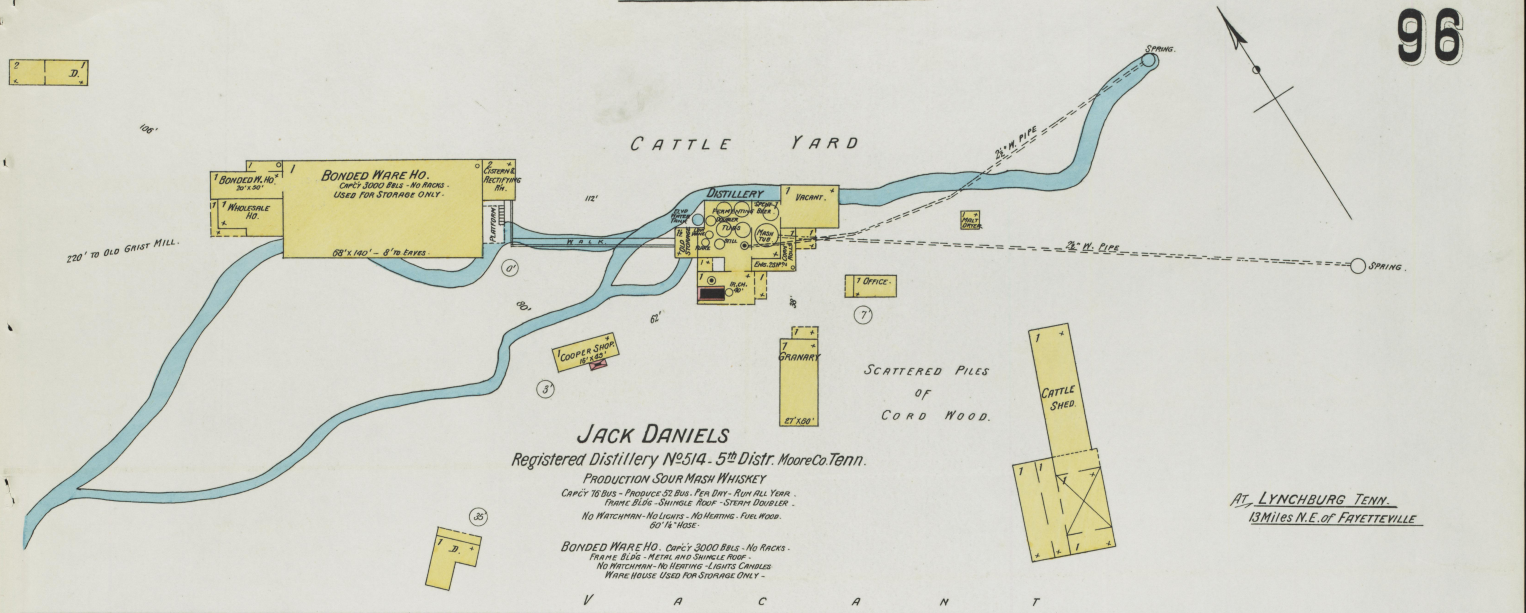

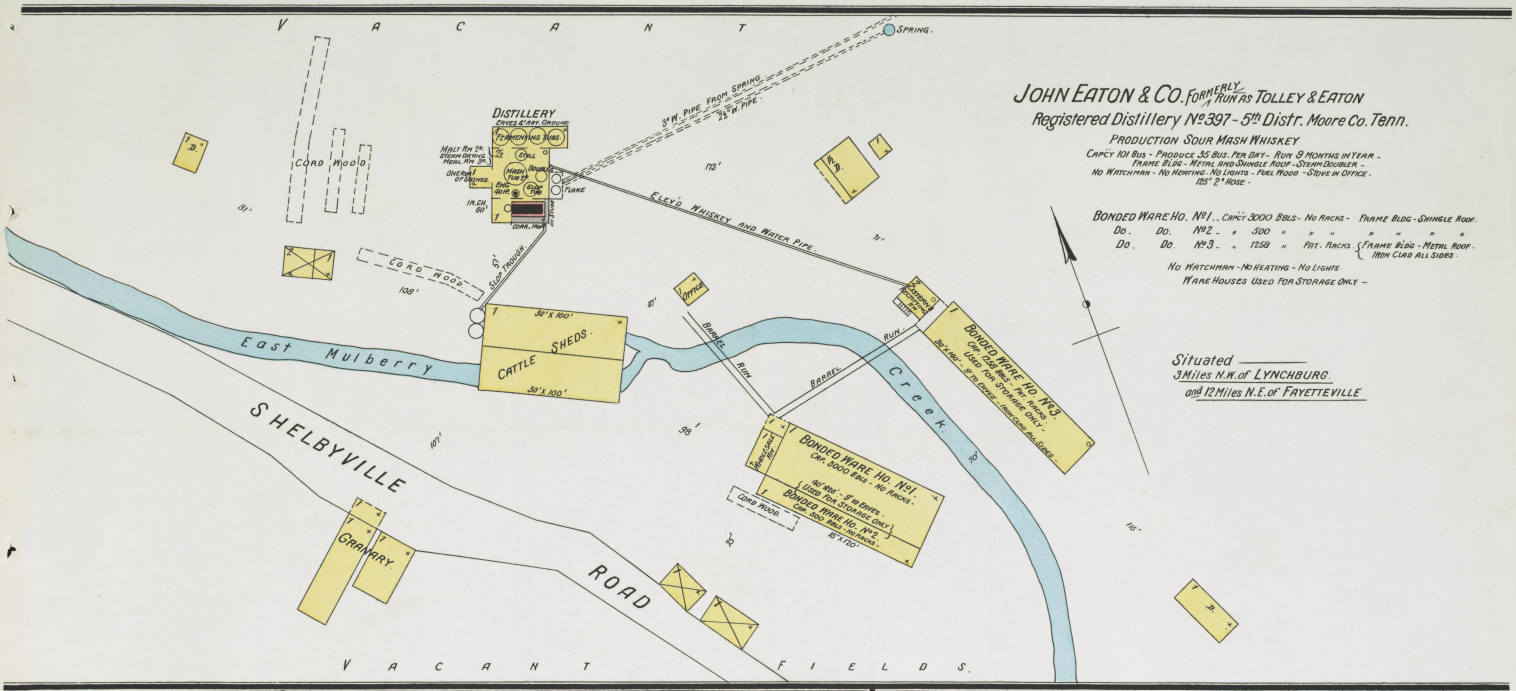

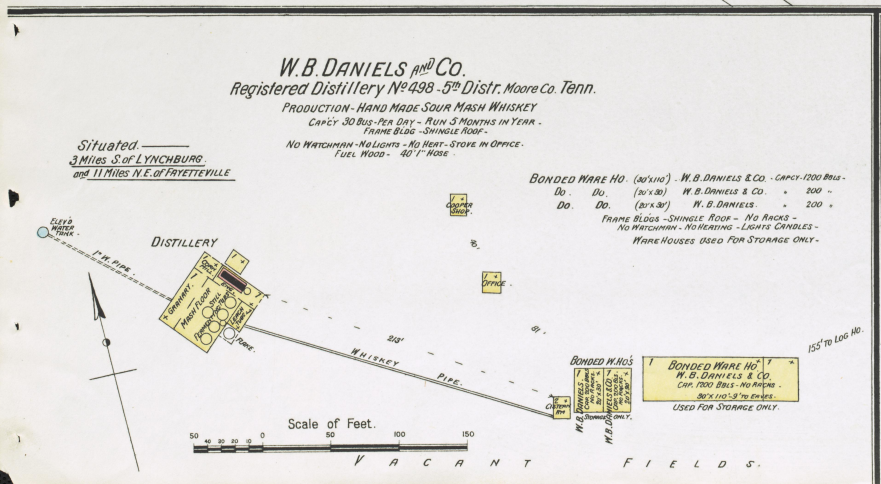

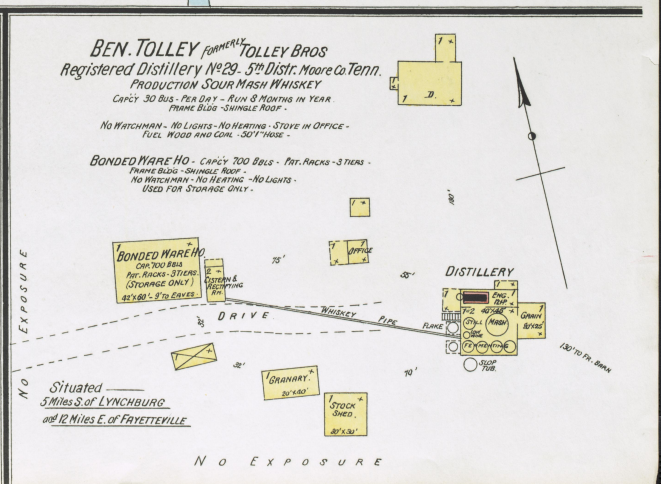

97

TENNESSEE - 5TH DISTRICT

1894

PITT BROS - CAVE SPRING DISTILLERY

Formerly W. Pitt & Son.
Registered Distillery No 135 - 5th Distr. Robertson Co. Tenn.
Production - Hand Made Sour Mash Whiskey -
Capcy - 27 Bus. Per Day - Run Full Capcy For 5 Months In Year
Log Building - Shingle Roof -

No Watchman - No Lights - No Heating - Fuel Wood -
Water Supply From Spring - No Fire Appliances -

Bonded Ware Ho. (36'x85') Capcy 600 Bbls - No Racks - Frame Bldg -
Do. Do. (32'x42') " 600 " " " Log. Bldg.
Do. Do. (12'x42') " 150 " " " Frame Bldg.
Free Ware Ho. (16'x42') " 180 " " " Frame Bldg.
No Watchman - No Lights - No Heating -
Ware Houses Used For Storage Only -

Situated 5 Miles E. of Springfield Tenn.

KINNEY AND CO.
Spring Creek Distillery

Formerly Run As John Woodard
H. H. Kirk & Co.
Registered Distillery No 110 - 5th Distr. Tenn.
(Robertson Co.)
Production Sweet Mash Whiskey
Capcy 125 Bus. Per Day -
Not In Operation Since June 1890
Distillery of Brick and Frame - Metal Roof - Steam Doublers
No Watchman - Lights Kerosene - Fuel Coal and Wood
No Heating - No Fire Appliances -

Kinney & Co. Bonded W. Ho. No 1 - Capcy 1600 Bbls - No Racks
Do. Do. No 2 - " 1600 " "
Do. Do. No 3 - " 3600 " "
Brick Bldgs - Metal Roof - Frame Cornice All Around
Tin Clad Shutters All Sides -
No Watchman - No Heating -
Lights Kerosene, Closed Lamps, and Candles -
Ware Houses Used For Storage Only -

Situated 4 Miles W. of Springfield, Tenn.

G. W. SWOR
Registered Distillery No 2/22 - 5th Distr. Henry Co. Tenn.

Capcy 18 Bus. Per Day - Run 5 Months In Year -
Distillery of Brick, With Shingle Roof - Steam Doubler -
No Watchman - Lights Kerosene - Fuel Wood -
No Heating Except Stove In Grd. And Open Grate In Office -
F. Pump And Small Hose In Fire Room -

G. W. Swor's Flour Mill
Capcy 40 Bbls In 24 Hours -
1st Floor - 3 Stand Man Hood Rolls -
One Run of Stones -
2d Do. 1 Crandon Scourer -
Bolting &c. -

Bonded Ware Ho. (16'x25') Capcy 50 Bbls
Do. Do. (11'x17') " 40 "
Free Ware Ho. 16'x16' " 40 -
Log Bldgs - Shingle Roof - No Racks
No Heating - No Lights -

Situated near Buchanan Tenn.
16 Miles N.E. of Paris.

THE SNOW SPRING DISTILLING CO.
Registered Distillery No 553 - 5th Distr. Henry Co. Tenn.

Production Hand Made Sour Mash Whiskey
Capcy 42 Bus. Per Day - Run Full Capcy All Year -
Frame Building - Shingle Roof - Steam Doubler -
Night Watchman - No Clock - No Heating - Stove In Office -
Lights Kerosene - Fuel Wood - 600 1" Hose -
Water Supply From Spring -

Bonded Ware Ho. No 1. - Capcy 400 Bbls - No Racks -
Do. Do. No 2 " 600 " " "
Frame Buildings - Shingle Roof - No Lights - No Heating -
Ware Houses Used For Storage Only - No Racks.

Situated 2½ Miles North of Paris - Tenn.

J. H. WOODARD
Registered Distillery No 521 - 5th Distr. Robertson Co. Tenn.

Production Sweet Mash Whiskey
Capcy 42 Bus. Per Day - Run 6 Months In Year -
Frame Bldg - Shingle Roof - Steam Doubler -
No Watchman - Fuel Wood - No Heating - No Lights -
No Fire Appliances -

Bonded Ware Ho - (40'x80') Capcy 500 Bbls - No Racks.
Frame Bldg - Shingle Roof -
Do. Do. (20'x45') Capcy 200 Bbls - No Racks.
Log Bldg - Shingle Roof -
No Watchman - No Lights - No Heating -
Ware Houses Used For Storage Only -

Situated 4¼ Miles E. of Springfield, Tenn.

Scale of Feet.

TENNESSEE, 5TH DISTRICT

LOUISA NELSON AS CHAS. NELSON - "GREENBRIER DISTILLERY"

Registered Distillery No. 5, 5th Distr. - Robertson Co., Tenn.

PRODUCTION SOUR MASH WHISKEY
CAPCY. - 3/4 BUSHELS MASHED PER DAY
RUN NIGHT & DAY FOR ABOUT 8 MONTHS OF THE YEAR.

Situated 8 Miles South of SPRINGFIELD and 1 Mile E. of GREENBRIER

~ DISTILLERY ~
FRAME BUILDING - METAL & SHINGLE ROOF.
CONSTANT WATCHMAN WHEN RUNNING. -
NO HEATING EXCEPT STOVE IN OFFICE.
LIGHTS KEROSENE, CLOSED LAMPS.
FUEL COAL & WOOD. - STEAM DOUBLER.
WATER SUPPLY FROM WELLS & SPRING.
100' OF 1½" HOSE

~ WARE HOUSES ~
"NEW" BONDED WARE HO. CAPCY. - 6000 BBLS. PAT. RACKS. 12 TIERS.
"OLD" BONDED WARE HO. " 6000 " NO RACKS.
BRICK BUILDINGS - METAL ROOFS. TIN CLAD SHUTTERS ALL SIDES.
CONSTANT WATCHMAN WHEN RUNNING. NO HEATING.
LIGHTS KEROSENE, CLOSED LAMPS.
WARE HOUSES USED FOR STORAGE ONLY.

JOHN R. BRIDGES, AND SON, - "PEBBLY SPRING DISTILLERY"

Registered Distillery No. 83, 5th Distr. - Robertson Co. Tenn.

PRODUCTION SWEET MASH WHISKEY
CAPCY. - 42 BUS. MASHED PER DAY.
RUN 8 MONTHS OF THE YEAR.

FRAME BUILDING. METAL & SHINGLE ROOF.
NO WATCHMAN. NO HEATING. FUEL COAL & WOOD
LIGHTS KEROSENE, CLOSED LAMPS.
STEAM DOUBLER. - 30' OF 1½" HOSE.

~ WARE HOUSES ~
BONDED WARE HO. No. 1 CAPCY. 400 BBLS. NO RACKS.
DO. DO No. 2 " 500 " " "
DO. DO No. 3 " 500 " " "
FRAME BUILDINGS WITH SHINGLE ROOFS.
NO WATCHMAN. NO HEATING.
WARE HO. No. 1 USED AT PRESENT AS GRANARY
SELDOM USED AS BONDED WARE HO.
WARE HOS. 2 & 3 USED FOR WHISKEY STORAGE ONLY.

Situated 3 Miles S.E. of SPRINGFIELD

G. E. ROGERS

Registered Distillery No. 505, 5th Distr.
Obion Co., Tenn.

~ DISMANTLED ~
Not in Operation Since June '91.

Situated Near CRYSTAL and 10 Miles S.W. of HICKMAN KY.

JOSEPHINE BROWN AS RAGSDALE AND PECK - "WARTRACE DISTILLERY"

Formerly J. S. BROWN -
Registered Distillery No. 524, 5th Distr. - Robertson Co. Tenn.

PRODUCTION SOUR MASH WHISKEY
CAPCY. - 51 BUS. MASHED PER DAY.
RUN ALL THE YEAR ROUND.

FRAME BUILDING WITH METAL ROOF.
NO WATCHMAN. FUEL COAL & WOOD
NO HEATING EXCEPT STOVE IN OFFICE
LIGHTS KEROSENE CLOSED LAMPS.
STEAM DOUBLER. 100' OF 1½" HOSE

JOSEPHINE BROWN - BONDED WARE HOUSE
CAPCY. 1200 BBLS. - NO RACKS.
FRAME BUILDING. METAL ROOF. IR CLAD ALL SIDES.
NO HEATING - NO LIGHTS
WARE HO. USED FOR STORAGE ONLY.

Situated ½ Mile East of SPRINGFIELD

Scale of Feet.

TENNESSEE - 5TH DISTRICT

1894

B. PATTERSON
Registered Distillery №393, 5th Distr.- Bedford Co. Tenn.

PRODUCTION SOUR MASH WHISKEY
CAPCY.-10 BUS. MASH PER DAY
RUN ABOUT 4 MONTHS OF YEAR
FRAME BUILDING.-SHINGLE ROOF
NO WATCHMAN. NO HEATING.
FUEL WOOD. NO LIGHTS.

BONDED WARE HO. CAPCY. 150 BBLS. NO RACKS.
NO HEATING. - NO LIGHTS.

Situated 2 Miles S. of NORMANDY
and 5 Miles N.W. of TULLAHOMA

BRINKLEY AND HORNADAY
Registered Distillery №963, 5th Distr.- Bedford Co., Tenn.

PRODUCTION HAND MADE SOUR MASH WHISKEY
CAPCY.- 14 BUS. MASH PER DAY.- RUN ALL YEAR

FRAME BUILDING.- SHINGLE ROOF.
NO WATCHMAN. NO FIRE APPS.
NO HEATING, STOVE IN OFFICE.
NO LIGHTS.

BONDED WARE HOUSE
CAPCY.- 800 BBLS.- NO RACKS.
NO HEATING.- NO LIGHTS.

Situated 4½ Miles West of
TULLAHOMA

T. F. WOOTEN
Registered Distillery №515, 5th District,- Bedford Co., Tenn.

PRODUCTION SOUR MASH WHISKEY.
CAPCY.-7.3 BUS. MASH PER DAY
Not in Operation Since Nov. 1890.
— DISMANTLED —

FRAME BUILDING.-SHINGLE ROOF.
NO WATCHMAN. — NO HEATING
NO LIGHTS. NO FIRE APPLIANCES.

Situated 7¼ Miles N.W. of TULLAHOMA
and 3 Miles South of NORMANDY

BONDED WARE HO. (24'x56') CAPCY. 600 BBLS. PAT. RACKS 4 TIERS
Do. Do. (22'x70') " 250 " NO RACKS.
NO HEATING - NO LIGHTS.

W.J. CRAIGHEAD AND SON.
Registered Distillery №547, 5th Distr.- Smith Co. Tenn.

PRODUCTION HAND MADE SOUR MASH WHISKEY.
CAPCY.- 7 BUS. MASH PER DAY.
RUN ABOUT 4 MONTHS OF YEAR.

FRAME BUILDING.- SHINGLE ROOF.
NO WATCHMAN.- NO HEATING
NO LIGHTS.- NO FIRE APPS.

AT DEFEATED,-
and 12 Miles N.E. of CARTHAGE.

JOHN H. CASHION - "HAWTHORNE DISTILLERY"
Formerly CASHION AND MARTIN
Registered Distillery № 64.- 5th Distr.- Bedford Co., Tenn.

PRODUCTION SOUR MASH WHISKEY.
CAPCY.- 15 BUS. MASH PER DAY.
RUN 10 MONTHS PER YEAR.

FRAME BUILDING. SHINGLE ROOF.
NO WATCHMAN. NO HEATING-
STOVE IN OFFICE. NO LIGHTS.
FUEL WOOD. — 50' ¾" HOSE.

CASHION AND MARTIN-BONDED WARE HO.- CAPCY. 500 BBLS. NO RACKS.
JOHN H. CASHION- BONDED WARE HO. " 110 " " "
FRAME BUILDINGS, SHINGLE ROOFS.
NO WATCHMAN. NO HEATING, NO LIGHTS.
WARE HOS. USED FOR STORAGE ONLY.

Situated 11 Miles N.W. of LYNCHBURGH
and 10 Miles S. of SHELBYVILLE

Situated 8 Miles N.W. of
TULLAHOMA

J. W. C. MITCHELL
Registered Distillery №503, 5th Distr.- Bedford Co. Tenn.

PRODUCTION SOUR MASH WHISKEY
CAPCY.- 2½ BUS. MASH PER DAY.
RUN ALL OF THE YEAR

FRAME BUILDING - SHINGLE ROOF
NO WATCHMAN. NO HEATING -
STOVE IN OFFICE. FUEL WOOD.
KEROSENE LANTERNS USED OCCASIONALLY
WATER SUPPLY FROM SPRING.
FORCE PUMP & 40 OF 1" HOSE.

BONDED WARE HO. CAPCY. 1000 BBLS. NO RACKS.
FRAME BUILDING: SHINGLE ROOF.
NO HEATING. NO LIGHTS.—
USED FOR STORAGE ONLY.—

Scale of Feet.

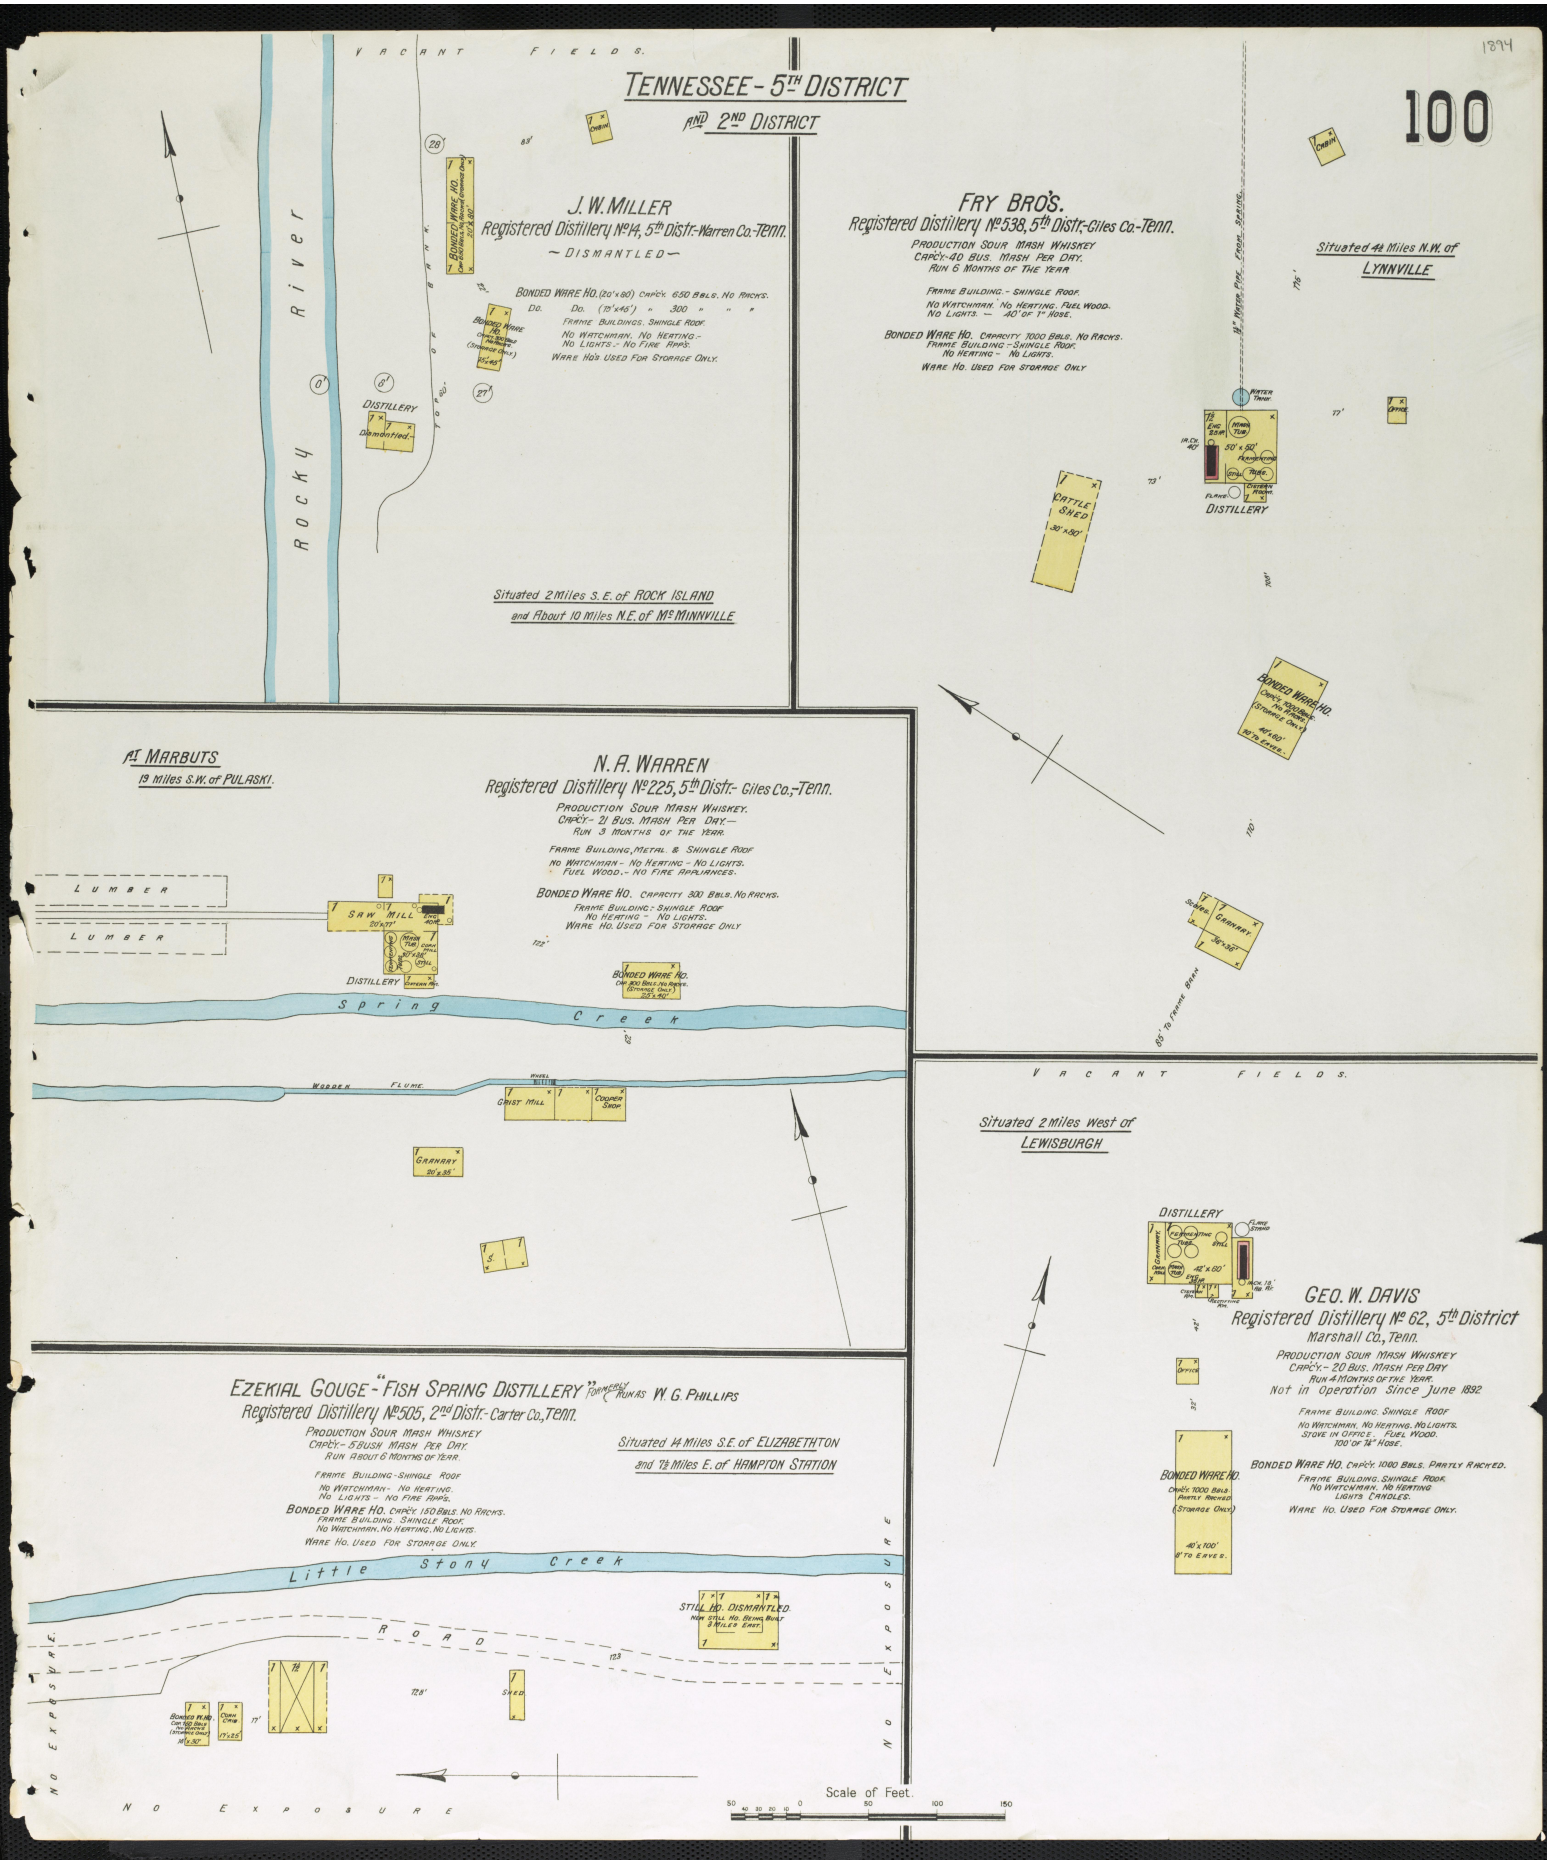
1894
100
TENNESSEE - 5TH DISTRICT
AND 2ND DISTRICT
VACANT FIELDS.
ROCKY RIVER
J. W. MILLER
Registered Distillery No 14, 5th Distr.-Warren Co.-Tenn.
~ DISMANTLED ~
BONDED WARE HO. (20'x80') CAP'CY. 650 BBLS. NO RACKS.
DO. DO. (15'x45') " 300 " " "
FRAME BUILDINGS. SHINGLE ROOF.
NO WATCHMAN. NO HEATING.-
NO LIGHTS.- NO FIRE APP'S.
WARE HO'S USED FOR STORAGE ONLY.
DISTILLERY
Diamonted.
Situated 2 Miles S.E. of ROCK ISLAND
and About 10 Miles N.E. of McMINNVILLE
FRY BRO'S.
Registered Distillery No 538, 5th Distr.-Giles Co.-Tenn.
PRODUCTION SOUR MASH WHISKEY
CAP'CY.-40 BUS. MASH PER DAY.
RUN 6 MONTHS OF THE YEAR
FRAME BUILDING.- SHINGLE ROOF.
NO WATCHMAN. NO HEATING. FUEL WOOD.
NO LIGHTS. — 40' OF 1" HOSE.
BONDED WARE HO. CAPACITY 7000 BBLS. NO RACKS.
FRAME BUILDING - SHINGLE ROOF.
NO HEATING - NO LIGHTS.
WARE HO. USED FOR STORAGE ONLY
Situated 4½ Miles N.W. of LYNNVILLE
DISTILLERY
CATTLE SHED
30'x80'
BONDED WARE HO.
AT MARBUTS
19 Miles S.W. of PULASKI.
N. A. WARREN
Registered Distillery No 225, 5th Distr.- Giles Co.,-Tenn.
PRODUCTION SOUR MASH WHISKEY.
CAP'CY.- 21 BUS. MASH PER DAY.—
RUN 3 MONTHS OF THE YEAR.
FRAME BUILDING, METAL & SHINGLE ROOF
NO WATCHMAN - NO HEATING - NO LIGHTS.
FUEL WOOD.- NO FIRE APPLIANCES.
BONDED WARE HO. CAPACITY 300 BBLS. NO RACKS.
FRAME BUILDING.- SHINGLE ROOF
NO HEATING - NO LIGHTS.
WARE HO. USED FOR STORAGE ONLY
LUMBER
LUMBER
SAW MILL
DISTILLERY
BONDED WARE HO.
Spring Creek
WOODEN FLUME
GRIST MILL
COOPER SHOP
GRANARY
VACANT FIELDS.
Situated 2 Miles West of LEWISBURGH
DISTILLERY
GEO. W. DAVIS
Registered Distillery No 62, 5th District
Marshall Co., Tenn.
PRODUCTION SOUR MASH WHISKEY
CAP'CY.- 20 BUS. MASH PER DAY
RUN 4 MONTHS OF THE YEAR.
Not in Operation Since June 1892
FRAME BUILDING. SHINGLE ROOF
NO WATCHMAN. NO HEATING. NO LIGHTS.
STOVE IN OFFICE. FUEL WOOD.
100' OF 7½" HOSE.
BONDED WARE HO. CAP'CY. 1000 BBLS. PARTLY RACKED.
FRAME BUILDING. SHINGLE ROOF.
NO WATCHMAN. NO HEATING
LIGHTS CANDLES.
WARE HO. USED FOR STORAGE ONLY.
BONDED WARE HO.
EZEKIAL GOUGE - "FISH SPRING DISTILLERY" FORMERLY RUN AS W. G. PHILLIPS
Registered Distillery No 505, 2nd Distr.- Carter Co., Tenn.
PRODUCTION SOUR MASH WHISKEY
CAP'CY.- 5 BUSH MASH PER DAY.
RUN ABOUT 6 MONTHS OF YEAR.
FRAME BUILDING - SHINGLE ROOF
NO WATCHMAN - NO HEATING.
NO LIGHTS - NO FIRE APP'S.
BONDED WARE HO. CAP'CY. 150 BBLS. NO RACKS.
FRAME BUILDING. SHINGLE ROOF.
NO WATCHMAN. NO HEATING. NO LIGHTS.
WARE HO. USED FOR STORAGE ONLY.
Situated 14 Miles S.E. of ELIZABETHTON
and 7½ Miles E. of HAMPTON STATION
Little Stony Creek
ROAD
STILL HO. DISMANTLED.
NO EXPOSURE
NO EXPOSURE
NO EXPOSURE
Scale of Feet.
50 40 30 20 10 0 50 100 150

101
TENNESSEE - 5TH DISTRICT
1894
THE COPELAND CO.
FORMERLY N.J. GEORGE - F.M. FRANKLIN
Registered Distillery No 210 - 5th Distr. Lincoln Co. Tenn.
PRODUCTION - SOUR MASH WHISKEY
Capcy 40 Bus. Per Day - Run 8 Months in Year - Frame Bldg - Shingle Roof -
No Watchman - Lights Kerosene Open Lamps - No Heat - Fuel Coal - 15 1/2 Hose -
BONDED WARE HO. Capcy 2254 Bbls - No Racks - Frame Bldg - Shingle Roof
Lights Kerosene - Closed Lamps Only Used Occasionally - No Heating -
At FLINTVILLE
10 Miles S.E. of FAYETTEVILLE
Flint River
Wood Flume
Mill
Cattle Shed
Distillery
Bonded Ware Ho.
J. John M. Franklin
Copeland & Co.
N.J. George
Copeland Co.
Copeland & Co.
N.J. George
Copeland Co.
N.J. George
80' x 150' - 7 to Eaves - No Racks -
No Exposure
WM. BERRY
Registered Distillery No 388 - 5th Distr. Lincoln Co. Tenn.
PRODUCTION - HAND MADE SOUR MASH WHISKEY.
Capcy 14 Bus. Per Day - Run 4 Months in Year - Frame Bldg - Shingle Roof -
No Watchman - No Heating - No Lights - Fuel Wood - No Fire Appliances
BONDED WARE HO. Capcy 300 Bbls - No Racks - Frame Bldg - Shingle Roof - No Heating - No Lights -
Situated 3 Miles N.E. of FLINTVILLE and 9 Miles E. of FAYETTEVILLE
No Exposure
Brook
Distillery
Cattle Sheds
Granary
About 300 Yards to Ware Ho.
Bonded W. Ho.
Vacant Fields
TOLLEY and EATON - formerly W.M. TOLLEY & CO.
Registered Distillery No 533 - 5th Distr. Lincoln Co. Tenn.
Capcy 12 Bbls. Per Day - Run 9 Months in Year - Frame Bldg - Shingle Roof -
No Watchman - Heat Stoves - Fuel Coal and Wood - 60' Hose -
Production Sour Mash Whiskey.
Bonded W. Ho. (Brick) Tolley & Eaton Capcy 1000 Bbls - Pat. Racks - 3 Tiers
Do. Do. (30' x 80') W.M. Tolley as Tolley & Eaton " 800 " " " 4 "
Do. Do. (30' x 80') Do. " 1200 " " " 4 "
Frame Bldgs - Metal Roof - No Watchman - No Heat - Lights Candles - Ware Houses Used Storage Only -
Bonded Ware Houses
W.M. Tolley & Eaton
Tolley & Eaton
Vacant
Brook
Distillery
Cattle Pen
Fermenting
Malt Drying
Granary
Barn
Shed
11" Water Pipe
Situated 10 Miles S.E. of FAYETTEVILLE 2 1/2 Miles S. of KELSO
Vacant Fields
JOHN D. TOLLEY
Registered Distillery No 549 - 5th Distr.
Lincoln Co., Tenn.
PRODUCTION SOUR MASH WHISKEY
Capcy 5 Bus. Per Day - Run 8 Months in Year - Frame Bldg - Metal and Shingle Roof -
No Watchman - Lights Kerosene, Closed Lamps - Fuel Wood and Coal - No Heating - 30' 1/2 Hose -
Bonded Ware Ho - Capcy 1800 Bbls - Patent Racks - 8 Tiers - Frame Bldg - Metal Roof - No Watchman - No Heating - Lights Kerosene Closed Lamps - Used Occasionally - Used For Storage Only -
Situated 5 Miles W. of LYNCHBURG and 11 Miles N.E. of FAYETTEVILLE
Bonded W. Ho.
Lois Creek Road
Distillery
Fermenting
Engine
Mash Tub
Still
Clarke
Slop Trough
Mulberry Creek
Spring
Cattle Shed
Slop Tub
Scale of Feet.
50 40 30 20 10 0 50 100 150
No Exposure
C.H. BUVINGER & CO.
Stonesboro Distillery
Formerly Run as J.J. THOMAS & CO. - J.W. STONE
Registered Distillery No 211 - 5th Distr. Lincoln Co. Tenn.
Brandy Distillery No 785
PRODUCTION - HAND MADE SOUR MASH WHISKEY
Capcy 20 Bbls. Per Day - Run 6 Mos. in Year - Frame Bldg - Metal & Shingle Roof -
No Watchman - Fuel Wood - No Heating - No Lights - 50' 1" Hose - Water Supply from Spring -
Bonded Ware Ho. - C.H. Buvinger & Co. - Capcy. 450 Bbls
Do. Do. - J.J. Thomas & Co. " 350 "
Frame Bldg - Shingle Roof - No Racks - No Heating - No Lights - Used for Storage Only -
Distillery
Malt Drying
Cooper Shop
Office
Tenant H. No.
Situated 11 Miles N. of FAYETTEVILLE
C.H. Buvinger & Co. Bonded W. Ho
J.J. Thomas & Co. Bonded W. Ho.
Fayetteville and Shelbyville Pike
No Exposure